

TECHNICAL REPORT

On the

**Titan Gold Property
Klotz Lake Area, NTS Map 42F
Thunder Bay Mining District
Northwestern Ontario, Canada**

Prepared for:

**SOLDERA MINING CORP.
6th Floor 905 West Pender Street
Vancouver, BC
V6C 1L6**

Prepared by:

**Martin Ethier, P.Geol.
Consulting Geologist
Hinterland Geoscience and Geomatics
620 Brewster Street.
Haileybury, Ontario
P0J 1K0**

**June 12, 2020
(Effective Date: June 12, 2020)**

TABLE OF CONTENTS

1.0	SUMMARY.....	6
2.0	INTRODUCTION.....	10
2.1	Purpose of Report.....	10
2.2	Sources of Information	10
3.0	RELIANCE ON OTHER EXPERTS.....	10
4.0	PROPERTY DESCRIPTION AND LOCATION.....	11
5.0	ACCESS, CLIMATE, PHYSIOGRAPHY, LOCAL RESOURCES, AND INFRASTRUCTURE.....	17
5.1	Access.....	17
5.2	Climate	17
5.3	Physiography.....	19
5.4	Local Resources and Infrastructure	19
6.0	HISTORY	20
6.1	Work by Goldstream and Prodigy 2011-12	30
6.1.1	Field Exploration	30
6.1.2	Diamond Core Drilling.....	30
6.1.3	Diamond Core Drilling Results	31
6.2	2016 Exploration Work	33
6.3	2019 – 20 Exploration Work by Pleson Geoscience	35
6.3.1	Mapping, Prospecting, Trenching, and Sampling	35
6.3.2	Ground Geophysical Survey 2020.....	39
7.0	GEOLOGICAL SETTING AND MINERALIZATION	43
7.1	Regional Geology	43
7.2	Property Geology	44
7.3	Mineralization	45
8.0	DEPOSIT TYPES	50
9.0	EXPLORATION	52
10.0	DRILLING	52
11.0	SAMPLE PREPARATION, ANALYSES AND SECURITY	52
11.1	2011-12 Drill Core Samples Goldstream and Prodigy	52
11.2	Samples from Other Exploration Work.....	53
11.3	Author Collected Samples.....	54
12.0	DATA VERIFICATION.....	54
13.0	MINERAL PROCESSING AND METALLURGICAL TESTING	59
14.0	MINERAL RESOURCE ESTIMATES.....	59
23.0	ADJACENT PROPERTIES.....	59
23.1	Prodigy Gold’s Hardrock East Project	59
23.2	Greenstone Gold Mines Group Viper Property	60
24.0	OTHER RELEVANT DATA AND INFORMATION	62
24.1	Environmental Concerns.....	62

25.0 INTERPRETATION AND CONCLUSIONS 62

26.0 RECOMMENDATIONS 65

 26.1 Budget..... 66

27.0 REFERENCES 67

28.0 SIGNATURE PAGE 70

29.0 CERTIFICATE OF AUTHOR..... 71

LIST OF FIGURES

Figure 1: Property Location Map	15
Figure 2: Claim map with physiography	16
Figure 3: Greenstone Average Annual Temperatures (Source: Weatherspark.com)	18
Figure 4: Greenstone Average Annual Precipitation (Source: Weatherspark.com).....	18
Figure 5: Location of Mineral Showings and Historical Drill Holes.....	25
Figure 6: Historical drill hole detailed map A.....	26
Figure 7: Historical drill hole detailed map B.....	27
Figure 8: Historical drill hole detailed map C.....	28
Figure 9: Historical drill hole detailed map D	29
Figure 10: 2019-20 Sampling and Trench Location Map	37
Figure 11: 2019 Updated Map of the Property Geology	38
Figure 12: Ground 2019-20 geophysical survey grid location	40
Figure 13: Iron grid geophysical survey interpretation map	41
Figure 14: Geophysical survey map of Morrow Grid.....	42
Figure 15: Regional geology map of Beardmore – Geraldton Greenstone Belt	46
Figure 16: Regional Geology map.....	47
Figure 17: Property Geology Map.....	48
Figure 18: Property geology map with historical Solarus Grid	49
Figure 19: Location of samples collected by the Author	58
Figure 20: Adjacent Properties Map.....	61

LIST OF TABLES

Table 1: List of Property Claims	13
Table 2: Historical work summary 1958-2004	21
Table 3 : Mineral showings summary provided in MDI database	22
Table 4: Highlights of historical drill intersections Tomorrow Lake Showing	24
Table 5: Highlights of 2011 Titan Showing Channel Sampling Program	30
Table 6: 2012 Diamond Drill Program	31
Table 7: 2012 Titan Showing Drill Results Highlights	32
Table 8: 2016 sampling results	34
Table 9: Grab samples details	35
Table 10: Sample description from May 23, 2020 Property visit	56
Table 11: Phase 1 budget	66

LIST OF PHOTOS

Photo 1: Titan showing looking NW (May 23 Property visit)	55
Photo 2: Historical drill core (May 23 Property visit)	55
Photo 3: Taking verification sample along historical channel cut (May 23 Property visit) ..	56

1.0 SUMMARY

Martin Ethier, P.Geo., (the “author”) was retained by Soldera Mining Corp. (“Soldera” or the “Company”) to prepare an independent Technical Report on the Titan Gold Property (the “Property”). The purpose of the report is to meet the listing requirements of the Canadian Securities Exchange (the “CSE”).

The Property consists of 34 mining claims totalling approximately 2,312.25 hectares land in the Klotz Lake Area, Thunder Bay Mining District of Northwestern Ontario, Canada. Soldera has the option to acquire 100% of the right, title and interest in and to the Property from Alex Pleson, the current owner of the Property, by making aggregate cash payments of \$140,000, issuing an aggregate of 900,000 common shares, and carrying out exploration work totaling \$360,000.

Geologically, the Property is situated in the Wabigoon Subprovince of the Superior Geological Province. This Subprovince consists mainly of Archean metavolcanic and metasedimentary rock sequences intruded by larger granitoid plutons, mainly granodiorite to granite in composition. Locally, the Klotz Lake area is underlain by late Archean rocks of the Beardmore Geraldton greenstone belt (BGB). The BGB extends from Lake Nipigon to the east of Long Lac, for a total length of approximately 150km and width of 30km. The Titan property lays on the eastern most end of the BGB. The BGB is a relatively small greenstone belt located at the boundary between the Quetico Subprovince and the eastern Wabigoon Subprovince of the Superior Province. The Onaman - Tashota greenstone belt, part of the Wabigoon Subprovince, contacts the BGB to the north. The Wabigoon is ~70% basaltic metavolcanics with thin interformational chemical plus clastic metasedimentary units. The metavolcanics & metasediments have been intruded by felsic to intermediate intrusives (including the gold bearing Elmhirst Lake Stock and Kaby Lake Stock), ranging from trondhjemite to granodiorite, and quartz-monzonite. The metavolcanics and metasediments have undergone greenschist metamorphism.

In the Klotz Lake region, gold mineralization is dominantly hosted within shear zone structures associated with splays off the regional Klob Lake fault structure. Several shear hosted high grade gold mineralization occurrences are on the Property, out of which most important are the Titan and Tomorrow Lake showings. The Titan showing was discovered by Goldstream in the fall of 2011. Here, the highly deformed and quartz veined volcanic/gabbro rocks contain visible gold with initial grab samples returning gold assays of 11,200 g/t Au, 5,900 g/t Au and 3,420 g/t Au. The Tomorrow Lake Showing is located proximal to the contact between mafic volcanic/gabbro rocks and a large diorite stock. During 1983 exploration work, the best results were in drill hole BO-83-34 which returned 7.91 g/t over 5.12 m.

Historical work on the Property dates back to the 1930’s when claims were staked, and later Gold Showing was discovered by L. Morrow who reportedly collected a 1,833 kg sample of sheared stock -worked volcanic rocks from a pit returned 31.73 g/t Au (AFRI #42F13SW0011). L. Morrow in 1958 intersected a mineralized zone 5ft wide averaging 0.17

oz/t Au (5.3 g/t) over 1.5m (AFRI #42F13SW0036). The same structure was again tested by Getty Resources in 1986 which intersected mineralized tuffaceous units returning wide low grade results with several narrow high grade intercepts (e.g. 75.6 g/t Au over 0.5m and 20.2 g/t Au over 0.5m). Of most significance is that these high grade intercepts were located within a highly carbonate altered chalcopyrite(3%)-pyrrhotite(5%) portion at the end of the hole with a final assay of 223.5-224m (EOH) returning 0.24 oz/t Au (7.5 g/t over 0.5m). A total of around seventy-two (72) holes totaling 5,666 m were drilled between 1958 and 2004 on the Property.

During 2011-12, Prodigy Gold / Goldstream Exploration Limited completed an exploration program comprising of trenching, nine-holes with 2021 m diamond drilling, assays, ground geophysics, mapping, stripping, and sampling at Titan Showing Area. The gold mineralization was traced for 200 m along strike. Visible gold is associated with strongly deformed quartz veins within sheared, fine grained, mafic volcanic or gabbro at Goldstream's newly defined "Morrow Lake Deformation Zone (MLDZ)". The showing represents a multiple vein system with at least 4 veins carrying gold. High gold grades were received from the channel sampling program. The quartz veins are smoky grey to white and often display an orange colour due to oxide staining. The Titan Trench zone is located at the site of a fault-bounded fold hinge roughly 300 m north of the regional Klob Lake Fault. Visible coarse- and fine-grained gold is found within multiple granular grey-white quartz veins (pyrite ± minor calcite) in trenches of the main showing and along hairline fractures in drill core. In some veins galena, and possibly molybdenite and malachite have been observed. These veins, hosted within gabbro, have been tightly folded about hinge axis striking on average 120 to 160 degrees. Host rocks are strongly sheared, silicified and locally carbonatized. Thirty seven of the 134 channel samples taken at the three Titan trenches assayed for gold over 0.5 g/t, 9 samples over 10 g/t. The highest assay values obtained from the channel samples was 31.1 g Au/t and 10.7 g Ag/t over 0.4 m. Only one sample, from the Titan showing, returned anomalous molybdenum, of 1,380 ppm in a sample with low gold, 0.2 g Au/t.

The best intersections from the 2012 drilling at Titan Showing include 11.16 g Au/t over a core length of 3.0 m from 122.9 m to 125.9 m, in drill hole KL 12-01, including 61.80 g Au/t over 0.5 (from 125.4 m to 125.9 m) and a second zone of 2.95 g Au/t over core length of 4.0 m from 195.3 m to 199.3 m including 7.38 g/t over 0.5 m (from 195.3 m to 195.8 m) and 7.60 g/t over 0.6 m (from 197.5 m to 198.1 m) all hosted in sheared/silicified gabbro. KL-12-02b, drilled beneath KL 12-01, encountered 2.22 g Au/t over 1.3 m from 254.3-254.7 m. Drill hole KL-120-08 approximately 80 m to the east encountered 43.78 g Au/t over 2.5 m from 48.0-50.5 m including visible gold over a 0.4 m section from 49.4-49.8 m assaying 271.00 g Au/t.

Alex Pleson, the Property Vendor, carried out exploration work on the Property from November 2016 to May 2020 which included prospecting, geological mapping, trenching, channel sampling, ground geophysical surveys and assaying. During this work, a total of 27 samples were taken and 14-line kilometers area was mapped. Additionally, a total area of 200 square meter was excavated through trenching to expose bedrock and 5 kilometers of trail were made to improve access to the Property using a D5 Cat Dozer and an excavator

Kubota KX040. Total cost of exploration work from September 2019 to May 2020 was \$82,500.

The results of 2016 channel sampling indicated gold values in the range of 0.011 g/t to 51.1 g/t (1.8 ounces per ton). One channel sample came back with 5.37 g/t gold over one-meter length. The results of prospecting and geological work sampling of 2019-20 work indicated lower values of gold with only one sample indicated 2.84 g/t.

A VLF and ground magnetic survey was completed on the Iron Grid from January 5-15, 2020 with a total 14 line-km at 50m line spacing and 25m stations. Similarly, a second magnetic / VLF was completed on the Morrow Grid from May 1-10, 2020 with a total 14 line-km at 50m line spacing and 25m stations. The results of survey have shown that the mineralization trend which was explored at Morrow Lake through drilling and trenching can further extend to the east along strike for approximately two kilometres. It is recommended to fill the gap in survey grids to get a complete picture of the area and see the continuity of structures.

Soldera has not carried out any exploration work on the Property.

Mineralization style for the Property suggests that gold mineralization is dominantly hosted within shear zone structures associated which splay off the regional Klob Lake fault structure. One prominent characteristic of all significant gold deposits in the Superior Province is their occurrence within or immediately adjacent to greenstone belts. The faults, and associated splays, which control gold mineralization, are typically part of a larger deformational zone that can reach kilometers in thickness and several hundred kilometers in strike. There are three types of gold mineralization identified in the area: (a) in quartz veins hosted in volcanic rocks and felsic dikes within shear zones, (b) in narrow semi-massive sulphide bands filling fissures, and (c) in altered rocks within shear zones with or without quartz veins.

The author visited the property on May 23, 2020. A total of six samples were collected by the author from historical channel sampling and other exploration areas. All samples were under the care and control of the author. The samples were submitted to Polymet Labs in Cobalt, Ontario for sample preparation and analyses. The samples were assayed using Fire Assay package for gold and silver (50 g, Fire assay, AAS finish). The sample assay results indicated gold (Au) values in the range of 0.057 grams per ton (g/t) to 4.03 g/t while one sample (31523) was below laboratories detection limits (0.028 g/t). Highest Silver values of 26.31 were in sample 31518 and the lowest 1.3 g/t was sample 31523 while four samples were below the laboratories detection limits.

The data presented in this report is based on published assessment reports available from Soldera, Ontario ENDM (Ministry of Energy, Northern Development and Mines), the Geological Survey of Canada, and the Ontario Geological Survey. All the consulted data sources are deemed reliable. The data collected during present study is considered sufficient to provide an opinion about the merit of the Property as a viable exploration target.

Based on its favourable geological setting indicating shear hosted gold mineralization in trenches, drill holes, geophysical survey data and findings of present study, it is concluded that the Property is a property of merit, with good potential for discovery of economic concentration of gold mineralization through further exploration. Good road access, availability of exploration and mining services in the vicinity makes it a worthy mineral exploration target. The historical exploration data collected on the Property provides the basis for a follow-up work program.

Recommendations

In the author's opinion, the character of the Property is sufficient to merit the following phased work program, where the second phase is contingent upon the results of the first phase.

Phase 1 – Geophysical Surveys, Prospecting, Trenching and Sampling

The historical work at the Property was mainly focussed on the main Titan and Morrow showings, however the geophysical survey data indicates a northwest southeast trending structural corridor of 1.67 to 4 kilometres in length along strike within Morrow Lake Deformation Zone (MLDZ) which can be a potential target for further exploration. The results of ground geophysical survey indicate that magnetic anomalies provide better control of finding gold mineralization for exploration. It is recommended to fill the gap in 2020 VLF survey, and continue prospecting, trenching, and sampling work along MLDZ.

Total estimated budget for Phase 1 program is \$157,630 and it will take about three months' time to complete this work.

Phase 2 – Detailed Drilling and Resource Estimation

If results from the first phase are positive, then a detailed drilling program would be warranted to check the most promising targets identified in Phase 1. The scope of work for drilling and location of drill holes would be determined based on the findings of Phase 1 investigations.

2.0 INTRODUCTION

2.1 Purpose of Report

This report was commissioned by Soldera Mining Corp. (“Soldera” or “the Company”) and Martin Ethier, P.Geol. (the “author”) was retained to prepare an independent Technical Report on the Titan Gold Property (the “Property”). The report is prepared for Soldera and its purpose is to meet the listing requirements of Soldera to the Canadian Securities Exchange (the “CSE”) and for future financing.

2.2 Sources of Information

The present report is based on published assessment reports available from the Ministry of Energy, Northern Development, Mines and Forestry (ENDM) Ontario, and published reports by the Ontario Geological Survey (OGS), the Geological Survey of Canada (“GSC”), various researchers, websites, and personal observations. All consulted sources are listed in the References section. The sources of the maps are noted on the figures.

The author carried out a visit of the Property on May 23, 2020. The scope of Property inspection was to verify historical exploration work and to take geological, infrastructure, and other technical observations on the Property. The geological work performed to verify the existing data consisted of surface grab and channel sampling and visiting reported approachable historical exploration work areas.

The author has also reviewed the land tenure on the ENDM Database. The author reserves the right but will not be obliged to revise the report and conclusions if additional information becomes known after the date of this report.

3.0 RELIANCE ON OTHER EXPERTS

This report is based upon personal examination by the author and review of available reports on the Property. The author visited the Property May 23, 2020, to appraise the geological environment, to verify historical exploration work and assess the potential of the Property for discovery of gold and other metals.

The information, opinions and conclusions contained herein are based on:

- Information available to the author at the time of preparation of this report;
- Assumptions, conditions, and qualifications as set forth in this report; and,
- Data, reports, and other information supplied by Soldera and other third-party sources.

For the purpose of the report the author has reviewed and relied on ownership and the Option Agreement information provided by Soldera, which to the author’s knowledge is correct. A limited search of tenure data on the ENDM Ontario website on May 12, 2020,

conforms to the data supplied by Soldera. However, the limited research by the author does not express a legal opinion as to the ownership status of the Property. This disclaimer applies to ownership information relating to the Property.

As of the date of this report, the author is not aware of any material fact or material change with respect to the subject matter of this technical report that is not presented herein, or which the omission to disclose could make this report misleading.

4.0 PROPERTY DESCRIPTION AND LOCATION

The Property consists of 34 mining claims totalling approximately 2,312.25 hectares land in Klotz Lake / Bicknell Lake Area, Thunder Bay Mining District of Northwestern Ontario, Canada (Figure 1 and 2). It is located about 365 kilometers to the northeast of Thunder Bay. The nearest town to the property is Longlac situated 55 km west of the Property.

Pursuant to a property purchase option agreement (the "Option Agreement") between the Optionor and Soldera, dated May 07, 2020, Soldera holds an option to acquire a 100% interest in the Claims by making cash payments, common shares issuances and exploration expenditures as follows:

- I. making a \$40,000 payment in cash to the Optionor within 7 days of the signing of the Option Agreement;
- II. incurring a minimum of \$110,000 of exploration expenditures of the Property within one (1) year of the signing of the Option Agreement;
- III. making a \$40,000 payment in cash to the Optionor, and issuing 300,000 of Soldera's common shares to the Optionor on or before the first anniversary of the listing of Soldera's common shares on a Canadian stock exchange; and
- IV. making a \$60,000 payment in cash to the Optionor, issuing 600,000 of Soldera's common shares to the Optionor, and incurring a minimum of \$250,000 of exploration expenditures on the Property within two (2) years of the signing of the Option Agreement.

The Option Agreement also provides for a royalty in the Optionor's favour equal to a 2% Net Smelter Return ("NSR") on the Property. The royalty will be payable to the Optionor for as long as Soldera and/or its successors and assigns hold any interest in the Claims. Soldera will have the right to purchase from the Optionor 1% of the NSR for \$500,000, thereby reducing the NSR to 1%.

Twenty-six of the Property claims were originally staked on ground by erecting physical posts as required by earlier claim staking regulations in Ontario. As part of the process to update the provincial *Mining Act*, Ontario has launched a new online, self-service claim staking system in 2018. The new electronic *Mining Lands Administration System* (MLAS) replaces the province's century-old traditional ground staking methods. All the mining claims in Ontario, which existed prior to the modernization (legacy claims in the new parlance), have been converted to what are now known as cell claims or boundary claims.

A cell claim is a mining claim that relates to all the land included in one or more cells on the provincial grid. A boundary claim is a claim that is made up of only a part or parts of one or more cells. Due to current COVID 19 situation, Ontario Ministry of Mines has extended claims expiry dates and their status is defined as “Hold Special Circumstances Apply” on claim abstracts shown on MLAS). The remaining claims covering 1,640.25 hectares were staked in 2020 using online staking system and are active until May 2022.

The information posted on Ontario MLAS system is provided below:

“The ministry acknowledges that the COVID-19 outbreak and related public health requirements are special circumstances that have created challenges for all claim holders in Ontario. As a result, we are leveraging the tools available under the Mining Act to provide claim holders with relief through simplified exclusion orders. Claim holders with claim anniversary dates on or before December 31, 2020, will be given an exclusion order by making a brief request via email. There will be no cost for COVID-19 related exclusion requests. The exclusion orders will remove the requirement to carry out assessment work for a period of time of up to 12 months.”

All cell mining claims are subject to \$200 - \$400 per unit worth of eligible assessment work to be undertaken before their expiry date as shown in Table 1 below. Total work commitment to maintain these claims is \$44,000 per year or the other option is to pay cash in lieu.

Mining claims in Ontario do not include surface rights. The surface rights on the Property are owned by Crown where a permit is required to carry out intrusive exploration work such as line-cutting, trenching and drilling.

First Nation communities within Greenstone municipal boundaries are Long Lake 58, Lake Nipigon Ojibway, Rocky Bay and Sand Point, while Aroland and Ginoogaming First Nations are situated just outside the Municipality, adjacent to the wards of Nakina and Longlac, respectively (Source: <http://greenstone.ca/>). Any exploration and mining work on the Property will need to be carried out in consultation with these communities.

Claim data is summarized in Table 1, while a map showing the Claims is presented in Figure 2. There is no past producing mine on the Property and there were no historical mineral resource or mineral reserve estimates documented.

There are no known environmental liabilities. There is an existing exploration permit in the name of Alex Pleson, the Property Vendor which can be utilized to complete the recommended Phase 1 exploration work until the claims are transferred to Soldera after completion of the Option payments.

Table 1: List of Property Claims

Tenure ID	Legacy Claim Id	Township / Area	Tenure Type	Status	Expiry Date	Tenure Ownership Percentage	Work Required
531420		KLOTZ LAKE AREA	Multi-cell Mining Claim	Active	2019-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$4,800
306866	4266307, 4280705	KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$400
282839	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
205825	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
186339	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
186338	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
178908	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
178907	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
133696	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
108740	4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2019-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
313572	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
306870	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
306869	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
306868	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
306867	4266307	KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$400
247018	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
239541	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
239540	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
209650	4266307	KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$400
209648	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
190843	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
144839	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
126828	4266307	KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$400
126827	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
107240	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
107238	4266307	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-01-15 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
294685	4266307, 4280705	KLOTZ LAKE AREA	Boundary Cell Mining Claim	Active	2020-06-01 (Hold Special Circumstances Apply)	Alexander Pleson (100%)	\$200
536341		KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2020-12-12	Alexander Pleson (100%)	\$400
536340		KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2020-12-12	Alexander Pleson (100%)	\$400
550991		KLOTZ LAKE AREA	Single Cell Mining Claim	Active	2021-06-04	Alexander Pleson (100%)	\$400
587415		BICKNELL LAKE AREA, KLOTZ LAKE AREA	Multi-cell Mining Claim	Active	2022-05-05	Alexander Pleson (100%)	10000
587414		BICKNELL LAKE AREA	Multi-cell Mining Claim	Active	2022-05-05	Alexander Pleson (100%)	6800
587413		BICKNELL LAKE AREA, KLOTZ LAKE AREA	Multi-cell Mining Claim	Active	2022-05-05	Alexander Pleson (100%)	8400

Tenure ID	Legacy Claim Id	Township / Area	Tenure Type	Status	Expiry Date	Tenure Ownership Percentage	Work Required
587412		BICKNELL LAKE AREA, KLOTZ LAKE AREA	Multi-cell Mining Claim	Active	2022-05-05	Alexander Pleson (100%)	7200
Total		34 Cell Claims			2312.25 Hectares	Work Required	\$44,400

Figure 1: Property Location Map


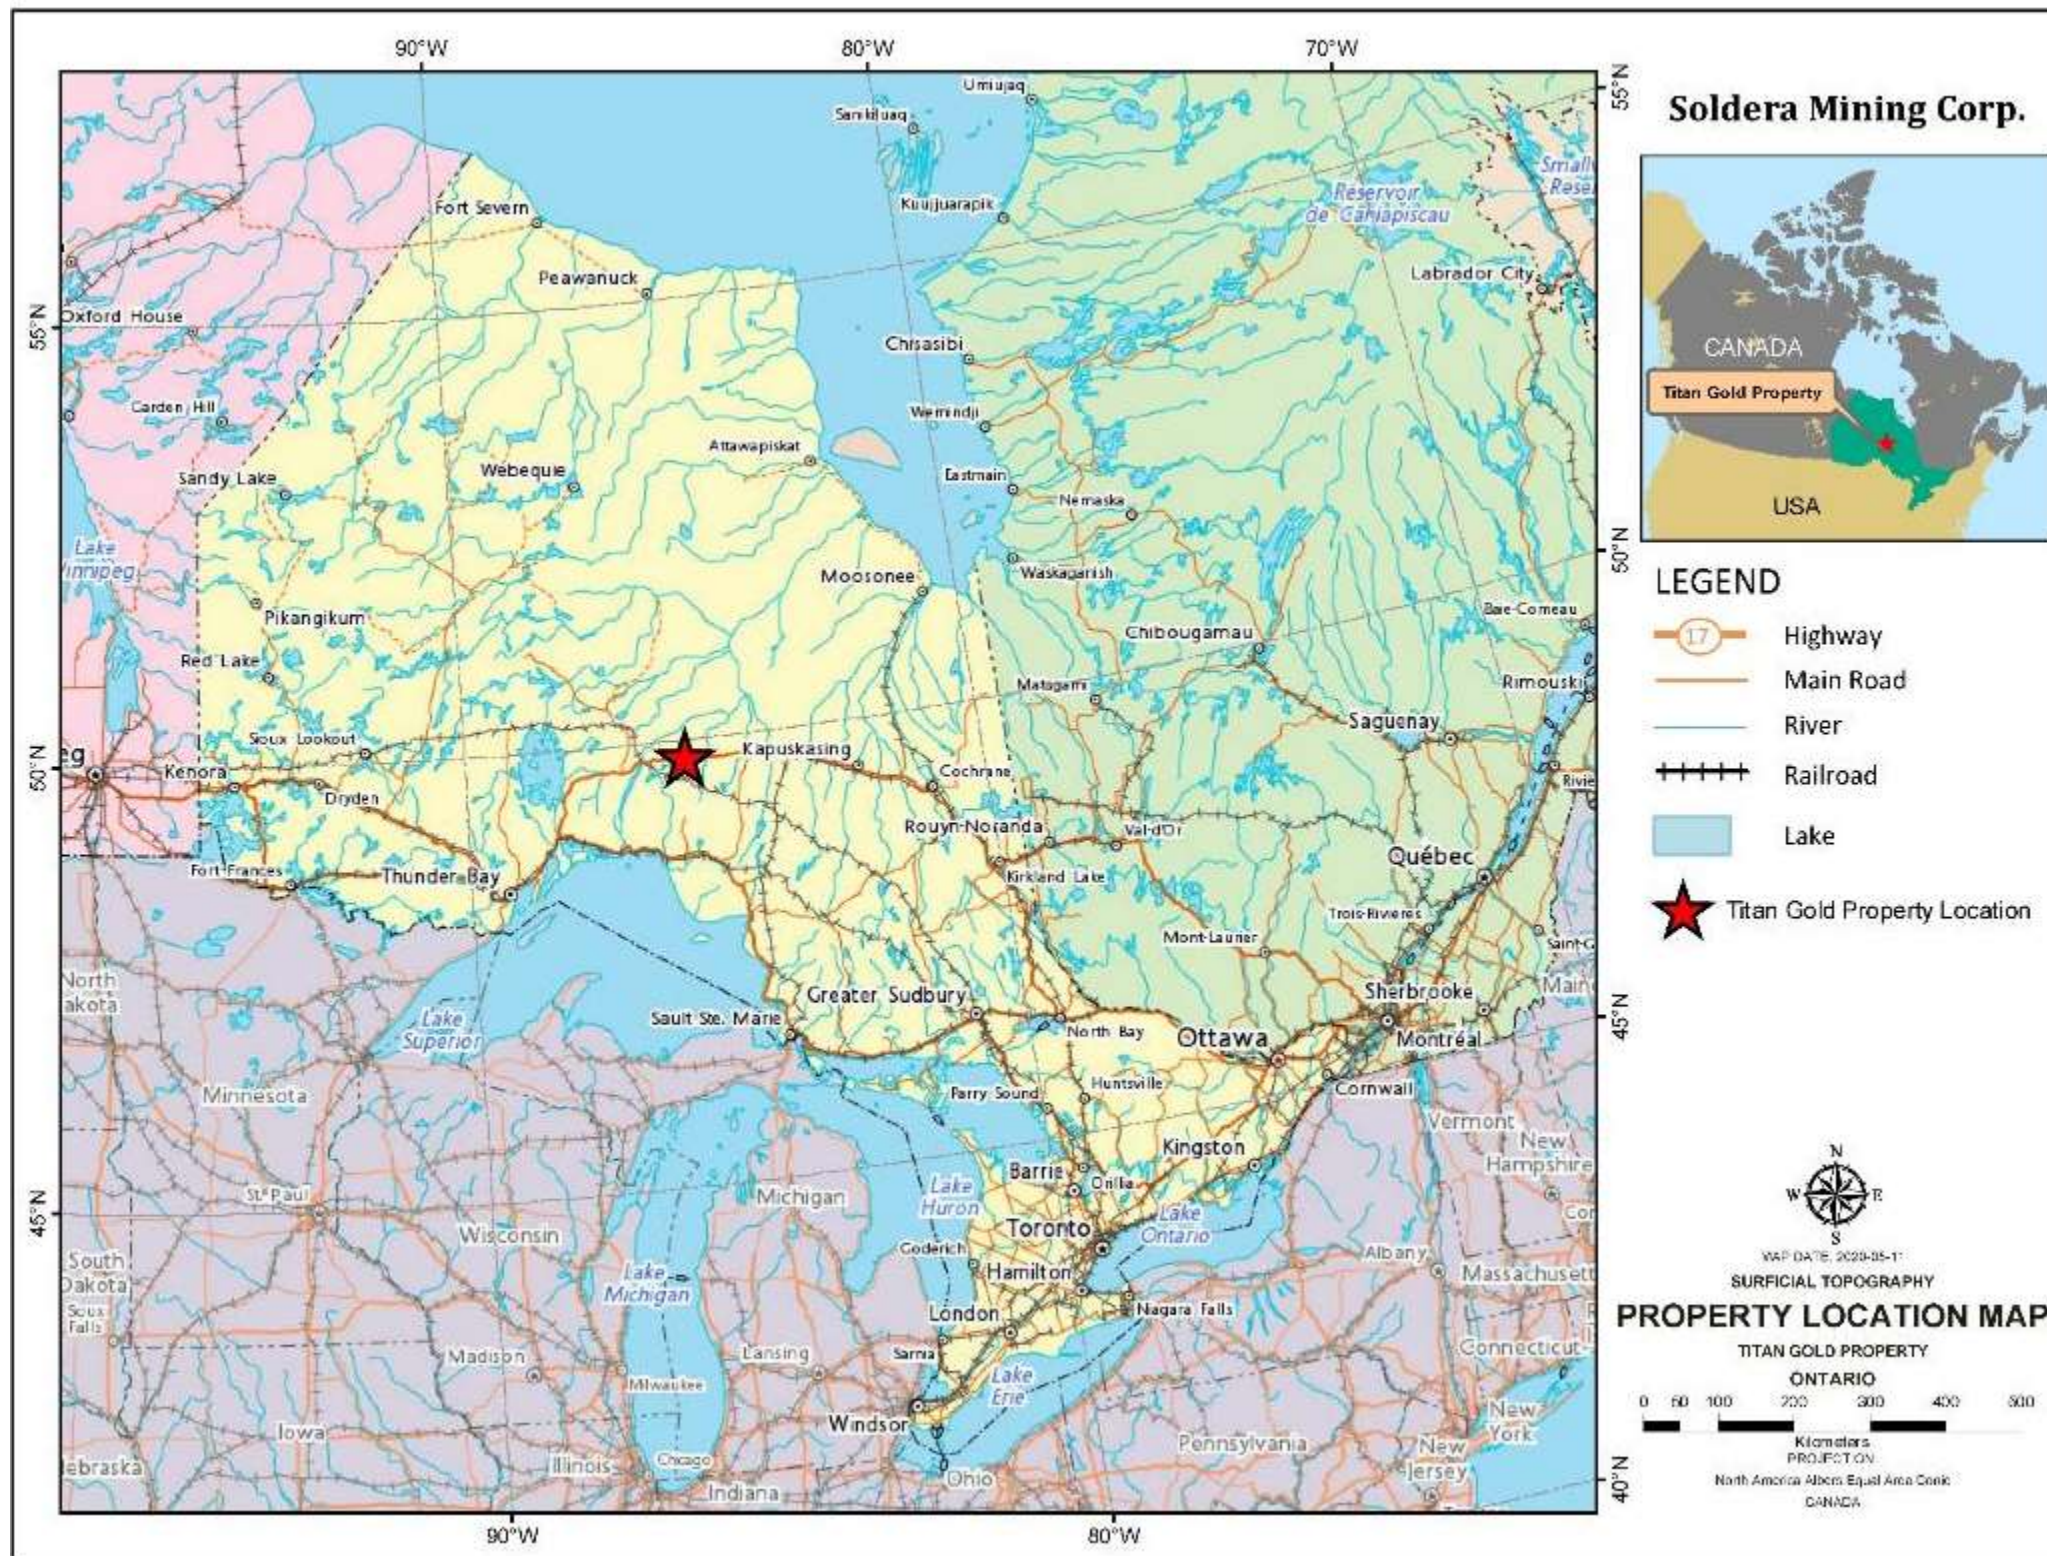


Figure 2: Claim map with physiography

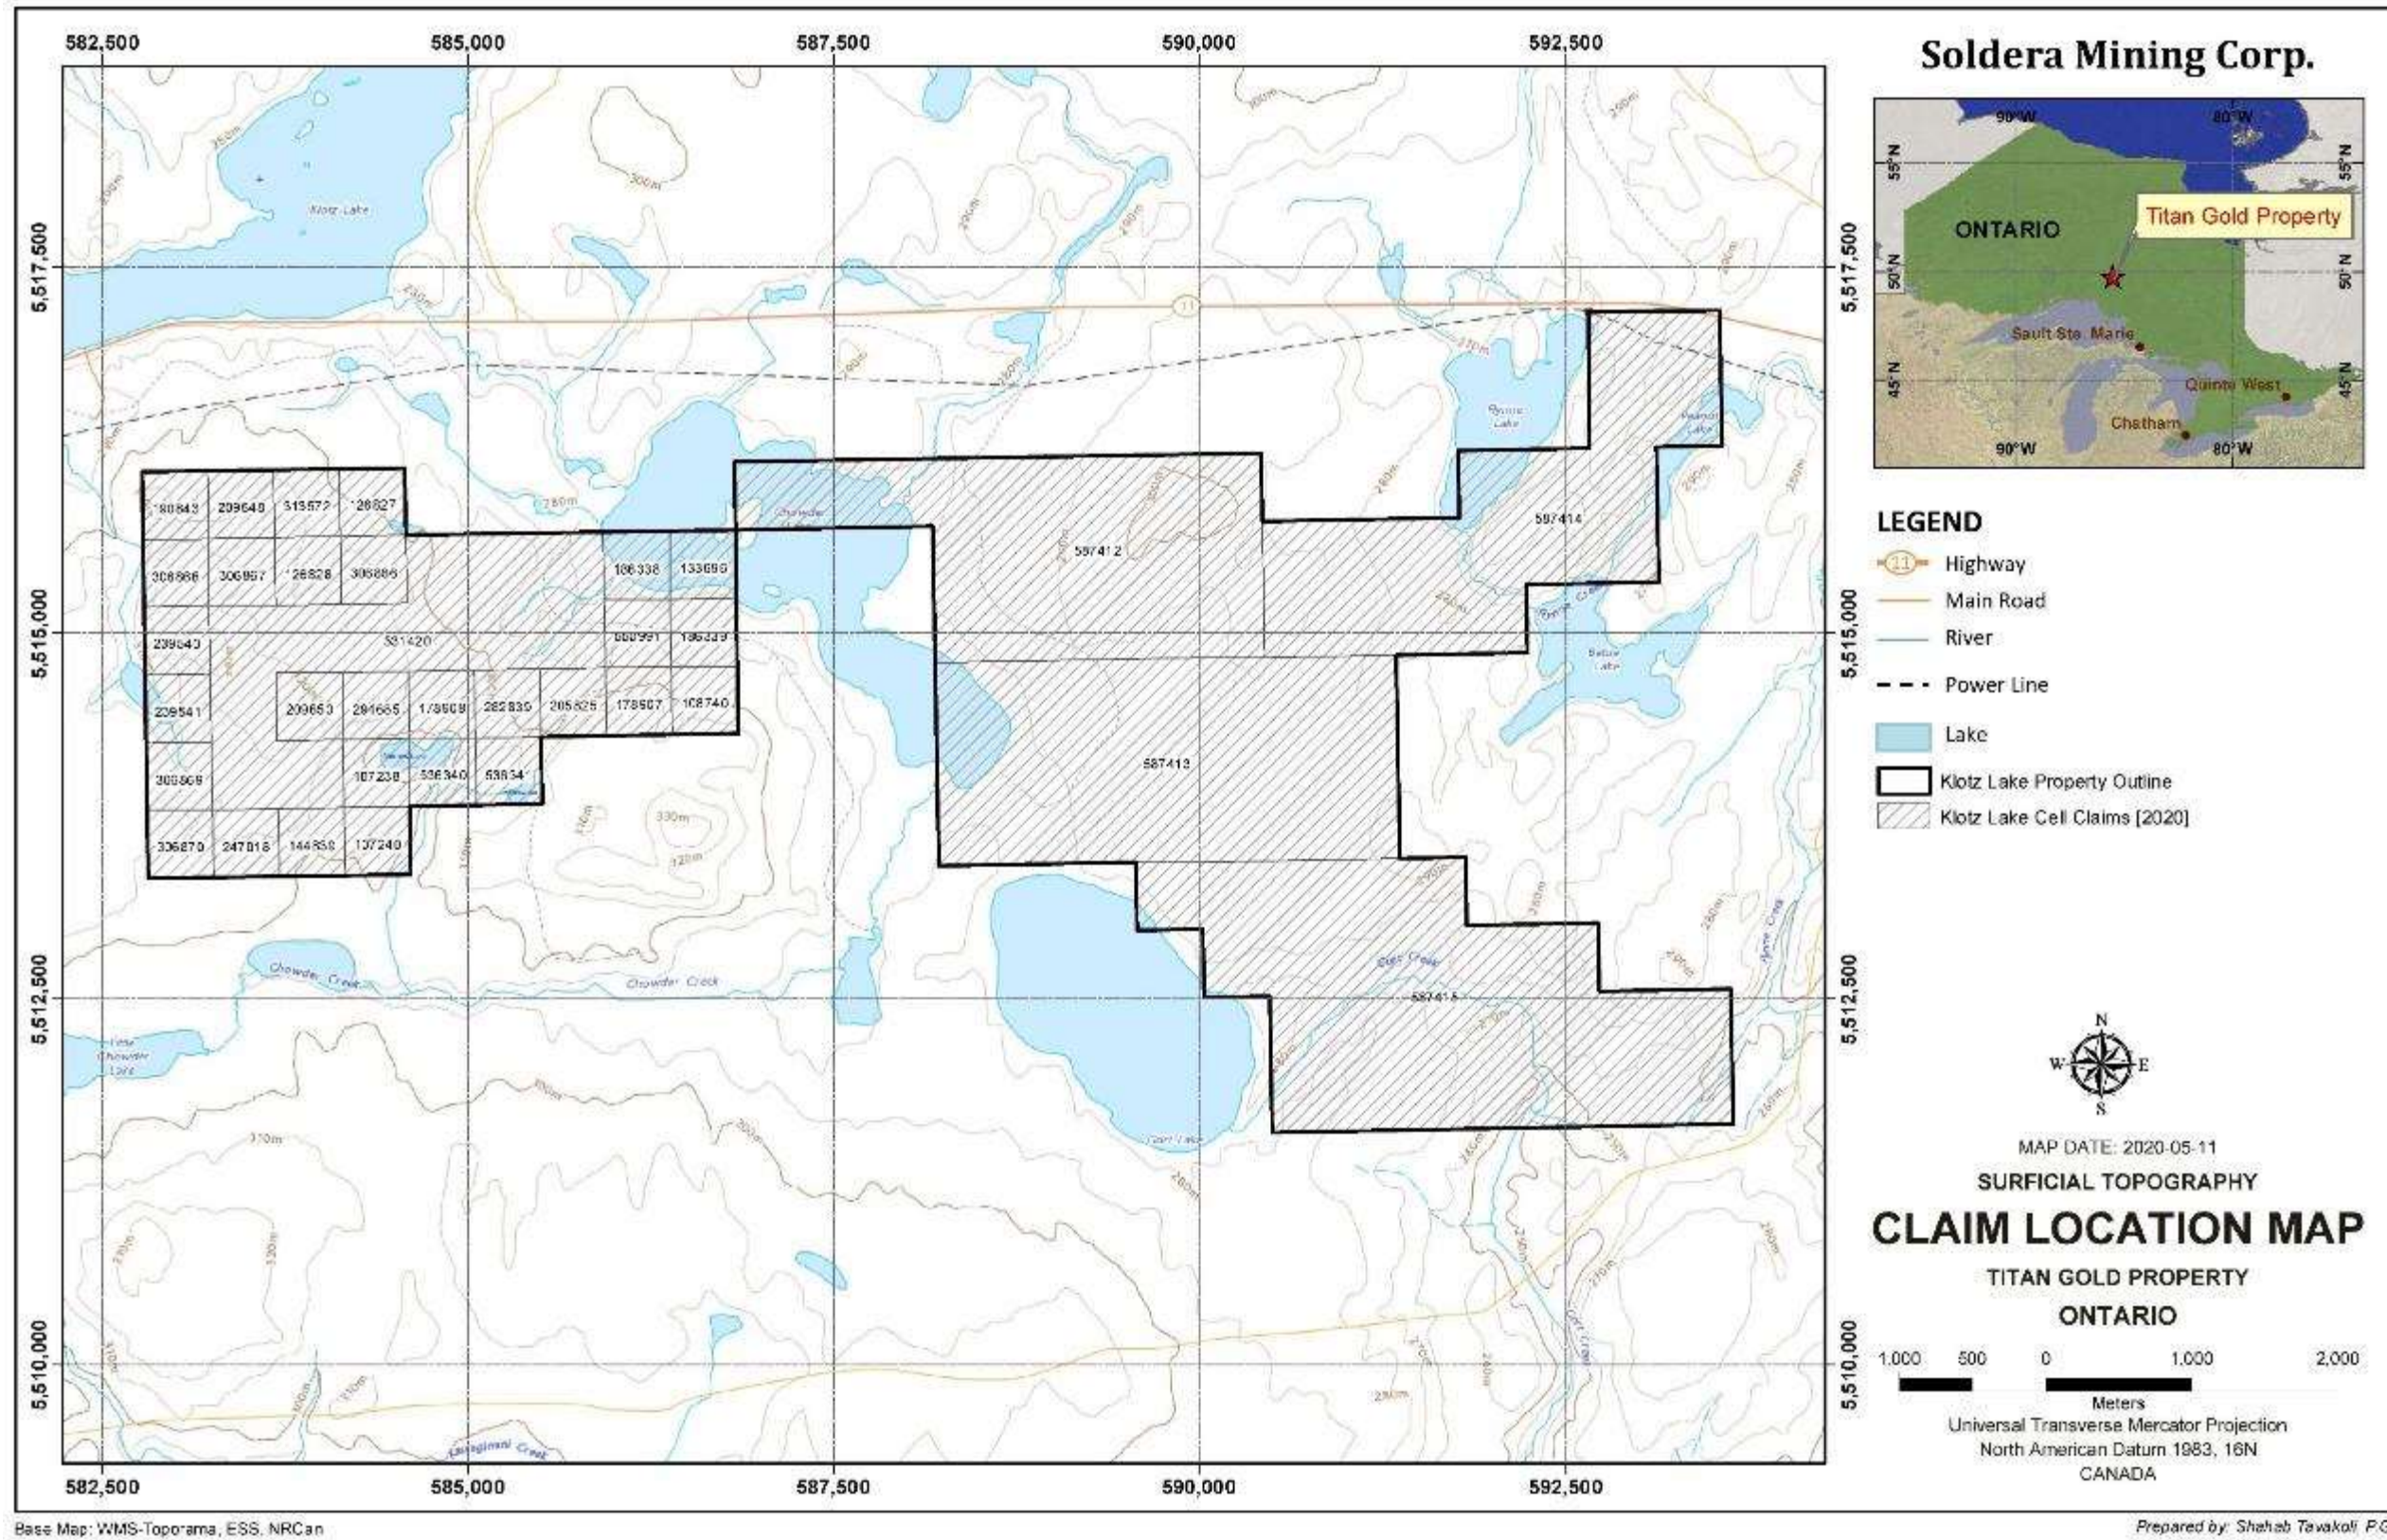

5.0 ACCESS, CLIMATE, PHYSIOGRAPHY, LOCAL RESOURCES, AND INFRASTRUCTURE

5.1 Access

The Property covers two claim blocks connected to each other along corners totaling approximately 2,312.25 hectares land, located just south of Highway 11, approximately 365 kilometres from Thunder Bay (Figures 1 and 2). The nearest town to the property is Longlac situated 55 km west of the Property. To access to the Titan gold showing and drill sites, drive on the Trans-Canada Highway 11 for approximately 55 km east of Longlac. Then turn south on the Fish Creek gravel road to Tomorrow Lake where the road ends. Onwards, historical drill roads need four-wheel drive or all-terrain vehicle (ATV) along the Northshore of Morrow Lake to the Titan Gold Showing and historical drill sites.

5.2 Climate

The climate on the Property mirrors that of Greenstone and experiences a humid continental climate with cold winters and warm summers. The highest temperature ever recorded in the area was 40°C (104.0°F) on 11 and 12 July 1936 at Longlac. The coldest temperature ever recorded was -50.2 C (-58.4 F) on 31 January 1996 (at Geraldton Airport). The warm season lasts for 3.8 months, from May 21 to September 14, with an average daily high temperature above 61°F (16°C). The hottest day of the year is generally July 24, with an average high of 74°F (23°C) and low of 54°F (12°C). The cold season lasts for 3.0 months, from December 1 to March 1, with an average daily high temperature below 23°F(-5°C). The coldest day of the year is January 28, with an average low of -9°F (-23°C) and high of 12°F (-11°C).

The rainy period of the year lasts for 7.7 months, from March 29 to November 20, with a sliding 31-day rainfall of at least 0.5 inches (1.27 cm). The most rain falls during the 31 days centered around July 3, with an average total accumulation of 3.1 inches (7.87 cm). Snowfall shown in Figure 4 is in liquid-equivalent terms. The actual depth of new snowfall is typically between 5 and 10 times the liquid-equivalent amount, assuming the ground is frozen. Colder, drier snow tends to be on the higher end of that range and warmer, wetter snow on the lower end. Greenstone experiences some seasonal variation in monthly liquid-equivalent snowfall. The snowy period of the year lasts for 7.9 months, from September 27 to May 22, with a sliding 31-day liquid-equivalent snowfall of at least 0.1 inches (0.25 cm). The most snow falls during the 31 days centered around November 23, with an average total liquid-equivalent accumulation of 0.9 inches. Exploration work such as geological mapping, prospecting, trenching, and sampling can be carried out during summer months, whereas drilling and geophysical surveying can be done throughout the year.

(Climate Data Source: <https://weatherspark.com/y/14340/Average-Weather-in-Greenstone-Canada-Year-Round#Sections-Humidity>).

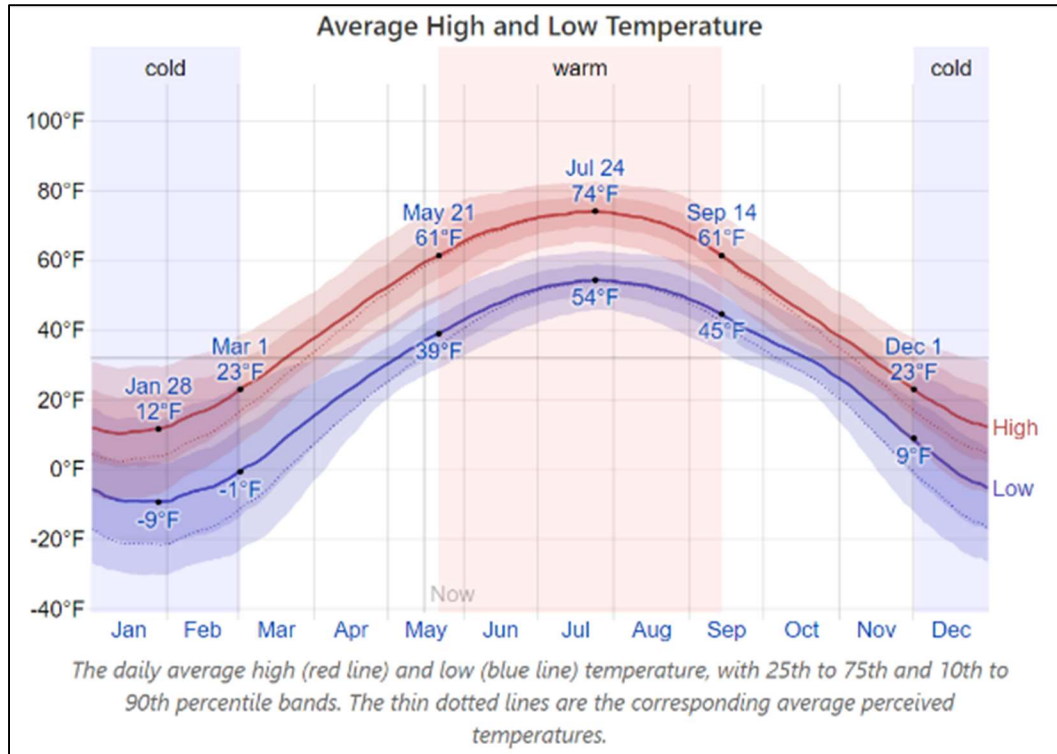


Figure 3: Greenstone Average Annual Temperatures (Source: Weatherspark.com)

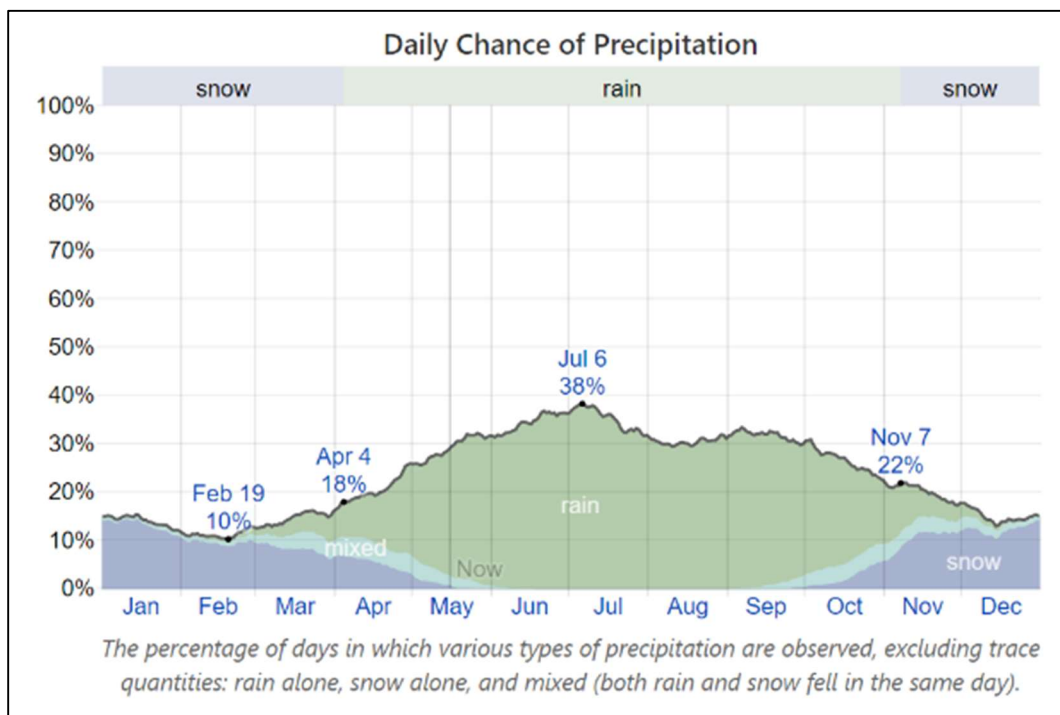


Figure 4: Greenstone Average Annual Precipitation (Source: Weatherspark.com)

5.3 Physiography

Physiography of the Property (Figure 2) is typical of the Canadian Shield, with large competent outcrops surrounded by lakes and swamps. The property comprises broadly rolling surfaces of Canadian Shield bedrock that occupies most of northwestern Ontario and which is either exposed at surface or shallowly covered with Quaternary glacial deposits. Late Wisconsinan glacial deposits cover the Property area and the physiography of the Klotz Lake region is defined by glacial activity. The elevation changes are gradual with glacial lakes, muskeg and marshes surrounded by hills, moraines, and ridges of glaciofluvial material and till. Glacial material is typically unsorted sand, silt, and gravel. The height of the land in the Titan property varies between 260 m to 290 m above sea level (Figure 2). Some small sand eskers define the topography to the northeast of the area where the 2012 drilling was focused. Large outcrops of mafic volcanic rocks also create topographic highs and hills locally. Small creeks exist throughout the region and drain into Morrow Lake. Sharp fault valleys and cliffs have been observed in the Titan showing area. Faulting appears to affect the outcrop exposure and distribution in the area which is a mixture of large expansive outcrops and low-lying swamps. The glacial overburden where the drilling was undertaken is typically between one and five metres thick.

Mature coniferous forests cover most of the property, with sporadic young regeneration of deciduous trees due to past logging operations. The Property area is covered by boreal forest with the dominant species being Jack pine and Black Spruce. Willow shrubs and grasses dominate the low marshy areas. The land surface within the area varies somewhat from the region in that there is considerable relief between the lakes in most areas and the ground surface.

5.4 Local Resources and Infrastructure

The nearest town to the property is Longlac situated 55 km west of the Property. Longlac is part of the Municipality of Greenstone which was created on January 1, 2001 by the amalgamation of the former municipalities of the Town of Geraldton, Town of Longlac, the Township of Nakina and the Township of Beardmore, and an extensive area of unincorporated territory including numerous settlement areas such as; Caramat, Jellicoe and MacDiarmid (Source: <http://greenstone.ca/>). Geraldton is the largest populated town in the region located 30 km west of Longlac and has an airport, hospital, retail, and banking facilities.

The Property has good road access, located just south of Highway 11. Canadian National Railway (CN Rail) has a northeastern corridor connecting Longlac with Toronto, Thunder Bay and Winnipeg. A high-tension powerline runs along highway 11 just north of the Property. Natural gas is also connected to Longlac. There are several lakes, rivers, and creeks in and around the Property area which can be a source of water for exploration work. The Property size is good enough for future exploration and mining operations.

The Greenstone Regional Airport, owned and operated by the Corporation of the Municipality of Greenstone, is located at Geraldton approximately 90 kilometers to the west of the Property.

Airport activity consists of movements by aircraft charters, medevac flights, and Ministry of Natural Resources fire detection and fire response aircraft. The Greenstone Regional Airport also has sea plane facilities located at Hutchison Lake, accessible from Highway 584 (at the intersection of MacOdrum Drive). (<http://www.greenstone.ca/content/airports>)

The town of Thunder Bay, located about 365 kilometres from the Property, is the largest city in Northwestern Ontario, serving as a regional commercial centre. The town is a major source of workforce, contracting services, and transportation for the forestry, pulp and paper and mining industry. Thunder Bay is a transportation hub for Canada, as the TransCanada highways 11 and 17 link eastern and western Canada. It is close to the Canada-U.S. border and highway 61 links Thunder Bay with Minnesota, United States. Thunder Bay has an international airport with daily flights to Toronto, Ontario and Winnipeg, Manitoba, and the United States. There is a large port facility on the St. Lawrence Seaway System which is a principal north-south route from the Upper Midwest to the Gulf of Mexico.

The city of Thunder Bay has most of the required supplies for exploration work including grocery stores, hardware stores, exploration equipment supply stores, restaurants, hotels, and a hospital. Many junior exploration and mining companies are based in Thunder Bay, and thus the city is a source of skilled mining labour.

6.0 HISTORY

Historical work on the Property dates back to the 1930's when the L. Morrow staked the claims, and later Gold Showing was discovered by L. Morrow who reportedly collected a 1,833 kg bulk sample of sheared stockworked volcanic rocks from a pit located at the northeast end of Tomorrow Lake in 1951. The sample reportedly returned 31.73 g/t Au (AFRI #42F13SW0011). A 15-drill hole program was completed on the Property near Morrow Lake area (Figure 5). L. Morrow in 1958 intersected a mineralized zone 5ft wide averaging 0.17 oz/t Au (5.3 g/t over 1.5m) (AFRI #42F13SW0036). The same structure was again tested by Getty Resources in 1986 which intersected mineralized tuffaceous units returning wide low grade results with several narrow high grade intercepts (e.g. 75.6 g/t Au over 0.5m and 20.2 g/t Au over 0.5m). Of most significance is that these high grade intercepts were located within a highly carbonate altered chalcopyrite(3%)-pyrrhotite(5%) portion at the end of the hole with a final assay of 223.5-224m (EOH) returning 0.24 oz/t Au (7.5 g/t over 0.5m) (Figures 5-9, Table 4). Between 1993 and 1996, Swereda has completed Beep Mat surveys over the property outlining magnetic anomalies. These areas were subsequently trenched/stripped and blasted. (Source AFRI 2-57590-10).

Table 2: Historical work summary 1958-2004

Year	Work Completed	Company	Report (AFRI) Number	Comments
1958	Diamond Drilling	L. Morrow	42F13SW0011 42F13SW0036	15 drill holes (415m), one of which was drilled on SE corner of legacy claim 4266307 (hole 7). Hole 7 reported 5.0 ft at 0.17 oz/t Au (AFRI #: 42F13SW0036)
1982	Line cutting, Ground Magnetics, prospecting	Banque-Or Inc.	42F13SW0036	5.5 miles of line cut with line separations of 100 and 400 ft, pickets at 50 ft. Total of 4.1 miles were surveyed by ground magnetics.
1985	Ground Mag-EM	Golden Tiger	42F13SW0013	Survey covers NW portion of legacy claim 4266307; 400 ft line spacing, 100 ft picket spacing.
1986	Diamond Drilling	Getty Resources Ltd.	42F13SW0012 42F13SW0031	8 drill holes (1422m), only hole KL-86-23(224m) was completed on legacy claim 4266307. Intersected wide, but low-grade mineralized lapilli tuffs and narrow high-grade carbonate altered portions (e.g. 75.6 g/t Au over 0.5m and 20.2 g/t Au over 0.5m). Hole was ended in best in mineralized portion of hole.
1993	Beep Mat Survey, Soil (20) and Rock samples (16), Trenching (600m ²)	M. Swereda	42F13SW2001, 42F13SW0003, 42F13SW0005	Soil: up to 249 ppb Au, Mo anomaly(s). Rock: anomalous Cu. Beep Mat anomalies were trenched and local shear zones uncovered (slightly elevated Au results)
1995	Hand stripping	M. Swereda	42F13SW0015	Best sample 0.09 oz/t Au, elevated Cu
1995	Beep Mat survey	S. Shields	42F13SW0011	Completed over the frozen Tomorrow Lake, outlined two anomalies.
1996	Blasting	M. Swereda	42F13SW0023	No significant Au results
2004	Drilling	Clark	42F13SW2003	Only hole KL-04-02 on claim 4266331. Anomalous results returned (i.e. 0.77 g/t over 1m)

There are two gold occurrences on the property which are summarized in Mineral Deposit Identification (MDI) Link of Ontario Ministry of Mines and Northern Development (MNDM) online database (Table 3 and Figure 5 for location).

Table 3 : Mineral showings summary provided in MDI database

Name of Showing	Titan Gold Showing - 2012, Titan Zone - 2012, Hardrock East Project – 2012	Morrow Prospect - 1958, Chowder Lake - 1958, Explorations Banque-or Inc. Property - 1983, Chowder Lake Gold Showing - 1980, Solarus Grid - 2012
Exploration History	2011-12: Prodigy Gold / Goldstream Exploration Limited – trenching, Diamond Drilling (DD) -9-2021 m, assays, ground geophysics, mapping, stripping, sampling	1937: L. Morrow and A.H. Ward - staking. 1958-62: L Morrow - DD-15-1363 ft 1980-81: Exchange Mining - ground geophysics, stripping, sampling, DD-7-1043 ft, mag and VLF surveys. 1983: Exploration Banque-Or Inc.- DD-37, ground geophysics. 1983-84: Getty Canadian Metals Ltd.- airborne geophysics, DD-21-3388m, ground geophysics, mapping, and sampling over. 1985: Golden Tiger Mining Exploration Co. Ltd. - ground geophysics, DD-8-1561 ft. 1993: J. Shields - trenching and stripping. 2011: Prodigy Gold Corporation Inc. - ground geophysics, DD. 2012: Goldstream Exploration Limited - mapping, prospecting, sampling.
Exploration Results	At Titan, the gold mineralization was traced for 200 m along strike. Visible gold is associated with strongly deformed quartz veins within sheared, fine grained, mafic volcanic or gabbro at Goldstream’s newly defined “Morrow Lake Deformation Zone”. The showing represents a multiple vein system with at least 4 veins carrying gold. High gold grades were received from the channel sampling program. The quartz veins are smoky grey to white and often display an orange colour due to oxide staining. The Titan Trench zone is located at the site of a fault-bounded fold hinge roughly 300 m north of the regional Klob Lake Fault.	03/28/2014 (A Wilson) - The best assay from the Getty drilling was 4.00 g Au/t over a core length of 1.40 m with a section of 8.65 g Au/t over 0.50 m for hole KL-84-21 that was drilled in the Five Trench Area. Drilling showed good continuity along strike of the tuff horizons which were traced for over 250 m laterally and to 60 m in vertical depth. Tight folding has locally deformed the tuffs. Copper and gold values (minor molybdenum) were noted in diamond-drill logs of Exploration Banque-Or Incorporated and Exchange Mine Holdings Limited. 12/31/1996 (B Nelson) - A mineralized zone 200 m x 6 m x 150 m (deep) was defined by Getty Minerals. Assays up to 2.34 oz/ton Au over 10 feet were realized by Exchange Mining.
Mineralization Comments	03/29/2014 (A Wilson) - Grab samples collected from the Titan Zone returned values of 1.59, 1.21, and 0.96 oz/t Au. The Titan showing returned grab sample values of up to 11,200 g/t. The best intersections from the 2012 drilling include 11.16 g Au/t over a core length of 3.0 m from 122.9 m to 125.9 m, in drill	12/31/1996 (B Nelson) - Gold is associated with a silicified and sheared zone displaying potassium and epidote alteration. In contact with the shear zone is a foliated mafic tuff hosting pyrite, pyrrhotite and extensive biotite (an alteration product).

	<p>hole KL 12-01, including 61.80 g Au/t over 0.5 (from 125.4 m to 125.9 m) and a second zone of 2.95 g Au/t over core length of 4.0 m from 195.3 m to 199.3 m including 7.38 g/t over 0.5 m (from 195.3 m to 195.8 m) and 7.60 g/t over 0.6 m (from 197.5 m to 198.1 m) all hosted in sheared/silicified gabbro. KL-12-02b, drilled beneath KL 12-01, encountered 2.22 g Au/t over 1.3 m from 254.3-254.7 m. Drill hole KL-120-08 approximately 80 m to the east encountered 43.78 g Au/t over 2.5 m from 48.0-50.5 m including visible gold over a 0.4 m section from 49.4-49.8 m assaying 271.00 g Au/t. Visible coarse and fine grained gold is found within multiple granular grey-white quartz veins (pyrite ± minor calcite) in trench A and trench C of the main showing and along hairline fractures in drill core. In some veins galena, and possibly molybdenite and malachite have been observed. These veins, hosted within gabbro, have been tightly folded about hinge axis striking on average 120 to 160 degrees. Host rocks are strongly sheared, silicified and locally carbonatized. Thirty seven of the 134 channel samples taken at the three Titan trenches assayed over 0.5 g/t, 9 samples >10 g Au/t. The highest assay values obtained from the channel samples was 31.1 g Au/t and 10.7 g Ag/t over 0.4 m Only one sample, from the Titan showing, returned anomalous molybdenum, of 1,380 ppm in a sample with low gold, 0.2 g Au/t.</p>	
--	---	--

A total of around seventy-two (72) holes totaling 5,666 m were drilled between 1958 and 2004 on the Property. The more interesting historic drill intersections for gold are presented in Table 4 and locations are shown on Figures 6-10. As several of historical drill holes are not located on the Property, large scale maps are shown on Figures 6-9, and Figure 9 shows location and ID of drill holes majority of which are not on the Property.

A majority of these holes tested gold mineralization hosted within sheared and quartz stockwork mineralized volcanic/gabbro intrusive, amphibolite and sheared diorite rocks in contact with or in close proximity to a large diorite intrusive body or stock. Visible gold was observed in drill core on occasion. Overall, most of the drilling tested gold mineralization to a vertical depth of 50 m with some holes penetrating to around the 150 m depth limit (later follow-up drill programs).

Table 4: Highlights of historical drill intersections Tomorrow Lake Showing

COMPANY	HOLE No.	FROM (m)	TO (m)	LENGTH (m)	Au (g/t)
P. Martin and J. Lill (1980)	80-1	28.96	35.37	6.40	46.63
	80-2	35.06	35.98	0.91	69.60
	80-3	22.56	23.87	1.31	6.86
	80-5	10.06	14.88	4.82	4.80
Exploration Banqu-Or Inc. (1983)	BO-83-02	55.48	56.09	0.61	5.49
	BO-83-06	2.44	3.96	1.52	2.18
	BO-83-09	25.76	27.13	1.37	5.17
	BO-83-11	27.60	30.03	2.43	3.64
	BO-83-12	37.65	42.31	4.66	3.33
	BO-83-13	41.92	43.45	1.53	4.97
	BO-83-16	35.97	41.15	5.18	3.53
	BO-83-18	40.55	42.99	2.44	3.38
	BO-83-20	36.13	36.62	0.49	2.23
	BO-83-21	34.76	36.28	1.52	3.33
	BO-83-23	17.20	22.47	5.27	3.50
	BO-83-24	47.71	51.52	3.81	2.91
	BO-83-26	14.76	16.37	1.61	2.14
	BO-83-27	9.63	14.24	4.60	2.26
	BO-83-29	33.84	34.45	0.61	5.14
	BO-83-33	51.77	66.04	14.27	2.73
	BO-83-34	69.30	74.42	5.12	7.91
Getty Mines Limited (1983)	KL-83-01	26.50	28.00	1.50	2.83
	KL-83-03	106.90	107.90	1.00	2.73
	KL-83-09	107.50	113.00	5.50	3.52
	KL-83-10	144.50	151.00	6.50	2.28

(Source: 20013940 Goldstream Drilling Assessment Report 2012. Highlighted drill holes are not on the Titan Property)

Figure 5: Location of Mineral Showings and Historical Drill Holes

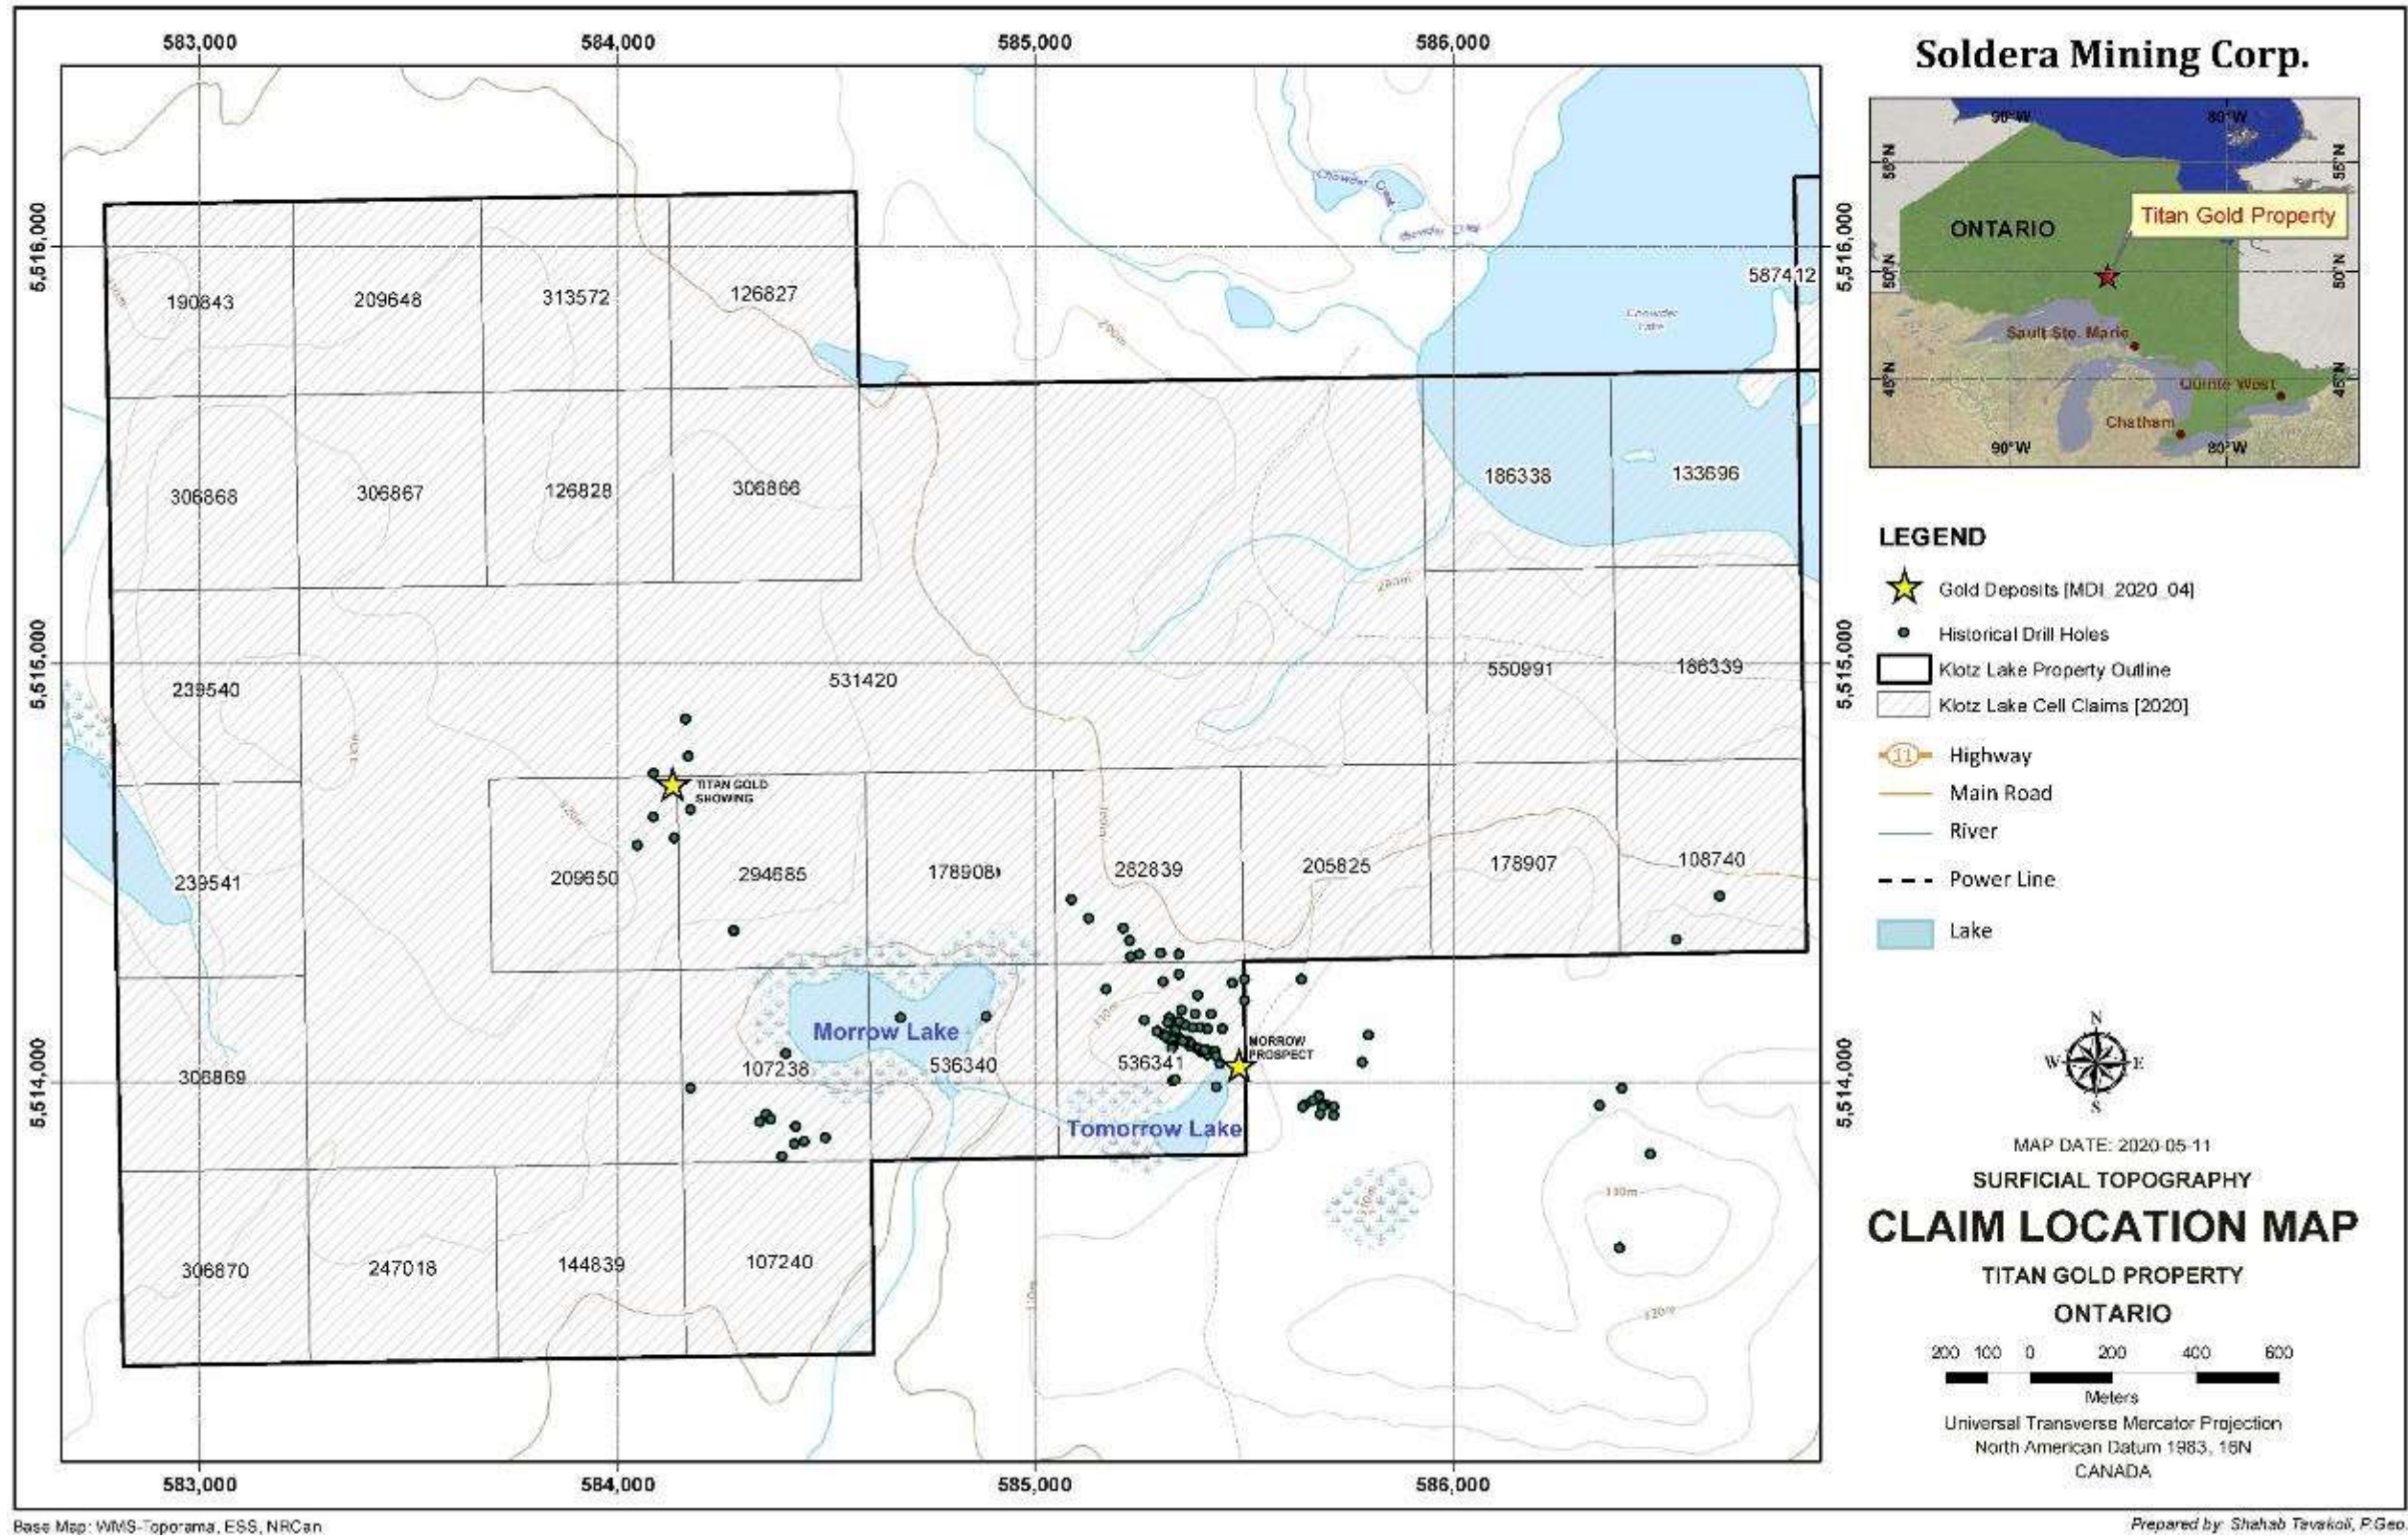


Figure 6: Historical drill hole detailed map A

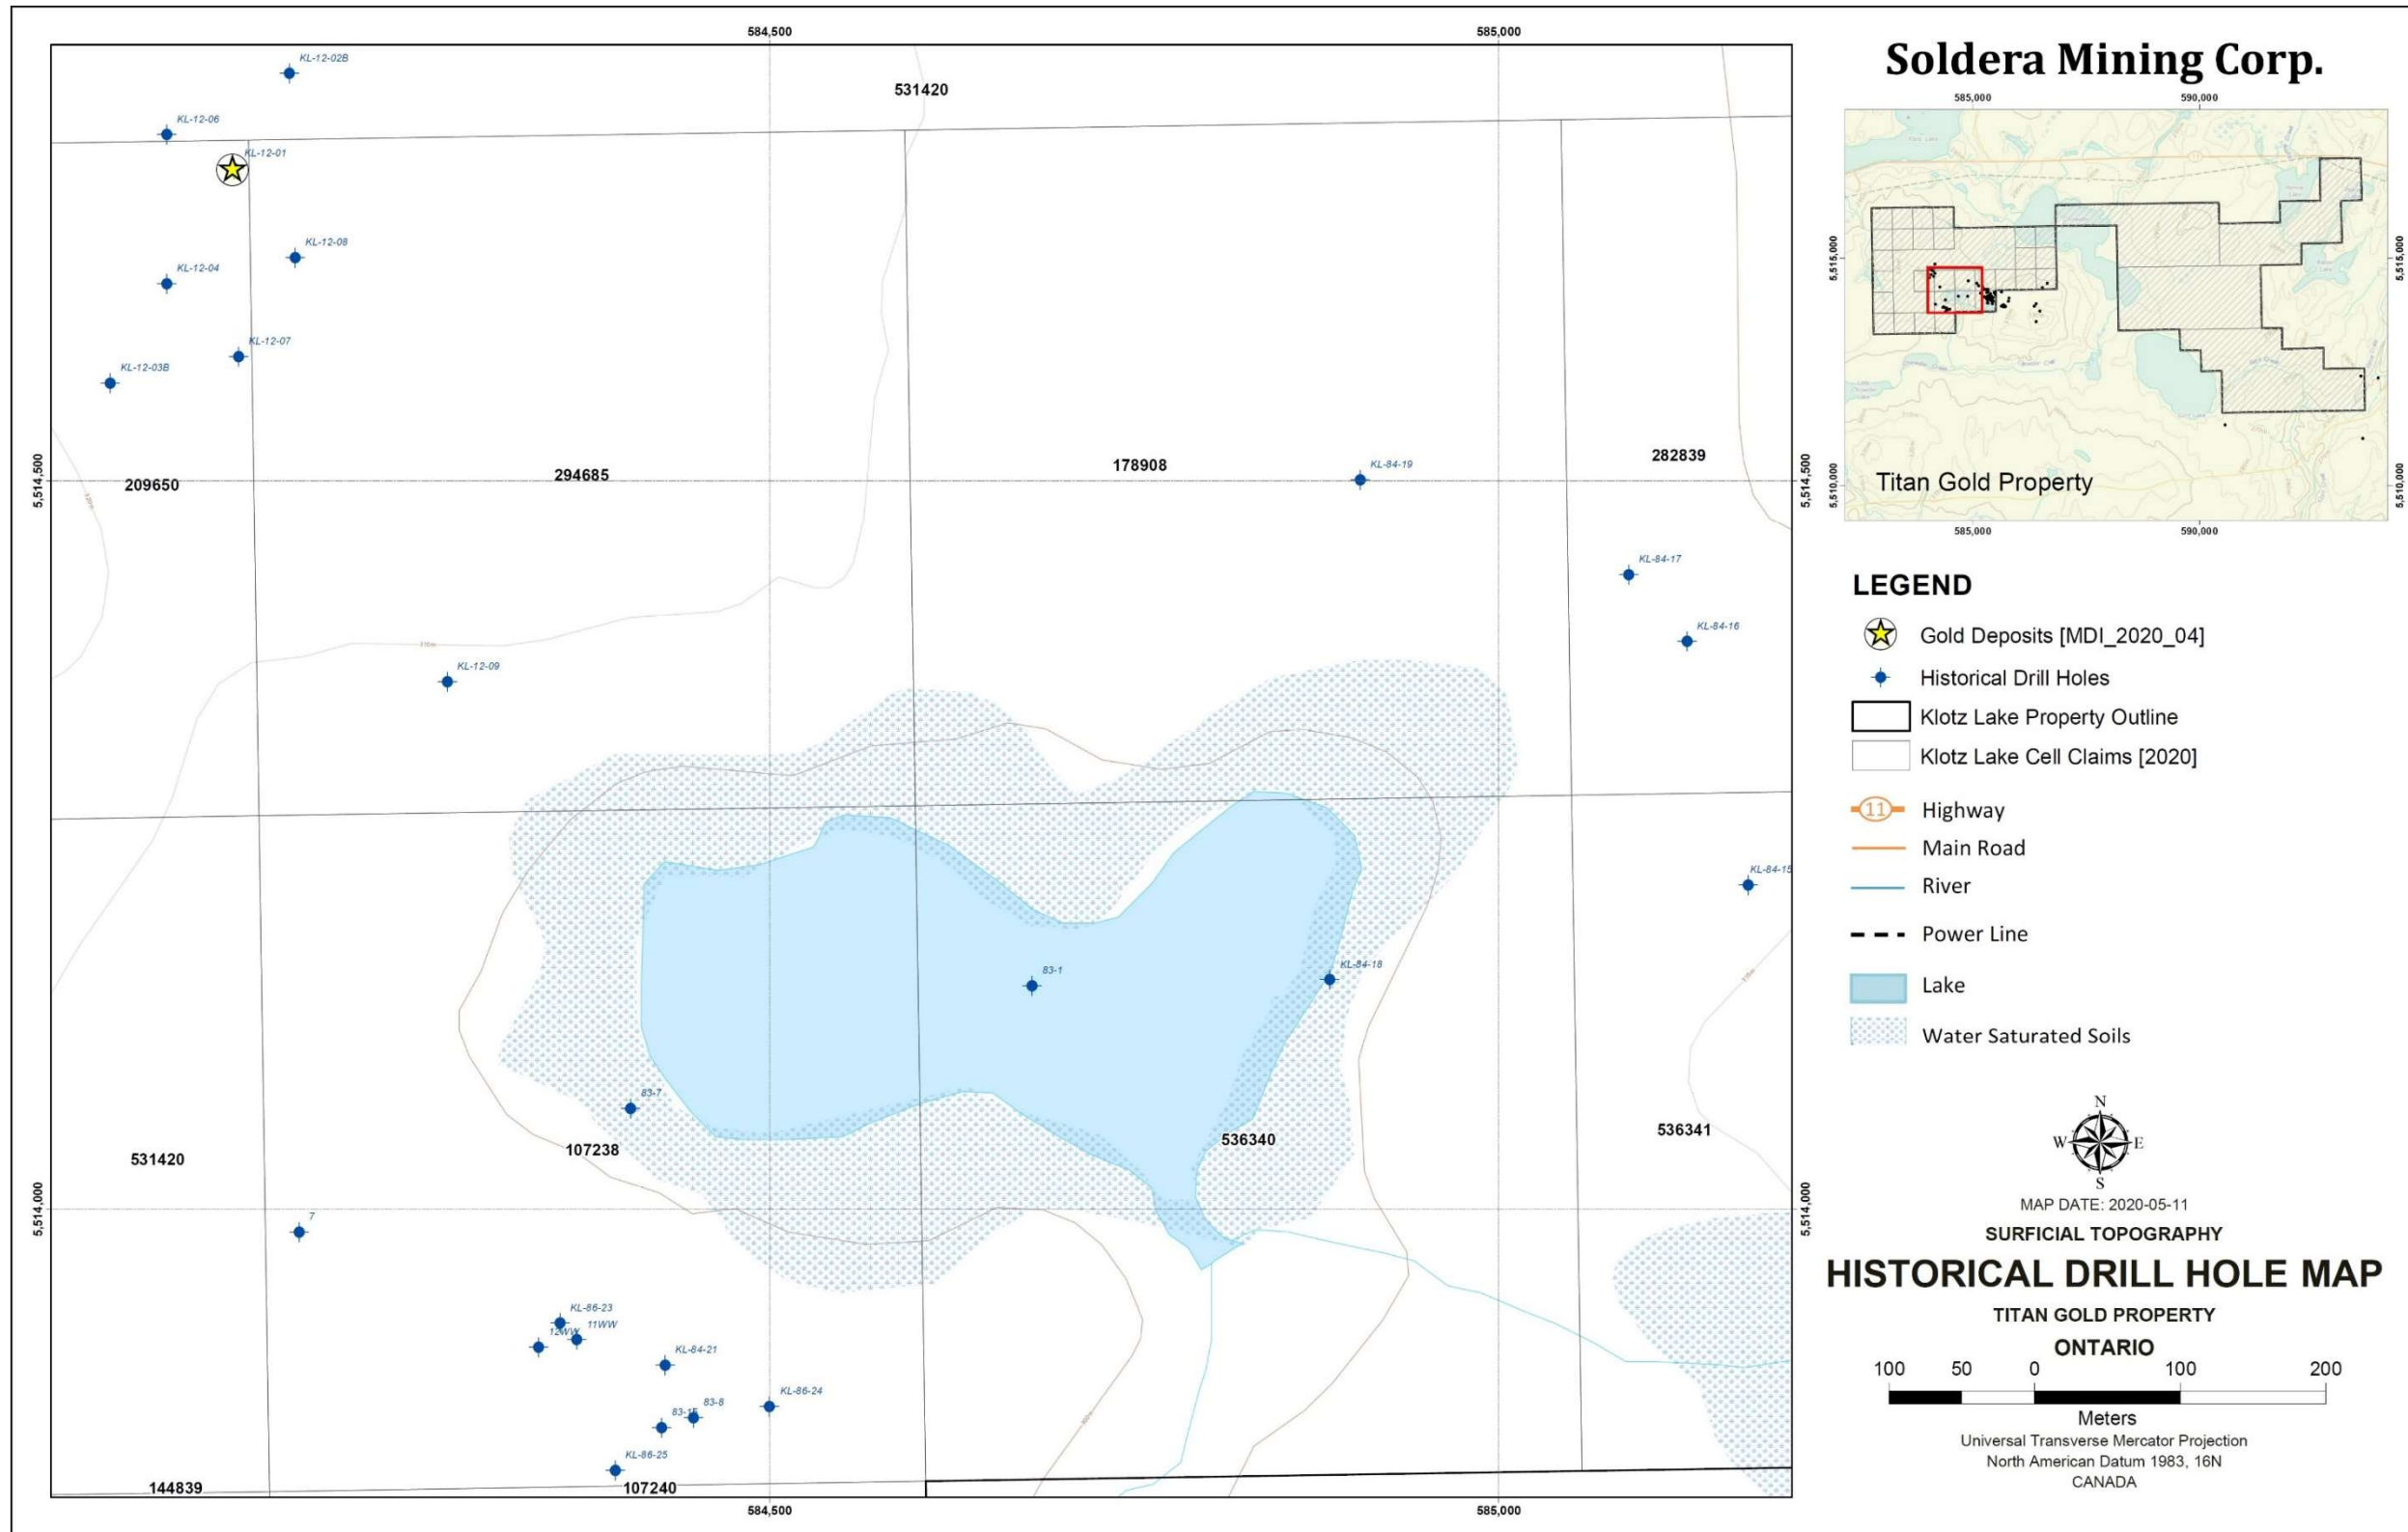


Figure 7: Historical drill hole detailed map B

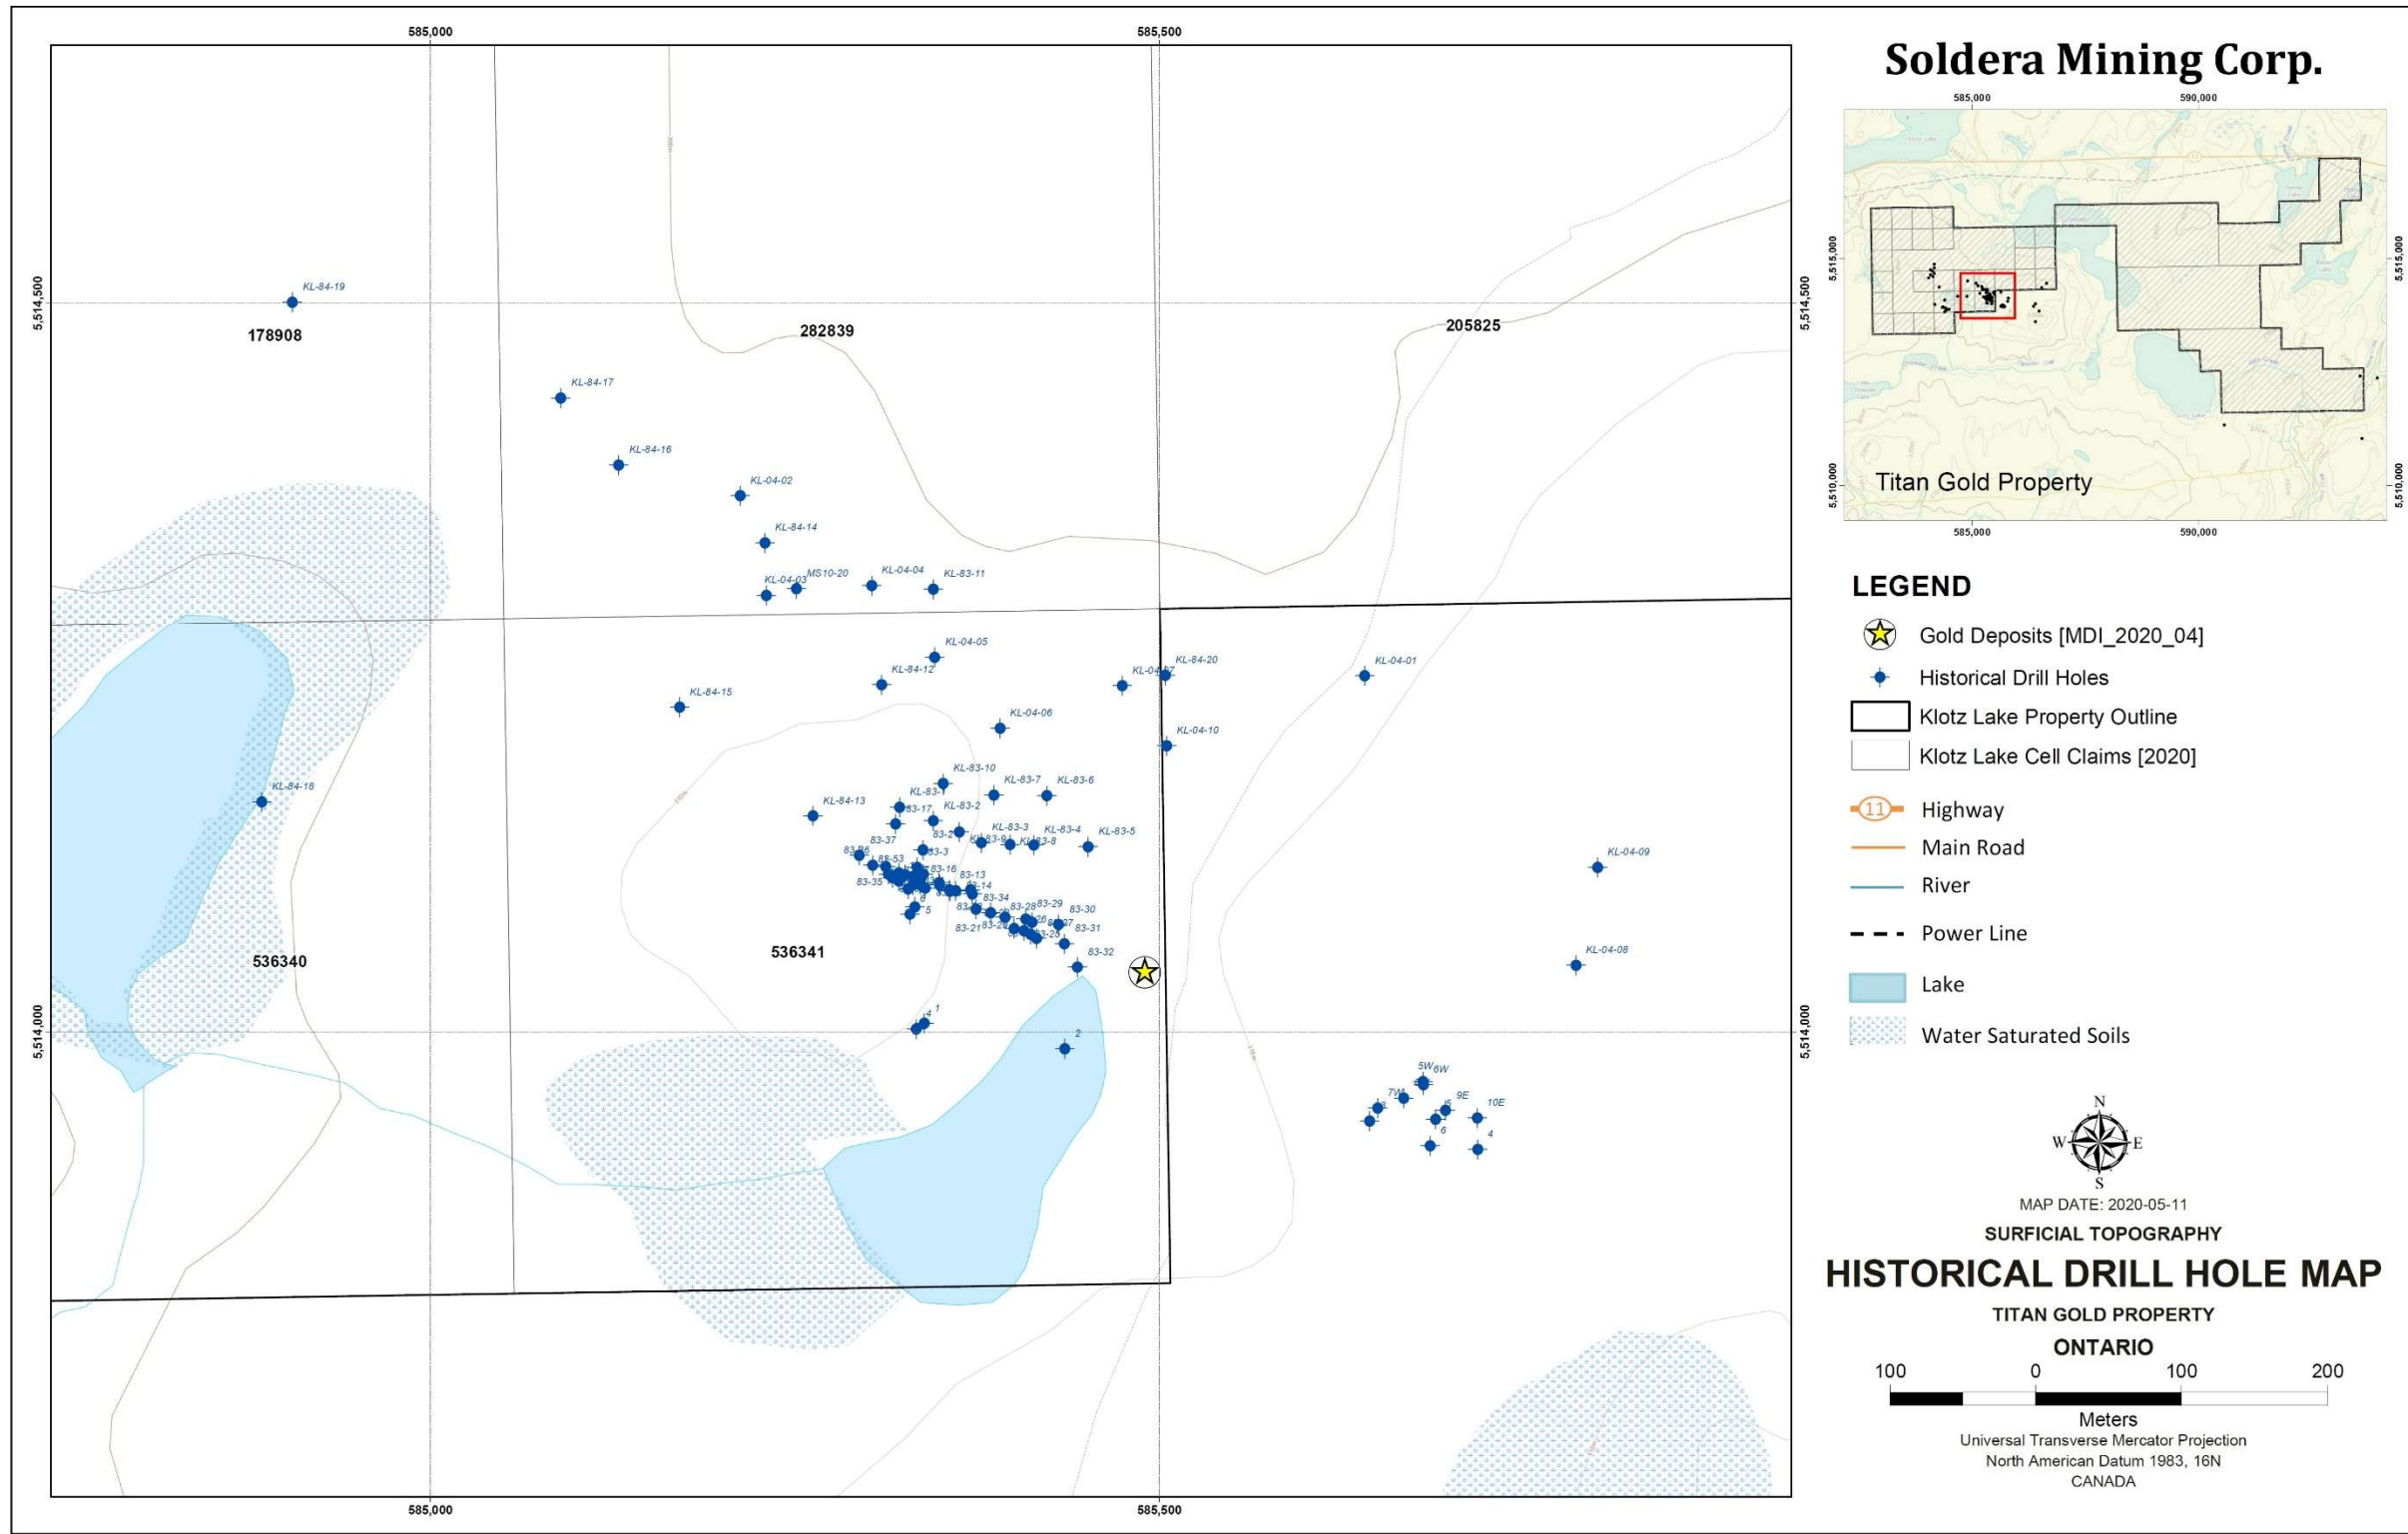


Figure 8: Historical drill hole detailed map C


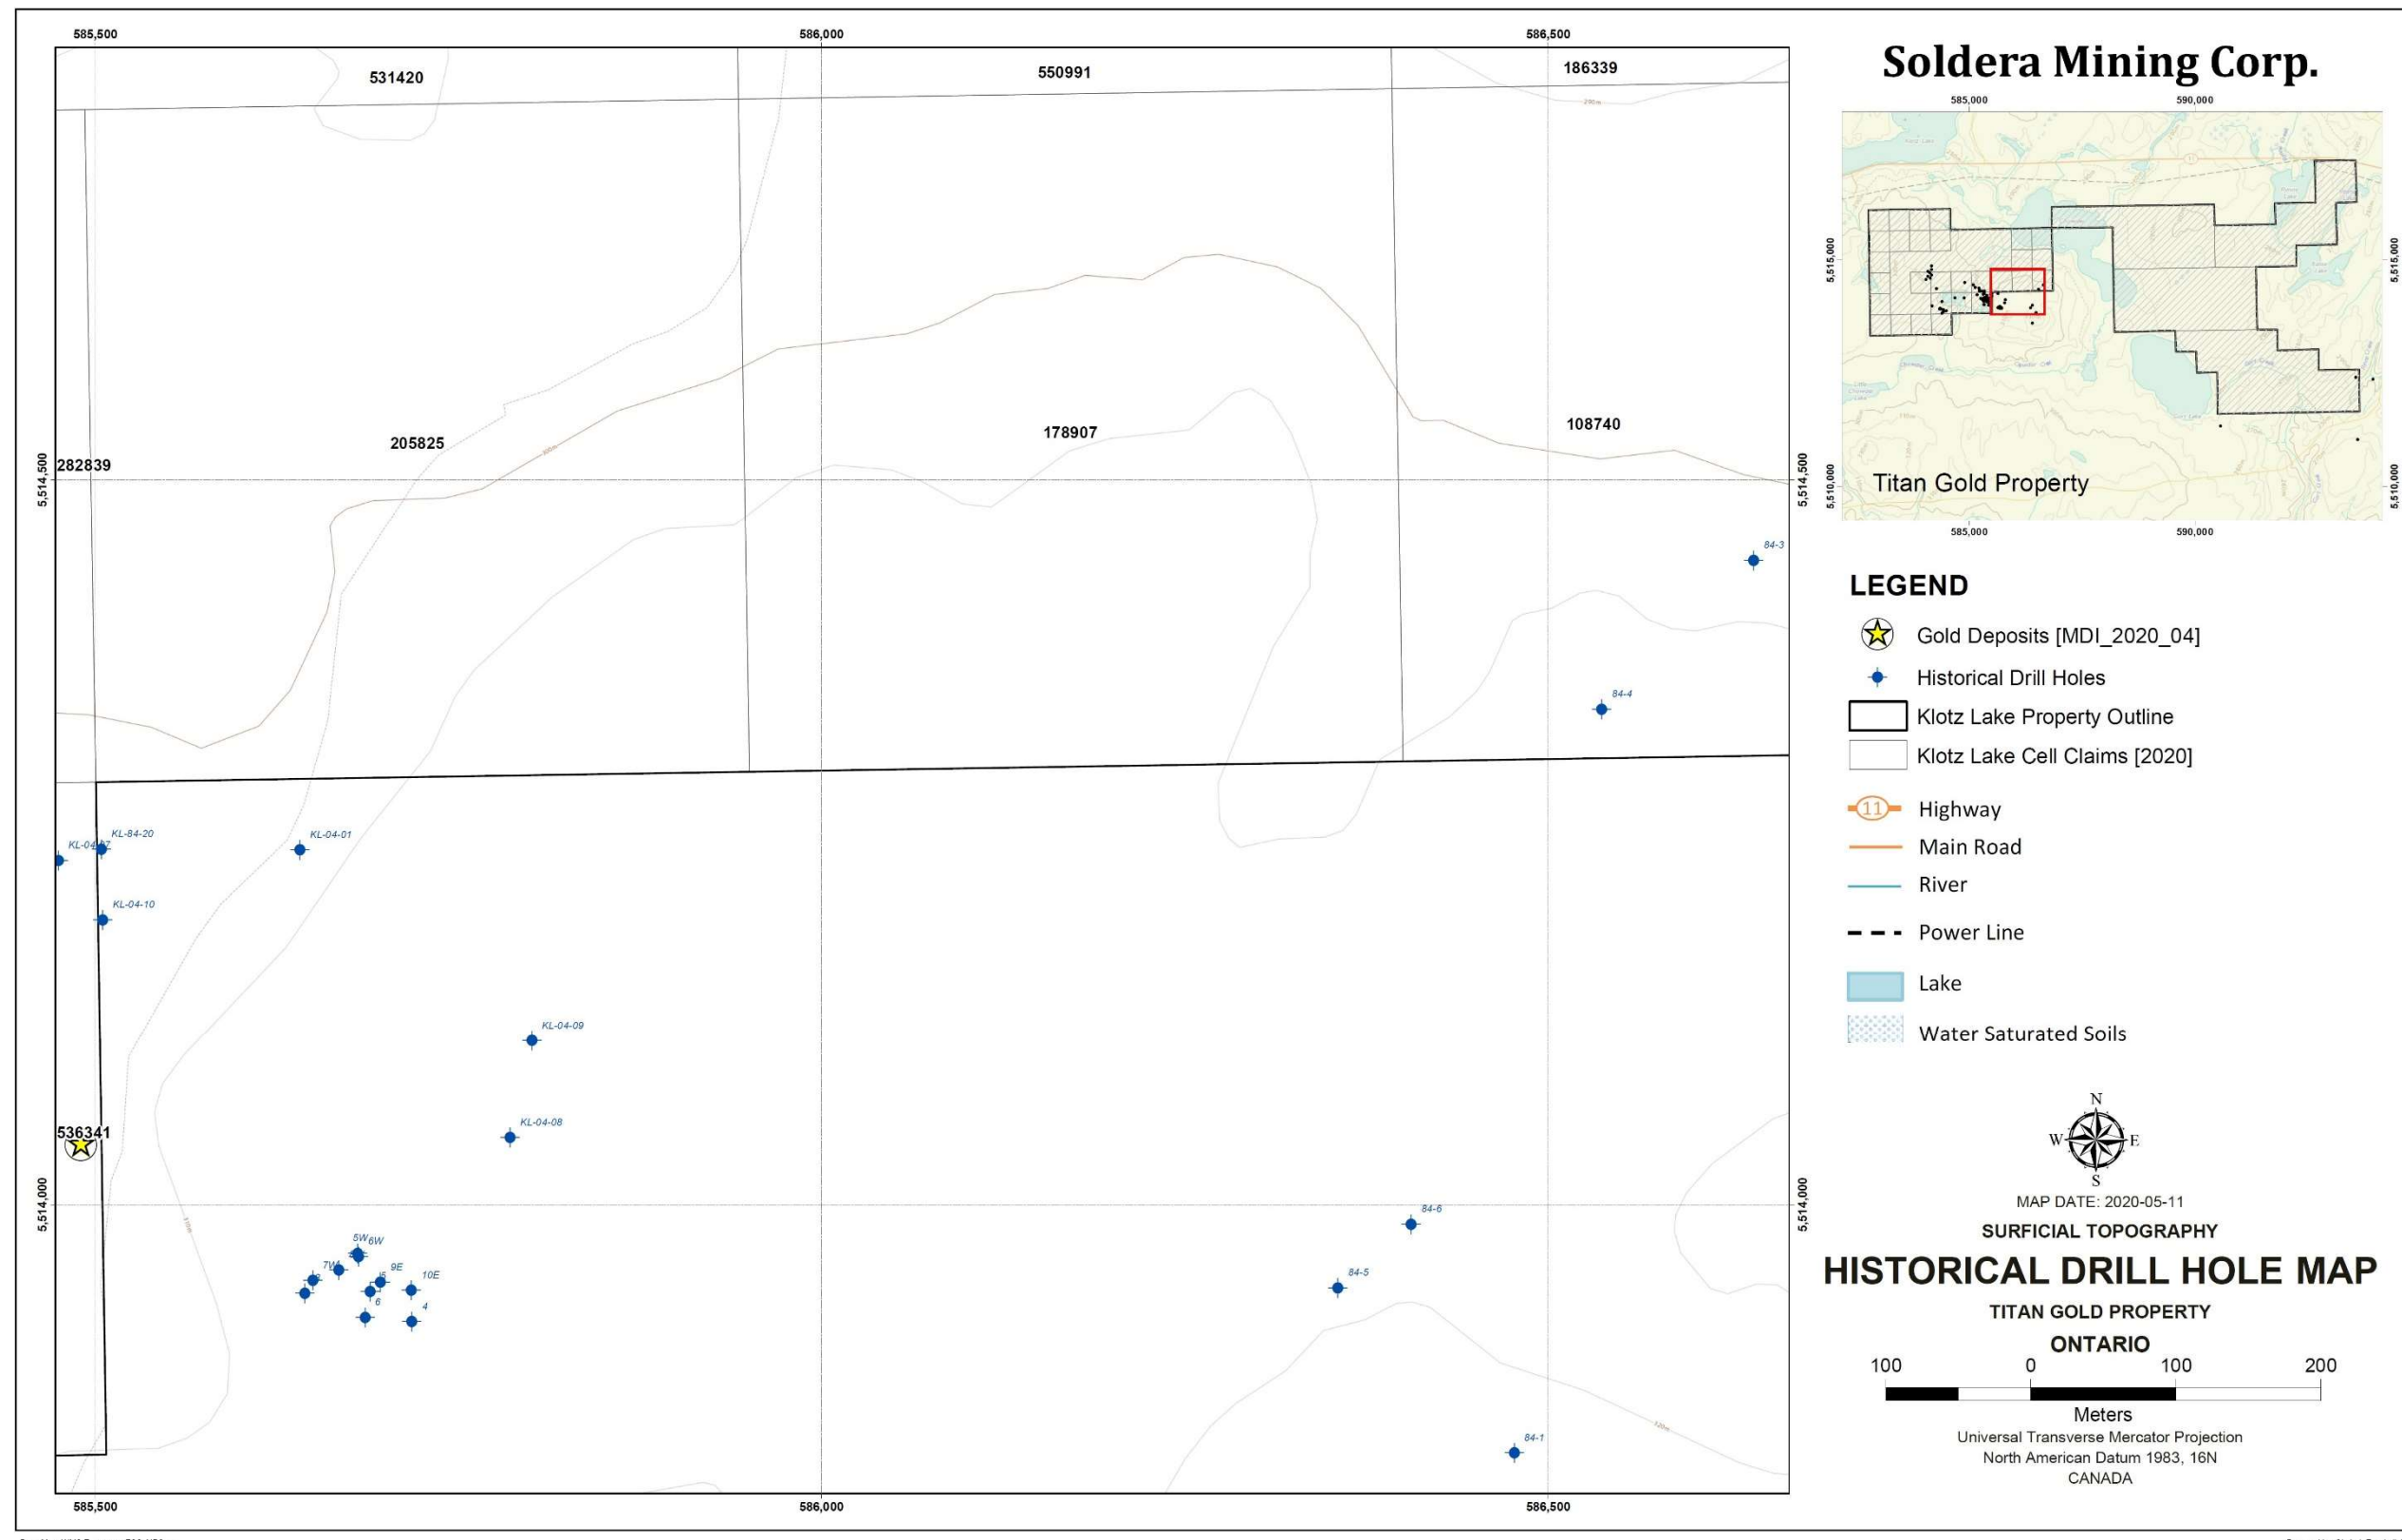


Figure 9: Historical drill hole detailed map D

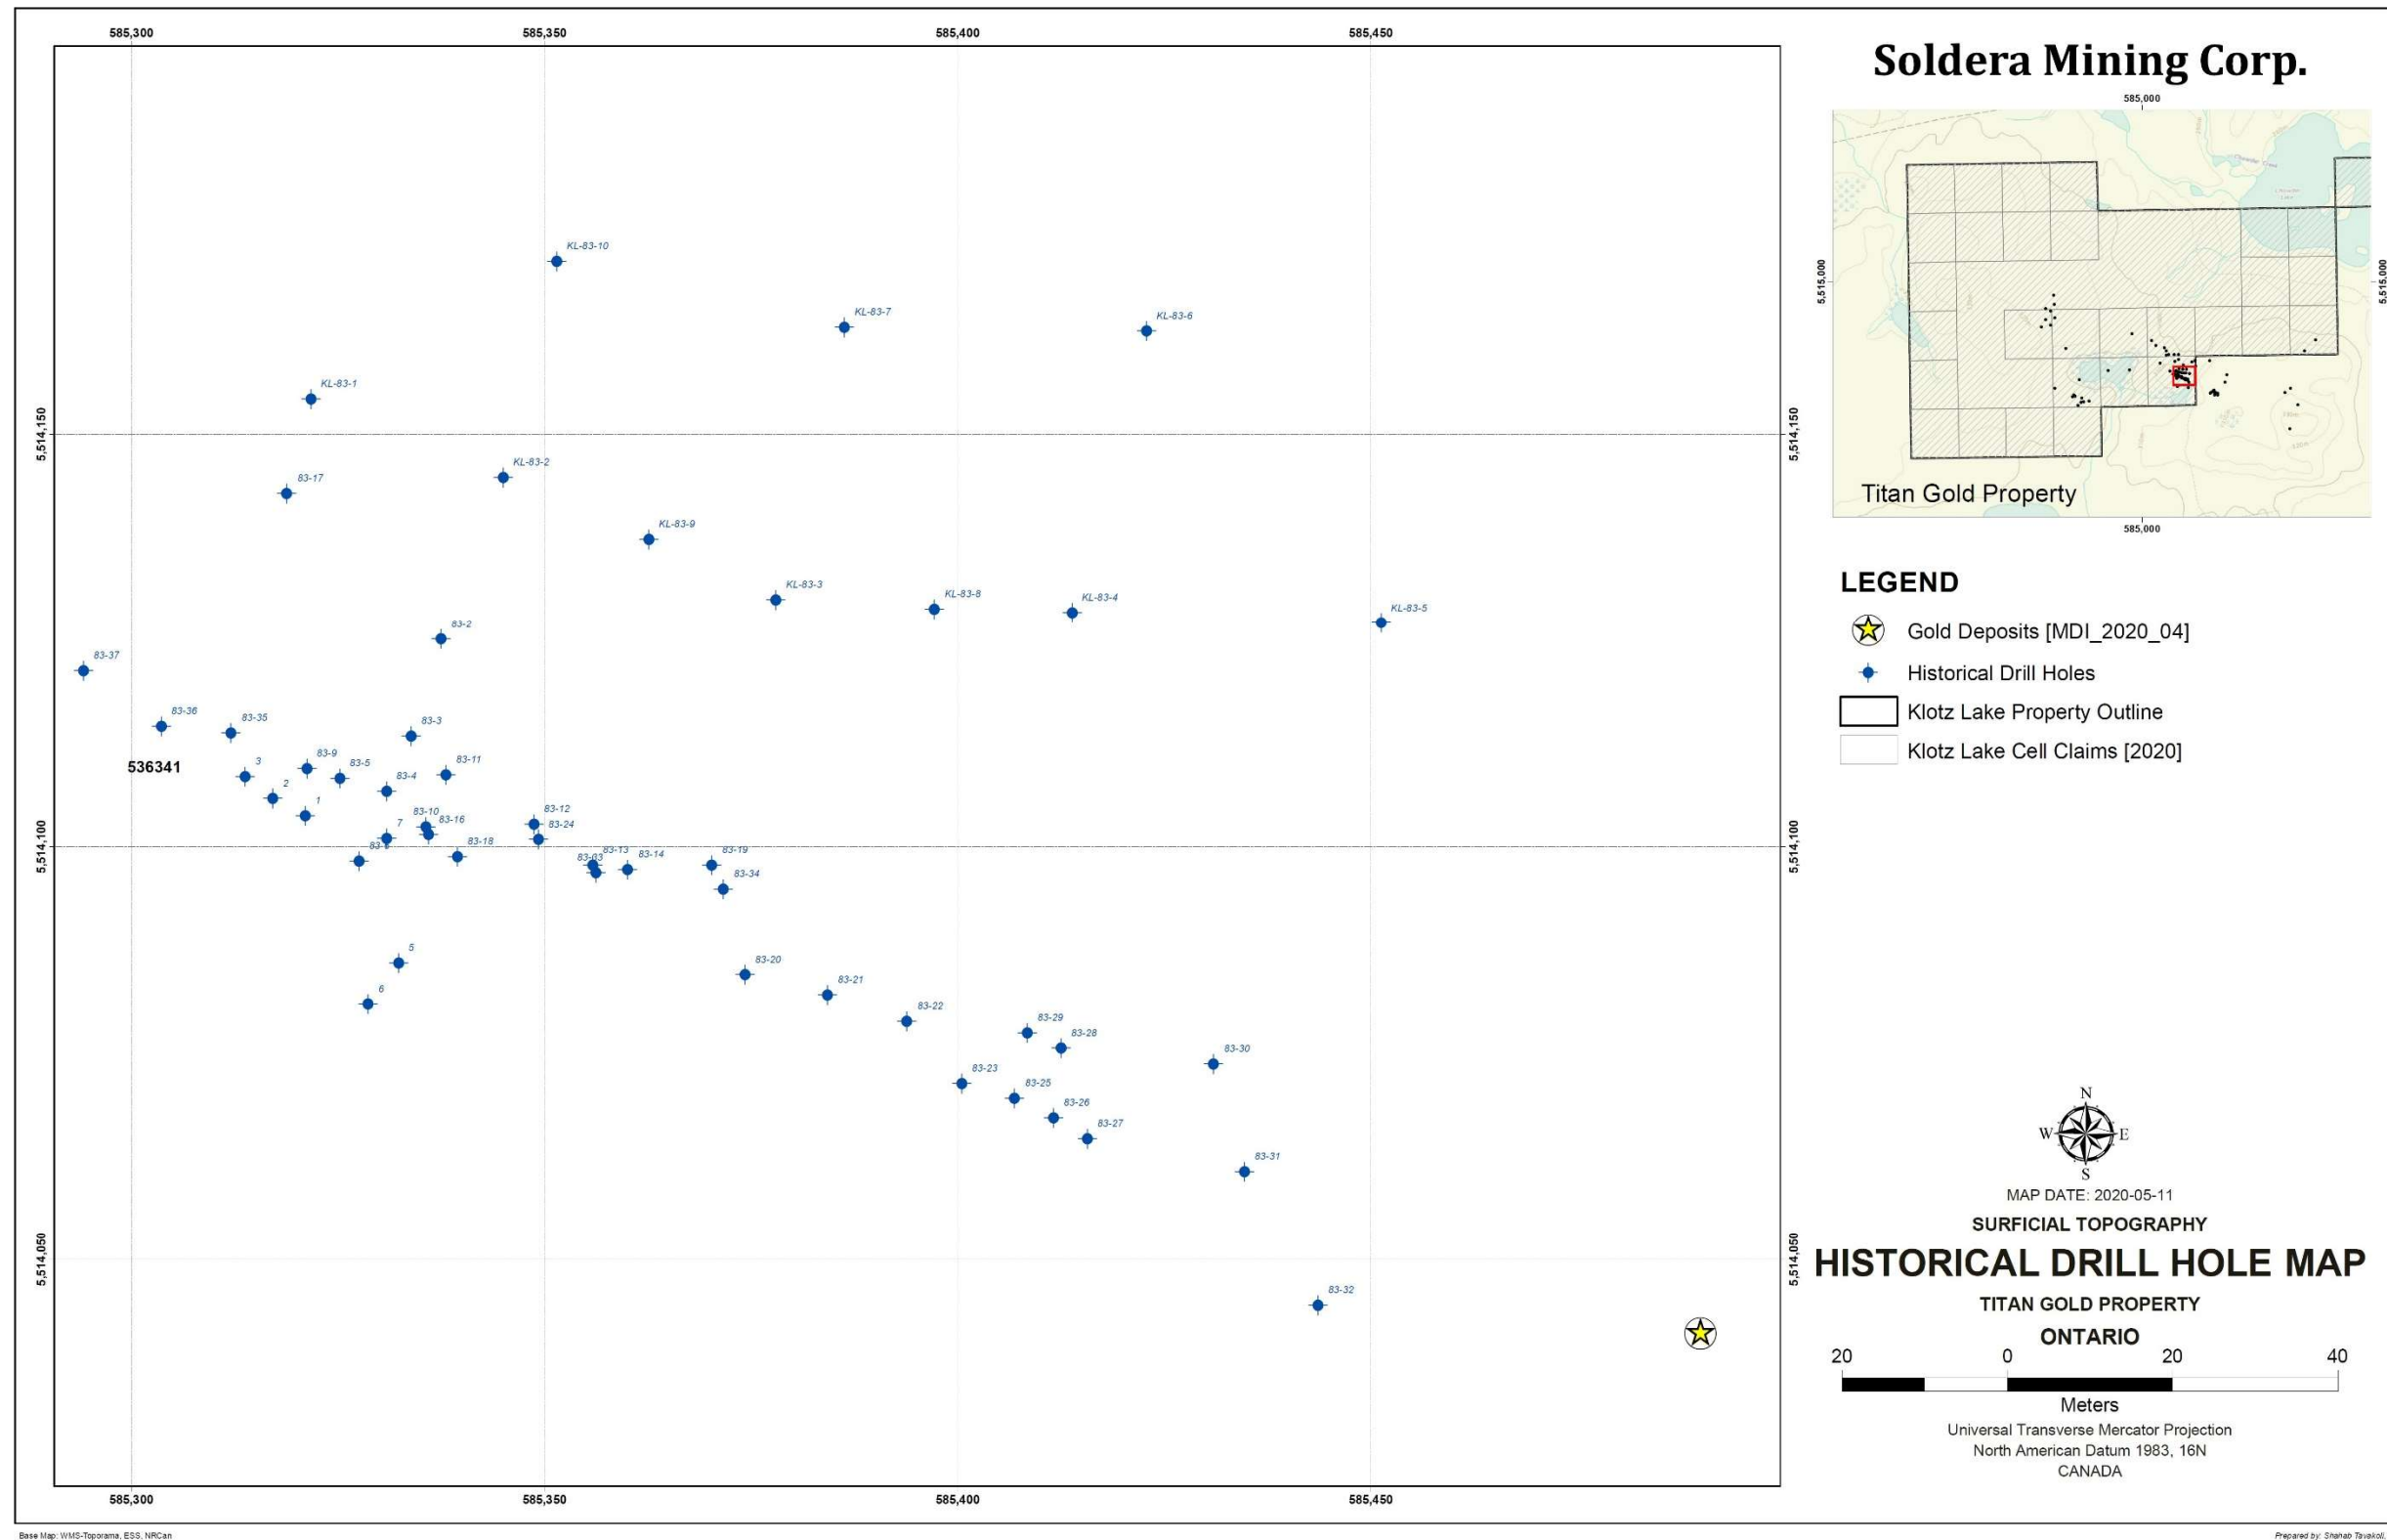

6.1 Work by Goldstream and Prodigy 2011-12

6.1.1 Field Exploration

During 2011-12 period, Goldstream Exploration and Prodigy Gold completed a field exploration program consisting of line cutting, ground geophysical survey (Induced Polarization and Magnetic), geological mapping, trenching and channel sampling on an established grid in areas of Titan showing, Morrow Lake and Tomorrow Lake. As a result of this work, a total of 42 “high priority” targets were identified throughout the grid. Several of these anomalies coincide with five (5) known gold showings. Prospecting teams followed-up an investigation of these anomalies in the field in the fall of 2011 leading to the discovery of the Titan Showing. Here, quartz veins containing visible gold returned multiple large gold assays including 11,200 g/t Au, 5,900 g/t Au and 3,420g/t. A total of 129 channel samples were taken from three trenches at the Titan showing where gold is found in association with high silver within narrow quartz veins within strongly deformed and folded gabbro rocks. Visible gold within the quartz veins is common. Trench 10A returned the most significant gold assay values (Table 5).

Table 5: Highlights of 2011 Titan Showing Channel Sampling Program

Titan Trench	Sample No.	Au g/t	Ag ppm	Length (m)	Host Rock
Trench A (IOA)	C60508	6.24	1.2	0.3	Gabbro
	C60517	3.89	2.8	0.67	Quartz Veined Gabbro
	C60527	12.3	14.2	0.49	Quartz Veined Gabbro
	C60575	31.1	1.6	0.37	Quartz Vein
	C60577	10.9	3.4	0.39	Quartz Vein
	C60591	4.56	2.9	0.44	Quartz Vein
	C60600	1.7	4.2	0.24	Gabbro
	C61634	14.2	20.6	0.58	Quartz Veined Gabbro
Trench C (IOC)	C55809	1.51	0.3	0.35	Gabbro
	C55810	1.01	0.7	0.61	Gabbro
	C55816	25.3	2.2	0.28	Quartz Veined Gabbro
	C55827	2.12	0.4	0.31	Quartz Vein
	C55835	1.19	0.6	0.43	Gabbro

6.1.2 Diamond Core Drilling

Goldstream completed nine (9) drill holes totaling 2,021 m between January 22, 2012 and February 21, 2012. The holes, numbered KL-12-01 to KL-12-09, were all drilled on Titan Showing (Table 6, Figures 5 and 6). This drill program was designed to test the extent of gold mineralization located immediately beneath the Titan Gold Showing as well as test a number of additional IP

target anomalies located near surface defined by Matrix. All holes were drilled in a southwesterly direction perpendicular to the northwesterly trending foliations/veining visible at the Titan Showing and parallel to quantitative section lines.

The drilling was carried out under contract by North Star Drilling of Thunder Bay, Ontario, under the supervision of Paul Dunbar, P.Geo., the Goldstream Project Manager and Vice President of Exploration. All drilling utilized a NQ drill string.

The drill core was logged and sampled by geologists Cheyenne Sica and Marc Pateneau at Prodigy's Bush Lake core facility located off Road 801 north of the Trans-Canada HWY 11. Drill core was split at the Bush Lake facility. During logging, the percentage core recovery and "Rock Quality Designation ("RQD") was determined and results entered into the drill logs. All drill core was photographed to provide a permanent visual record.

Drill hole collar locations were surveyed using a Trimble RTK survey grade GPS receiver. The drill casing and casing shoe were left in each hole and each casing was capped and stamped with the hole number (Report 20013940).

Table 6: 2012 Diamond Drill Program

Hole No.	Collar Coordinates (Zone 16 NAD83)			Dip (deg)	Az. (deg)	Casing (m)	Length (m)	Start Date	Finish Date	No. of Samples
	Easting	Northing	Elev. (m)							
KL-12-01	584133	5514714	316	-45	210	3.5	251	22-Jan-12	26-Jan-12	374
KL-12-02B	584171	5514779	316	-45	210	3.1	350	31-Jan-12	4-Feb-12	514
KL-12-03B	584048	5514567	316	-45	210	3.0	200	5-Feb-12	7-Feb-12	256
KL-12-04	584087	5514635	315	-45	210	3.2	113	7-Feb-12	8-Feb-12	167
KL-12-05	584165	5514868	315	-60	210	3.5	473	9-Feb-12	15-Feb-12	667
KL-12-06	584087	5514737	317	-45	210	3.0	131	15-Feb-12	16-Feb-12	178
KL-12-07	584136	5514585	315	-48	210	1.5	132	17-Feb-12	18-Feb-12	177
KL-12-08	584175	5514653	312	-45	210	15.0	201	18-Feb-12	19-Feb-12	289
KL-12-09	584279	5514632	317	-45	210	1.5	170	19-Feb-12	21-Feb-12	224
TOTALS							2,021			2,846

6.1.3 Diamond Core Drilling Results

The drilling program was designed to test the extent and nature of gold mineralization at the new Titan gold showing. The best gold drill hole intersections are presented on Table 7 below.

Table 7: 2012 Titan Showing Drill Results Highlights

Hole ID	From (m)	To (m)	g/t Au / core length	Comments
KL-12-01	122.9	125.9	11.16/3.0m	moderately sheared zone within medium-coarse grained gabbro; strong biotite + chlorite + amphibole alteration with weak to moderate carbonate + silica alteration; 10-40% quartz-carbonate stockwork throughout interval; typically 5% pyrite disseminations with up to 10% pyrite disseminations and <=1% pyrrhotite; mineralization is typically concentrated at wallrock/stockwork contacts; main Titan shear zone(?)
including	125.4	125.9	61.8/0.5m	moderately sheared mafic to gabbroic protolith; 10% qtcsw; <=5% pyrite disseminations and <=1% pyrrhotite; hostrock is strongly biotite + chlorite + amphibole altered with moderate silica flooding; main Titan shear zone(?)
KL-12-01	195.3	199.3	2.95/4.0m	moderately to strongly sheared zone within gabbro; strong biotite + chlorite + amphibole alteration with weak to strong silica flooding; 45 - 65% quartz-carbonate stockwork throughout interval; 2 - 15% pyrite disseminations +/- seams; <=5% pyrrhotite mineralized as fracture-fill
including	195.3	195.8	7.38/0.5m	strongly sheared zone within a gabbro; gabbro is strongly silicified + amphibole + chlorite + biotite altered gabbro with 50-65% quartz-carbonate stockwork; 7% pyrite dissems and trace pyrrhotite
and	197.5	198.1	7.60/0.6m	strongly silicified zone with weak chlorite + amphibole + biotite alteration; 70-80% quartz-carbonate stockwork; hostrock contains 15% pyrite with 5% pyrrhotite;
KL-12-02B	42.7	43.2	1.33/0.5m	sheared gabbroic host; hostrock is strongly biotite altered with weak silica flooding; weak to moderate magnetic signature; 10% quartz carbonate veins; 7% pyrite and 1% pyrrhotite northern shear zone (north of main zone)
	253.4	254.7	2.22/1.3m	moderate to strong shear zone within moderate amphibole + biotite + silicified gabbro with weak to moderate magnetic signature; 15% quartz-carbonate stockwork 2% pyrite disseminations; shear zone may be fault terminated by a northwesterly striking fault
KL-12-03B				No significant assays
KL-12-04	101.2	102.3	1.37/1.1m	sheared mafic crystal tuff to gabbro host; strongly amphibole with moderate chlorite + biotite altered; 3% quartz-carbonate veins; 2% pyrite dissems +/- pyrrhotite: southern shear zone (south of main zone)
KL-12-05	273.1	273.9	1.30/0.8m	wkly to moderately sheared zone within fine grained to medium grained gabbro; moderate to strong amphibole + biotite alteration with wk to mod chl + sil; locally wk magnetic signature that increases with shear; 2-4% qtcsw with up to 20% carbonate stringers; 1-2% py assoc with stringers, 1-2% po; potential continuation of the northern zone but may also fault terminate
	275.4	275.8	1.84/0.4m	strongly sheared zone within a gabbro, augens evident; gabbro is strongly biotite altered with 70-80% carbonate stringers +/- quartz; 2-3% very fine-grained pyrite dissems +/- pyrrhotite

Hole ID	From (m)	To (m)	g/t Au / core length	Comments
KL-12-06				No significant assays
KL-12-07	37.3	37.6	1.99/0.3m	weak shear zone within medium to coarse grained gabbro; moderate biotite + chlorite + amphibole alteration; 2-3% quartz-carbonate stockwork; 2% pyrite disseminations associated with stockwork; potential extension of the southern zone
KL-12-08	15.4	23.9	0.45/9.9m	moderately sheared zone within fine grained gabbro; moderate amphibole + silica alteration + mod to strong biotite; 5-10% quartz-carbonate stockwork with 25-80% qtcsw locally; 1-2% py dissems in hostrock; main Titan shear zone (?)
	48	50.5	43.78/2.5m	this mineralized zone is hosted at the contact of a mafic massive flow and a fine to medium grained gabbro; both units are moderately biotite + chlorite + silica altered; <=5% qtcsw; wk to mod mag; ~2% po dissems assoc w/ biotite; 1-2% py; main Titan shear zone (?)
including	49.4	49.8	271.00/0.4m	Visible gold ; fine to medium grained gabbro; mod amph + chl + bio wk to mod sil; <=5% qtcsw; wk to mod mag; ~2% po dissems assoc w/ biotite; 1-2% py; main Titan shear zone (?)
KL-12-09	115	121.5	0.65/6.5m	moderate to strong shear hosted by dark grey fine to medium grained gabbro with moderate to strong biotite + amphibole alteration; , str amp, wk sil, abundant fracture controlled cb alteration (10%), ~5% quartz carbonate veins increased in first 1m of section, ~2% py locally up to 5%; extension of northern zone (?), extension of main Titan zone (?)

The drilling intersected mafic pillowed volcanic flows to pillow breccias and synvolcanic gabbro rocks, with smaller mafic pyroclastic and volcanoclastic units. Small, typically less than 0.5 m wide felspar porphyry dykes, often silicified, were also encountered cross cutting the main lithologies.

The program intersected numerous small shear zones, which appear to be striking sub-vertically in a northwesterly direction. The shear zones are interpreted to cross-cut lithologies. This shear system is complex and there has been no previous work completed to test the morphology of the zone. The mineralized shear zones intersected by the drilling program are narrow and typically host between 1.0g/t - 3.0g/t Au over 2.0 m - 4.0 m. High grade gold zones (61.8 g/t over 0.5 m and 271g/t over 0.4 m) are even more narrow and sporadic in nature. The mineralized zones are accompanied by increased shearing and alteration with a sulphide content of typically <5%, dominantly in the form of pyrite disseminations with subordinate pyrrhotite. The zones are hosted by a fine - coarse grained weakly to strongly amphibole + biotite + silica +/- carbonate altered hostrock, with variable amounts of quartz-carbonate stockwork and veining, typically <=5%, with localized increases in modal abundance of quartz.

6.2 2016 Exploration Work

In November 2016, Pleson Geoscience carried out exploration work on Legacy Claim 4266307 which included compilation of historical data, prospecting, and channel sampling of outcrops.

The data compilation work was performed by geologist Ben Kuzmich. The fieldwork was carried out from November 14-17, 2016. Results of seven channel samples indicated gold values in the range of 0.011 g/t to 51.1 g/t (1.8 ounces per ton). One channel sample came back with 5.37 g/t gold over one-meter length (AR 2.57590, March 2017). Total cost of this work was \$11,734.

Table 8: 2016 sampling results

Sample ID	Easting	Northing	Assay (g/t)	Type	Description
1192101	584124	5514700	0.077	Channel	Start of channel, 0-1m, azimuth 175, silicified metavolcanic, highly foliated, no sulphides.
1192102	584124	5514700	5.37	Channel	1-2m same azimuth, fine grained disseminated po 3%, tr chalcopyrite, 1% fine grained blebs of pyrite associated to quartz vein in a sheared, silicified MMVOL, highly foliated.
1192103	584124	5514700	0.986	Channel	2-3m, same azimuth, same lithology, and structure as last sample. Less quartz veinlets than previous sample.
1192104	584119	5514697	0.011	Grab	MMVOL- carb alteration, no sulphides, late stage fracture fills w/ quartz-carb.
1192105	584111	5514694	0.085	Grab	MMVOL- carb alteration, no sulphides, late stage fracture fills w/ quartz-carb.
1192106	584126	5514701	51.1	Grab	MMVOL- highly sheared siliceous, 2% bleby f.g py with strong quartz veinlets and tr cpy.
1192107	584129	5514643	0.166	Grab	Iron Formation sample, fragment of IF in southwest portion of MVOL shear zone, strongly fractured with blue quartz infills, tr diss py in quartz vein, highly magnetic.

6.3 2019 – 20 Exploration Work by Pleson Geoscience

Alex Pleson, the Property Vendor carried out exploration work on the Property from September 2019 to May 2020 which included prospecting, geological mapping, trenching, channel sampling, ground geophysical surveys and assaying. Total cost of exploration work from September 2019 to May 2020 is \$82,500 and is summarized in the following sections.

6.3.1 Mapping, Prospecting, Trenching, and Sampling

This work was completed in two fieldwork campaigns, where the first fieldwork was done from September 18-24, 2019 and its purpose was mainly to carry out prospecting and geological mapping in the areas adjacent to the historical showings to find extension of the targeted mineralization trend. The second round of fieldwork was completed during May 1-10, 2020 period. It included trenching and stripping in Morrow Lake and Titan areas to further expose the mineralized shear zones. This work was followed by a prospecting program.

During this work, a total of 27 samples were taken and 14-line kilometers area was mapped (Figures 10 and 11). Additionally, a total area of 200 square meter was excavated through trenching to expose bedrock and 5 kilometers of trail were made to improve access to the Property using a D5 Cat Dozer and an excavator Kubota KX040.

The results of prospecting and geological work sampling indicated lower values of gold with only one sample indicated 2.84 g/t (Table 9).

Table 9: Grab samples details

Sample ID	Easting	Northing	Type	Description	Au (g/t)
467751	585903	5514360	Grab	Ultramafic contact to fel vol. 1% py	0.006
467752	585817	5514480	Grab	mafic vol with 1% on fracture planes	0.006
467753	585801	5514478	Grab	M. Vol on contact with F. Vol. fine grained, diss 1% py, <1% cpy	2.84
467754	585827	5514505	Grab	mafic w/ qtz stringers 1% py	0.16
467755	585839	5514549	Grab	5cm wide qv, tr py, 2% py in wallrock	0.006
467756	585744	5514571	Grab	M.Vol. fine grained, trace disseminated py	0.007
467757	585737	5514581	Grab	old trench, felsic dyke, tr of py	0
467758	585717	5514500	Grab	QV, white quartz, rusty but no observed sulphides	0.02
467759	585673	5514545	Grab	Gabbro, magnetic, m.g.	0.007
467760	585684	5514576	Grab	ultramafic, >1% py	0
467761	585905	5514614	Grab	M. Vol, strongly foliated, siliceous, 1.5% diss f.g py	0.152
467762	585202	5514342	Grab	gabbro, massive sulphides	0.038
467763	585264	5514448	Grab	gabbro, tr py	0

Sample ID	Easting	Northing	Type	Description	Au (g/t)
467764	585393	5514057	Grab	bull qtz	0.09
467765	585278	5514201	Grab	Gabbro	0.045
467766	584604	5514332	Grab	gabbro, 1% py	0.021
467767	584617	5514363	Grab	1cm wide qtz, massive py	0.227
467768	584707	5514424	Grab	felsic volcanic, f.g. massive texture	0.011
467769	584756	5514406	Grab	gabbro, tr. Bleb primary py	0.009
467770	584900	5514570	Grab	M.Vol	0.021
467771	584901	5514567	Grab	F.Vol, with minor qtz-carb stringers, no sulphides	0.008
467772	585007	5514385	Grab	QV, stockwork through dark v.f.g, massive m. vol,	0.009
467773	585097	5514392	Grab	Alt. mafic volcanic, schisty, no sulphides	0.005
467774	585112	5514310	Grab	QV, milky white, biotite and tourmaline on margins	0.056
467775	585200	5514474	Grab	QV, white, slightly rusty on margin	0.012
467776	585192	5514589	Grab	QV, white, slightly rusty on margin	0.008
467777	585672	5514551	Grab	QV, white, slightly rusty on margin	0.017

Figure 10: 2019-20 Sampling and Trench Location Map


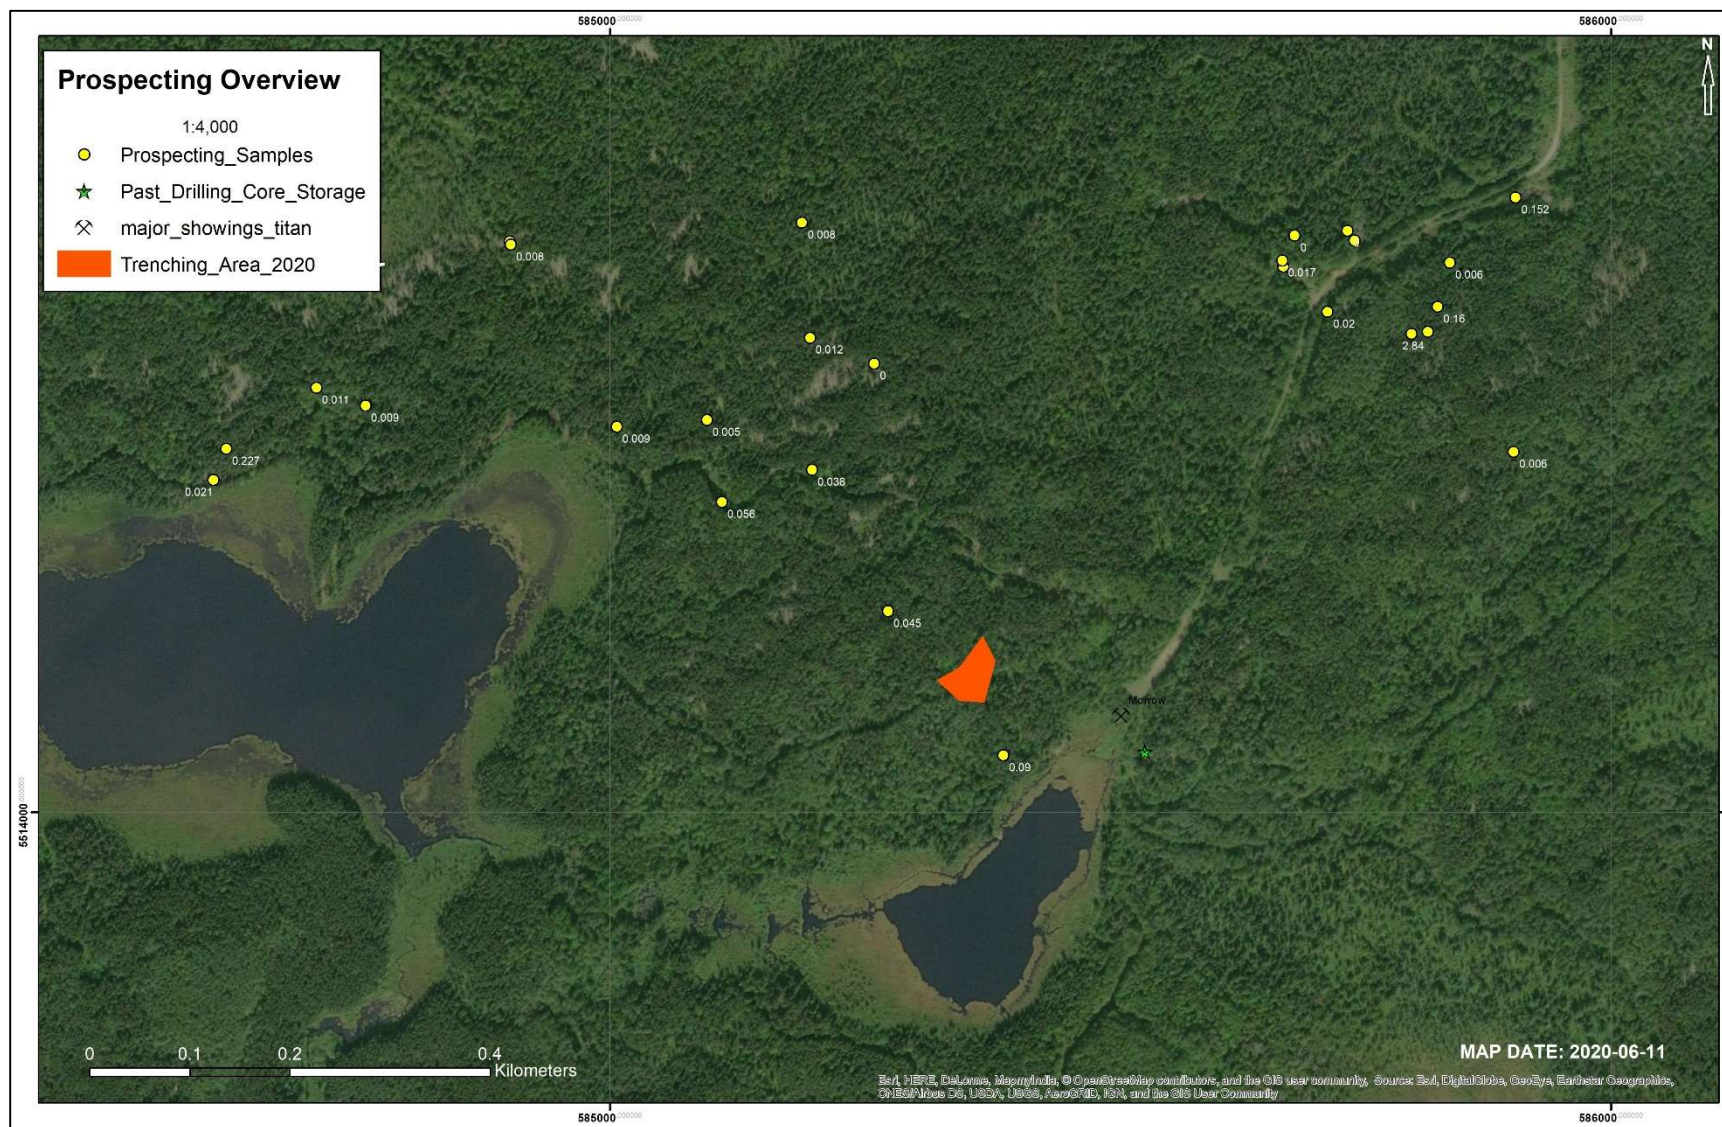


Figure 11: 2019 Updated Map of the Property Geology

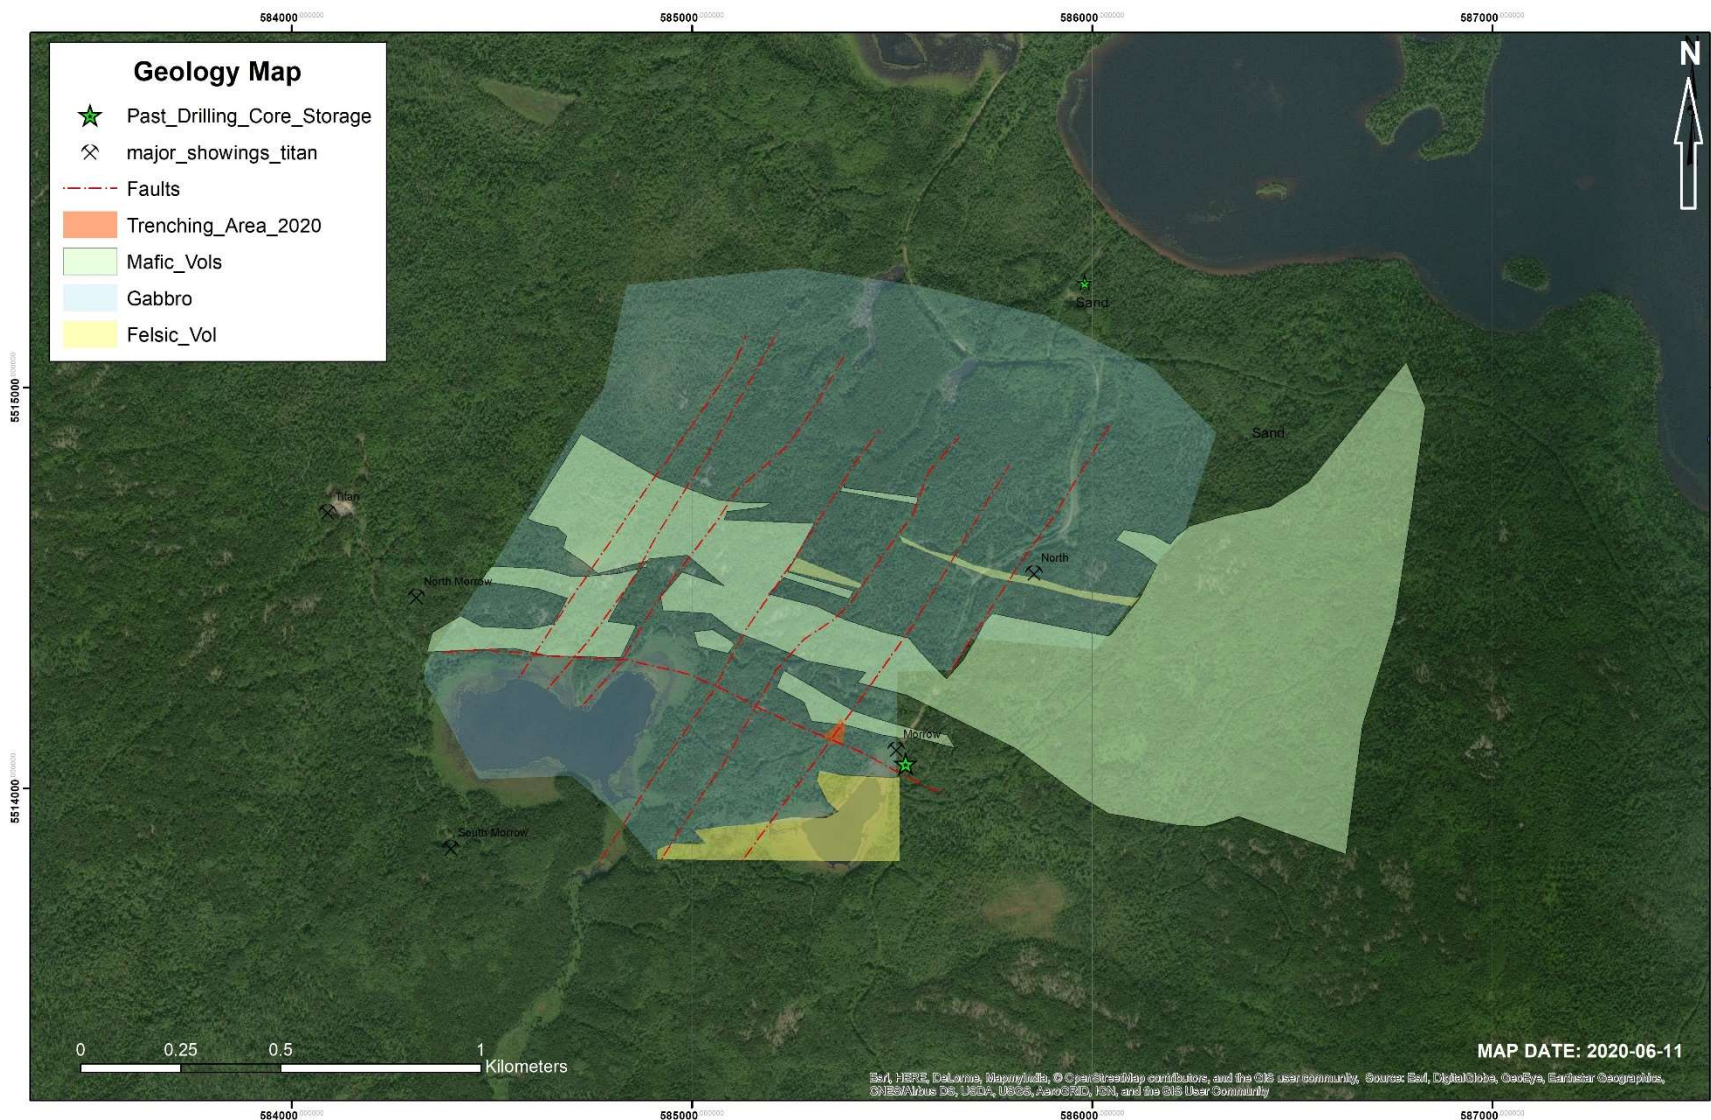

6.3.2 Ground Geophysical Survey 2020

A VLF and ground magnetic survey was completed on the Iron Grid from January 5-15, 2020 with a total 14 line-km at 50m line spacing and 25m stations (Figures 12 and 13). Similarly, a second magnetic / VLF was completed on the Morrow Grid from May 1-10, 2020 with a total 14 line-km at 50m line spacing and 25m stations (Figures 12 and 14).

The magnetic surveys utilized the Scintrex IGS-MP4 proton precession magnetometer having an accuracy of ± 1 nT. The variations of the magnetic field were monitored by a Scintrex IGS-MP4 recording base station magnetometer. It was located within the grids being surveyed or within a nearby grid. The magnetometer field observations were corrected for the day-to-day and diurnal variations of the magnetic field.

The VLF-EM surveys were carried using a Geonic's model EM16 (serial# 3353). It measures the in-phase and quadrature components and the horizontal field strength of the VLF-EM field. The VLF transmitter located at Cutler, Maine (NAA) operating at a frequency of 24.0 kHz provided the primary electromagnetic field. The interpretation results of the survey are presented on Figures 13 and 14.

VLF surveying involves measurement of the earth's response to EM waves generated by transmitters a great distance from the survey site. The source fields are effectively planar and of fixed orientation, so the response depends on the orientation of subsurface lithology, mineralization and structures with respect to the source fields.

Although there is a gap of approximately 700 m between the two survey grids, the results of surveys have shown that the mineralization trend which was explored at Morrow Lake through historical drilling and trenching can further extend to the east along strike for approximately two kilometres. It is recommended to fill the gap in survey grids to get a complete picture of the area and see the continuity of structures.

Figure 12: Ground 2019-20 geophysical survey grid location

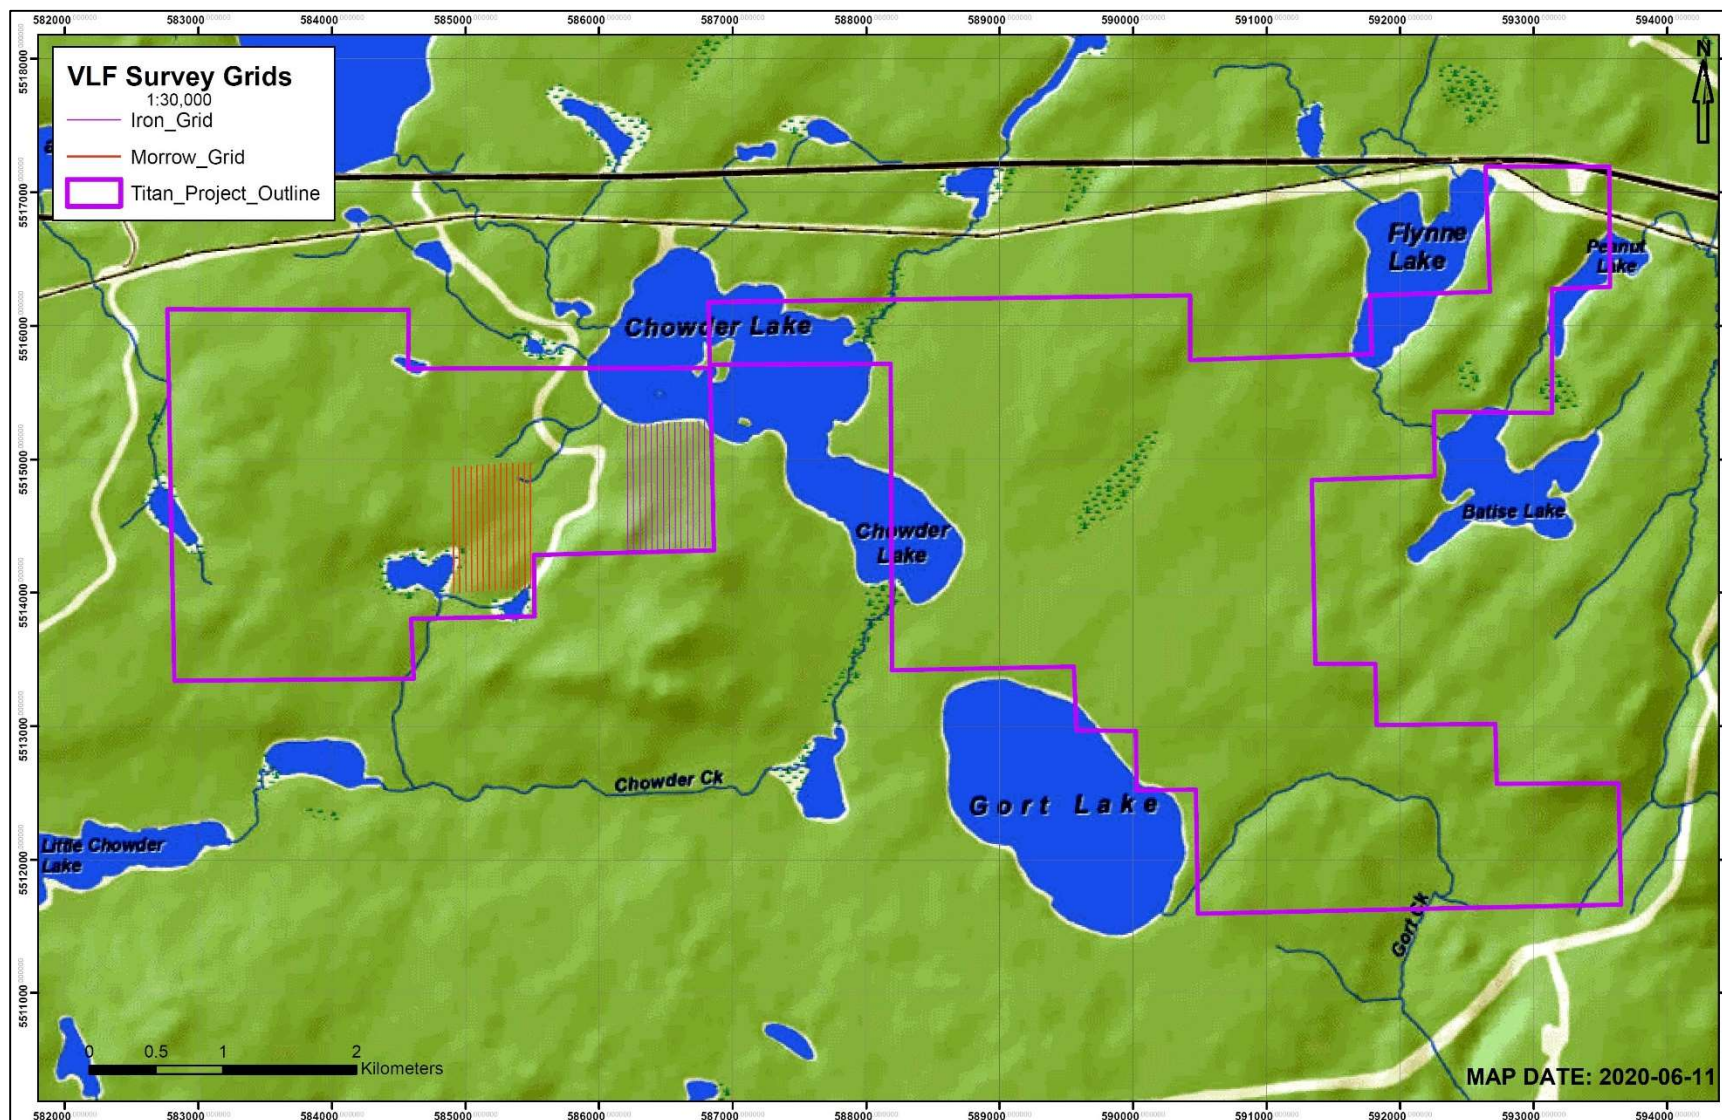


Figure 13: Iron grid geophysical survey interpretation map


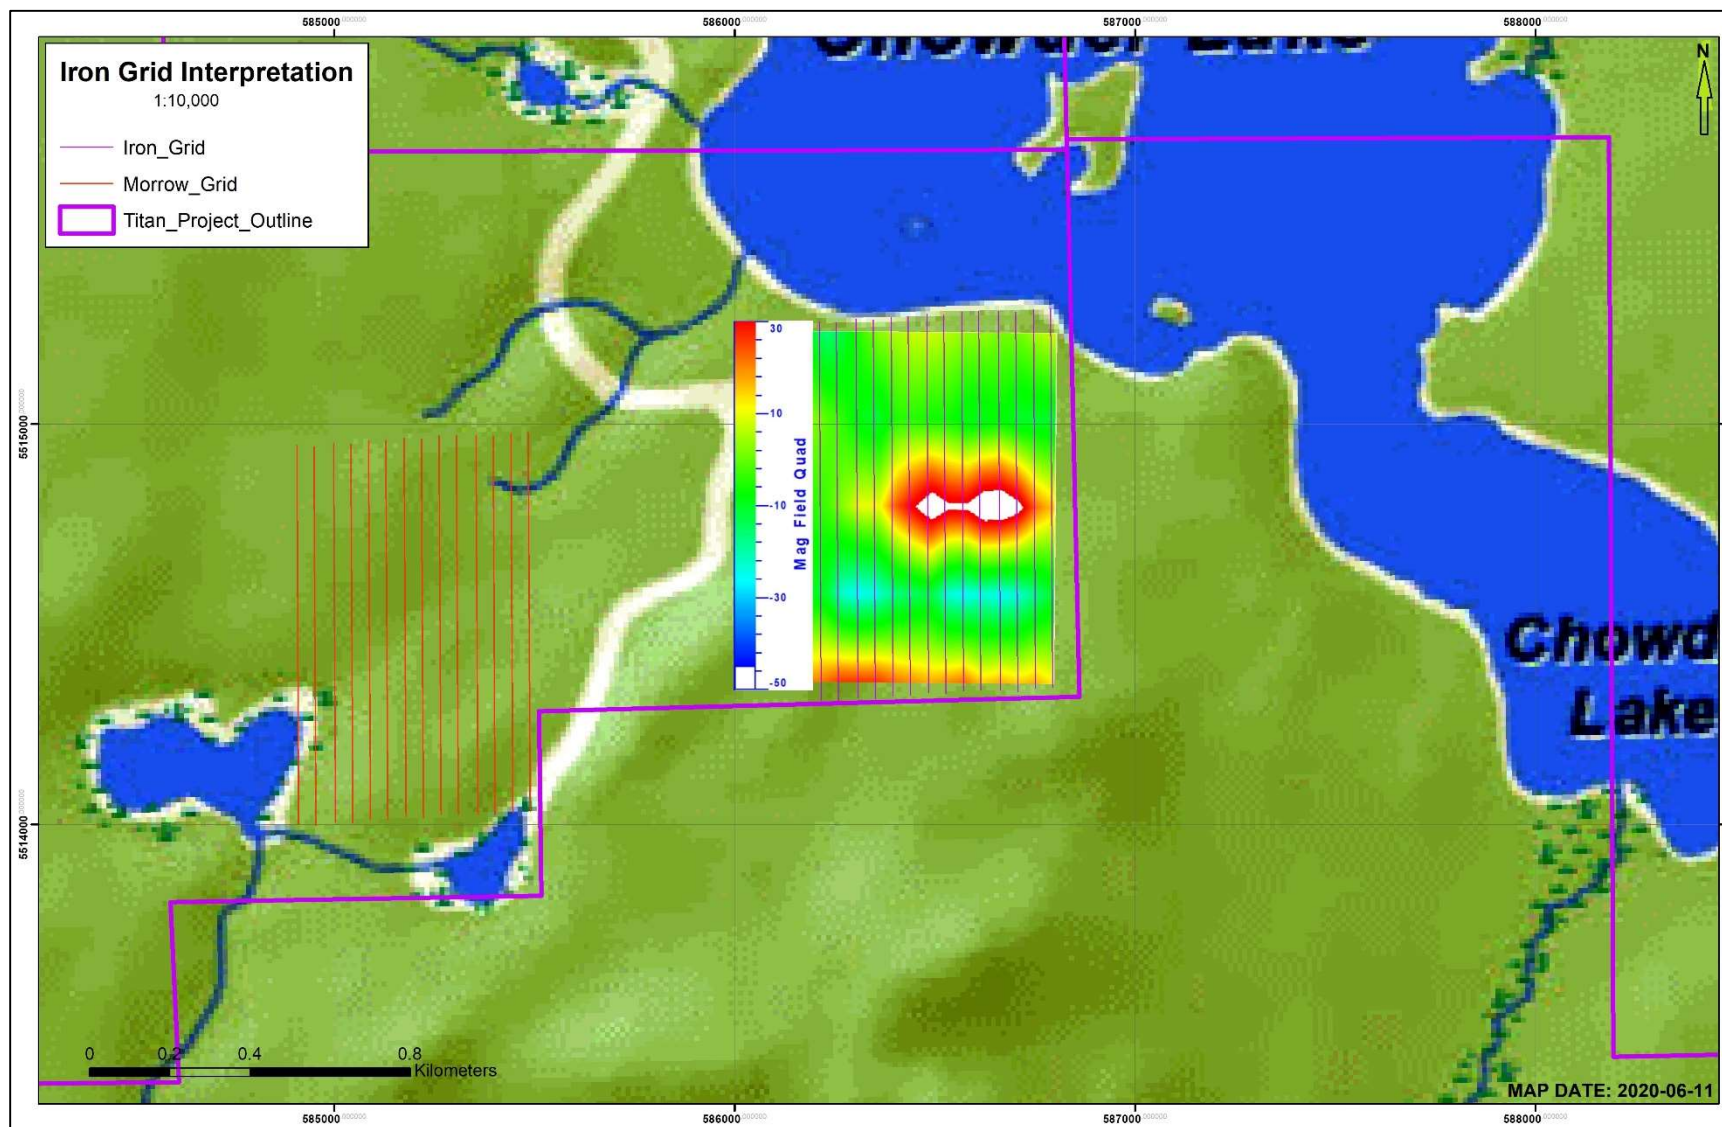


Figure 14: Geophysical survey map of Morrow Grid

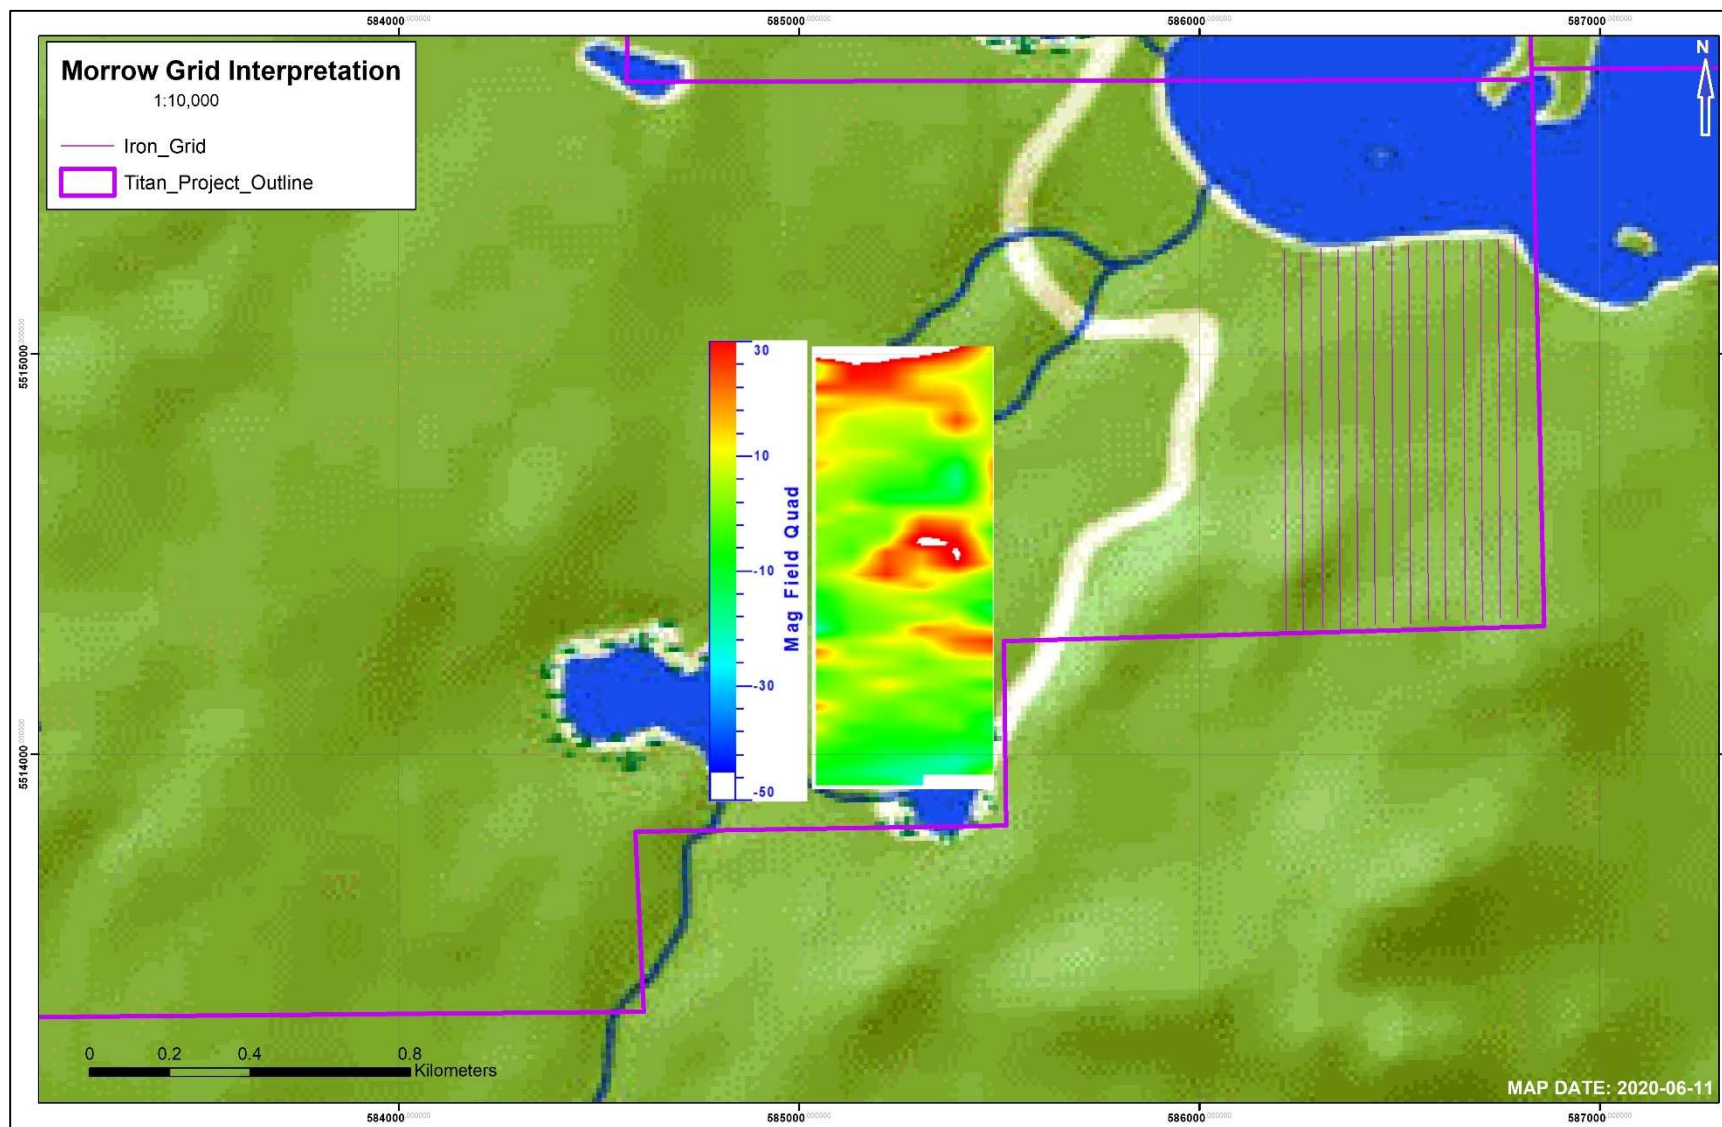

7.0 GEOLOGICAL SETTING AND MINERALIZATION

7.1 Regional Geology

The Property is situated in the Wabigoon Subprovince of the Superior Geological Province. This Subprovince consists mainly of Archean metavolcanic and metasedimentary rock sequences intruded by larger granitoid plutons, mainly granodiorite to granite in composition (Figure 15). The Klotz Lake area is underlain by late Archean rocks of the Beardmore Geraldton greenstone belt (BGB). The BGB extends from Lake Nipigon to the east of Long Lac, for a total length of approximately 150km and width of 30km. The Titan property lay on the eastern most end of the BGB. The BGB is a relatively small greenstone belt located at the boundary between the Quetico Subprovince and the eastern Wabigoon Subprovince of the Superior Province (Figure 15). The Onaman - Tashota greenstone belt, part of the Wabigoon Subprovince, contacts the BGB to the north. The Wabigoon is ~70% basaltic metavolcanics with thin inter-formational chemical + clastic metasedimentary units. The metavolcanics & metasediments have been intruded by felsic to intermediate intrusives (including the gold bearing Elmhirst Lake Stock and Kaby Lake Stock), ranging from trondjemite to granodiorite, and quartz-monzonite. The metavolcanics and metasediments have undergone greenschist metamorphism (Amukun, 1984).

The Quetico Subprovince lays to the south of the BGB and is composed dominantly of clastic metasediments with inter-formational chemical metasediments. The clastic metasediments represent a strongly metamorphosed turbidite sequence varying from arenaceous to argillaceous with local conglomerates units (Smyk *et al.* 2005). Banded iron formations within the metasediments consist of ferruginous chert, oxide (magnetite-chert) and sulphide (sulphide-chert) facies with localized graphite. There are numerous pegmatite and diabase dykes cross-cutting the clastic and chemical metasediments. General younging is to the north, but there are local south overturns. The rocks of the Quetico Subprovince have undergone lower amphibolite metamorphism (Smyk *et al.*, 2005).

Regional structural trends defined by lithologic contacts, foliations, gneissosity and faults are aligned mainly easterly to northeasterly in the central Wabigoon Subprovince area and indeed in most of the western Superior Province. The easterly trending boundary between the Quetico and Wabigoon subprovinces represents the most regionally extensive structural element in the area. Most structures dip subvertically although local areas of low-dip fabric are observed (Oosterman 2017, AR 2.58383)

The BGB consists of six fault-bounded belts, three metavolcanic and three metasedimentary, all trending east (Smyk *et al.*, 2005). Smyk *et al.* (2005) purpose the belts to represent rock packages of tectonic thrust slices, or accretionary wedges. The southern metavolcanic belts are dominantly mafic, tholeiitic, massive, and pillowed flows, and are intruded by concordant, synvolcanic gabbro bodies. Lesser intermediate to felsic volcanics and volcanoclastics are common in the central and northern belts. The southern metasedimentary belts are characterized by clastic sequences of feldspathic and quartzofeldspathic sandstones of turbidite facies (Kresz and Zayachivsky, 1993).

Polymictic conglomerate and banded iron formations are also common in the Property claim blocks. Several large granodiorite, diorite, and quartz diorite synvolcanic intrusives exist on the Property claims and are regarded as important factors in gold re-distribution and concentration in the Geraldton area. Middle to Late Proterozoic diabase dykes post-date the granitic intrusions and crosscut all other rocks. Dykes occur as sets that strike northeast and northwest and range in thickness from 10 to 15m. Dykes are offset and terminated by numerous faults in the area (Amukun, 1984).

Regional shear or deformation zones occur along large lateral faults, typically striking east- west between terrain boundaries, such as the Paint Lake Fault. The Paint Lake Fault is a regional dextral transcurrent fault that separates the BGB from the Onaman - Tashota greenstone belt. In the eastern portion of the BGB, the Paint Lake Fault system may join with the dextral transcurrent Klob Lake Fault, which extends over the Property area. Splays (both east-west and northwest to northeasterly striking) are common suggesting regional-scale fault systems. Rocks within shear zones are typically strongly sheared and or brecciated, commonly with strong carbonate + siliceous alteration. Localized shearing is common at contacts between gabbro/mafic and the more competent felsic intrusives. Northeasterly faults are also common in the Property claim blocks.

7.2 Property Geology

In the Property area, the Titan Gold Showing is located approximately 300 m north of the regional east-west striking Klob Lake fault at the intersection of a set of northeasterly and northwesterly striking faults (Figures 15-18). The Klob structure is inferred to continue southeast around Morrow and Tomorrow Lakes and along the northern contact between a synvolcanic diorite body and gabbro/mafic volcanic rocks. Northwest trending faults dominate the Titan showing area and may offset rock units towards the south by 150 m to 700 m.

The local geology surrounding the Titan Showing is defined by block faulted mafic volcanics +/- volcanoclastics and gabbro dykes and sills. These units trend approximately east-west and are commonly terminated, or are offset, by the northeasterly trending faults. Some of these faults have been intruded by strongly magnetic diabase dykes. A large diorite body or stock intrudes the metavolcanic belt at Tomorrow Lake. The metavolcanic belt hosting the Titan Showing is underlain by the Southern Meta-Sedimentary Belt (SMB) of dominantly sandstone and slates and includes broadly folded iron formation units. The contact between the volcanic rocks and the SMB has been interpreted as a thrust fault.

The mineralogy of the rocks surrounding Titan showing suggests a metamorphic facies grade of upper greenschist to lower amphibolite as determined by the presence of both a greenschist facies assemblage of chlorite + albite + epidote +/- actinolite and an amphibolite mineral assemblage of hornblende + plagioclase +/- epidote, biotite, diopside, although retrograde metamorphism of amphibolite to greenschist is possible (Report 20013940).

7.3 Mineralization

In the Klotz Lake region, gold mineralization is dominantly hosted within shear zone structures associated which splays off the regional Klob Lake fault structure. To date, the highest gold assays, in the multiple g/t Au range, have been returned from quartz and quartz- carbonate veined gabbro intrusive rocks and to a lesser extent in granodiorite and mafic volcanic rocks. There are various shear hosted high grade gold mineralization occurrences on the Property, out of which most important are: the Titan and Tomorrow Lake showings (Figure 18) are discussed below:

The Titan Showing

The Titan showing was discovered by Goldstream in the fall of 2011. Here, the highly deformed and quartz veined volcanic/gabbro rocks contain visible gold with initial grab samples returning gold assays of 11,200 g/t Au, 5,900 g/t Au and 3,420 g/t Au. The showing consists of sporadic outcrop exposures covering an area measuring roughly 60 m north-south by 20 m east-west.

Visible gold is associated with strongly deformed quartz veins within sheared fine-grained mafic volcanic and gabbro rocks. The visible gold occurs as splashes and specks in associated with quartz vein fracture-fillings. The showing represents a multiple vein system with at least four gold-bearing veins. These veins are typically comprised of granular smoky grey quartz with strongly sheared and gossened wallrock along their contacts. The veins frequently displayed strong parasitic folding and canoeing, as well as augen-type shear structures. In addition to visible gold, the veins host a variety of sulphide minerals including pyrite, chalcopyrite, arsenopyrite, galena and molybdenite.

Tomorrow Lake Showing

The Tomorrow Lake Showing is located proximal to the contact between mafic volcanic/gabbro rocks and a large diorite stock (Figure 4). In 1983, Banque Or's best drill hole BO-83-34 returned 7.91 g/t over 5.12 m (Table 4). Gold mineralization is hosted at the shear contact between a strongly sheared chlorite + carbonate altered mafic volcanic/gabbro (2% 'bleby' pyrite clusters) to the north and a weakly sheared strongly silicified + epidote altered + oxidized diorite stock hosting 8 - 10% pyrite disseminations in the south. The hostrock is 5% quartz stockwork veined. Shearing penetrates all rock types. The showing is bounded on the east and west ends by northeasterly fault structures.

Figure 15: Regional geology map of Beardmore – Geraldton Greenstone Belt


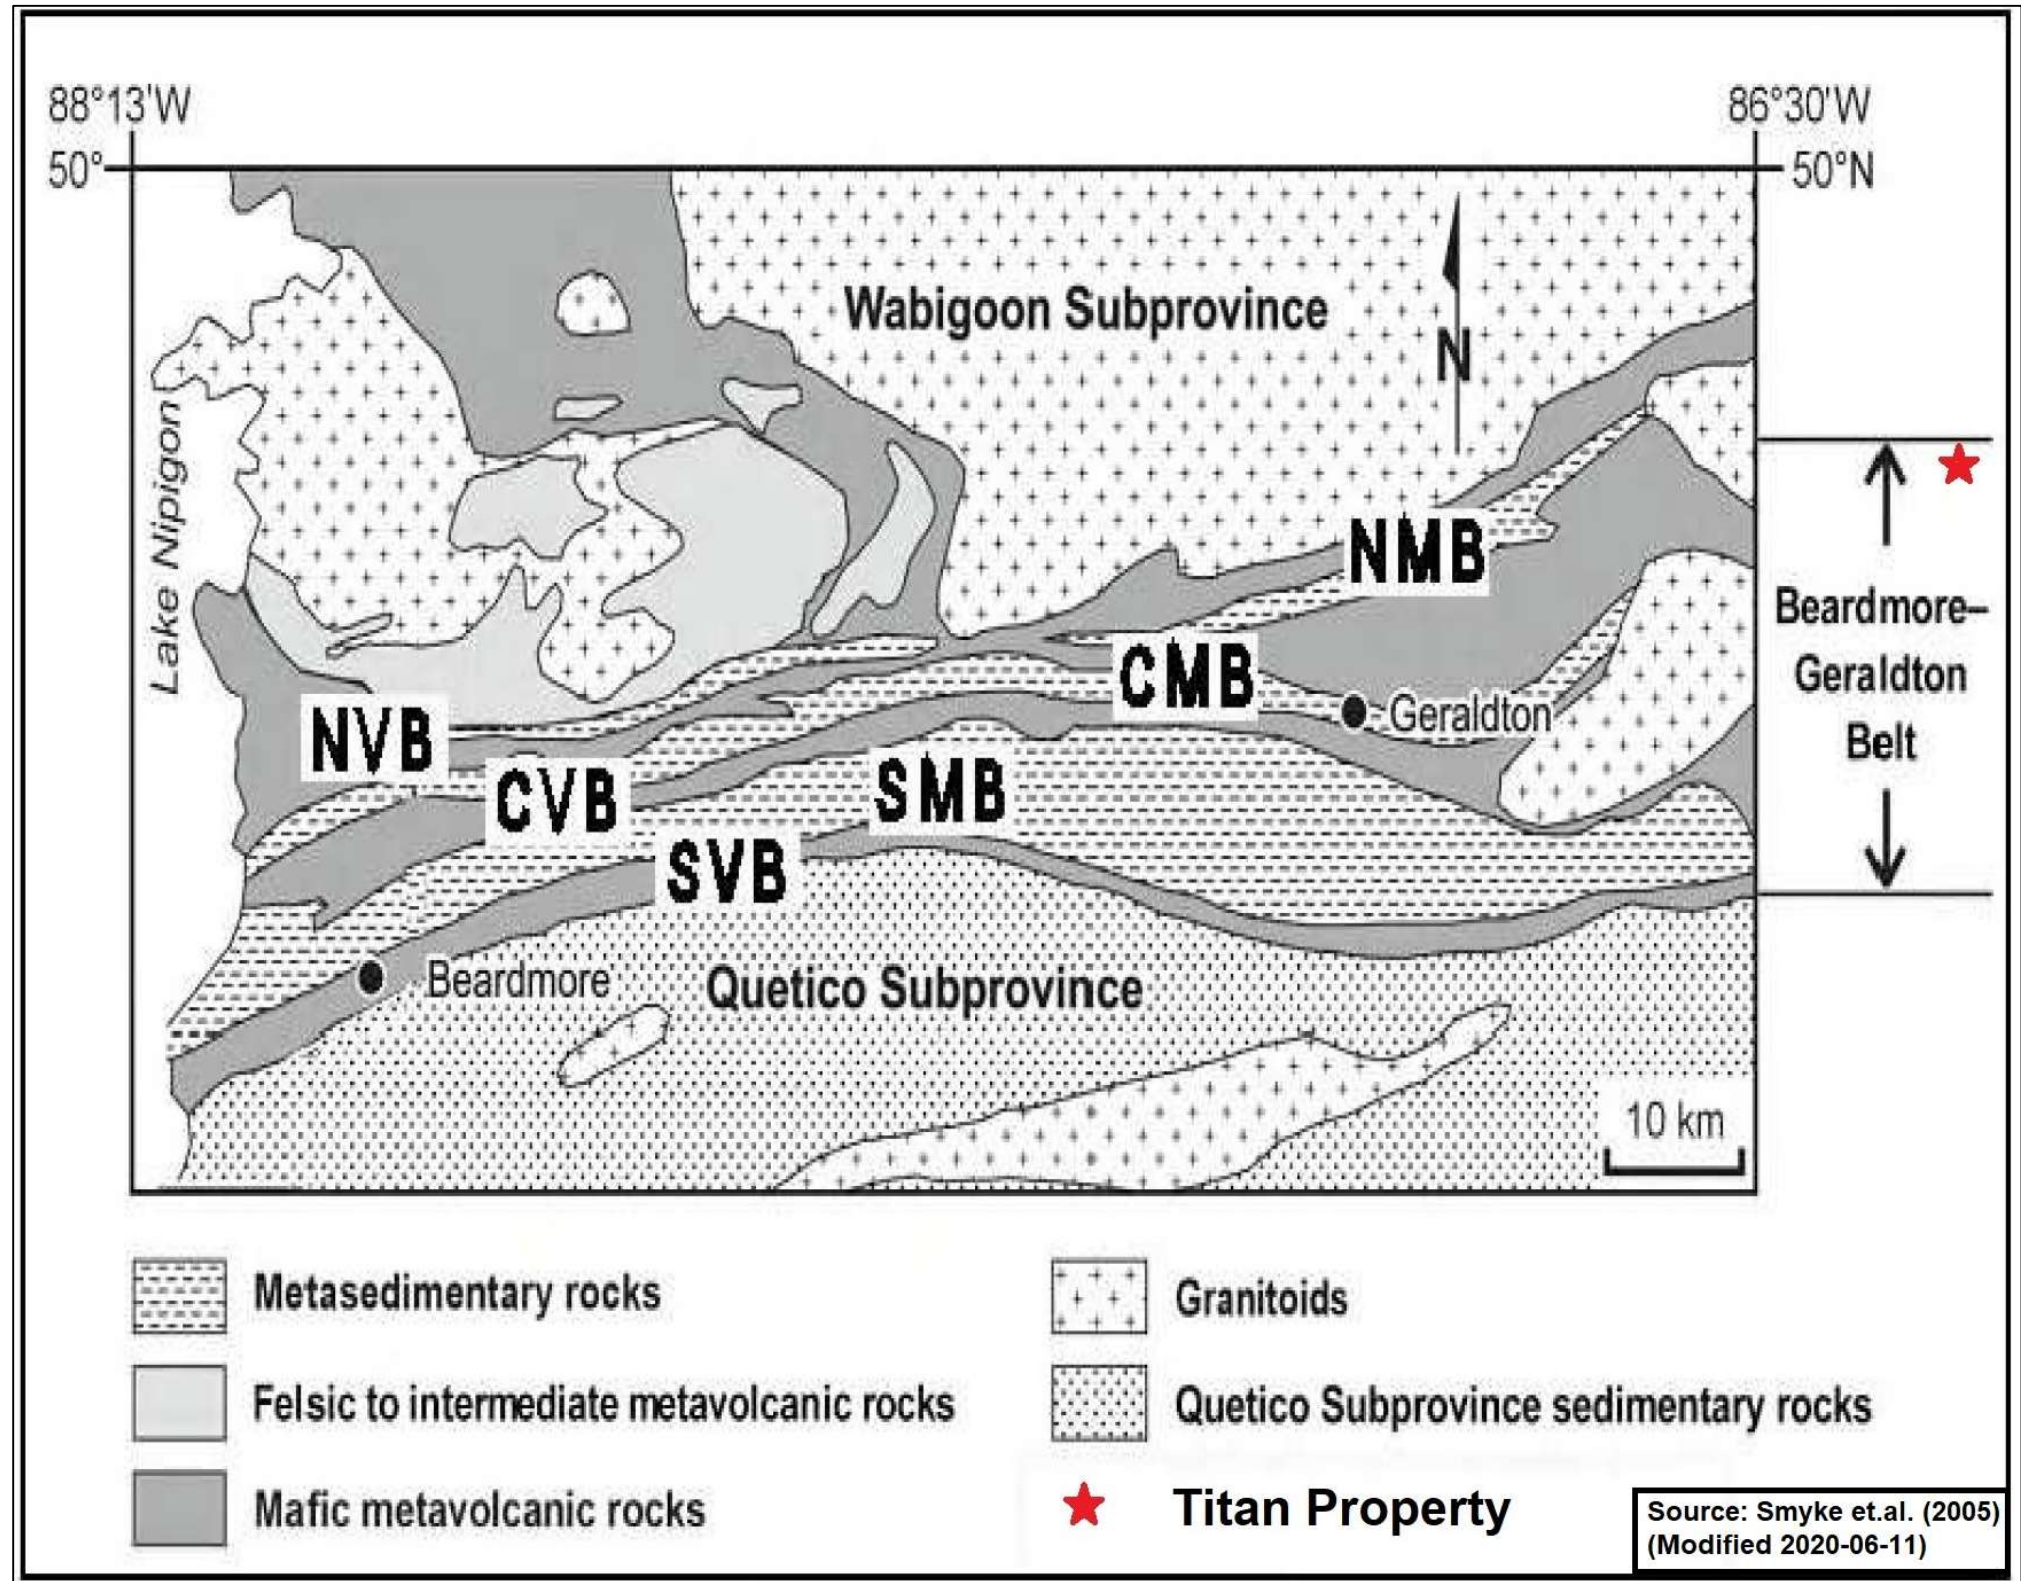



Figure 16: Regional Geology map

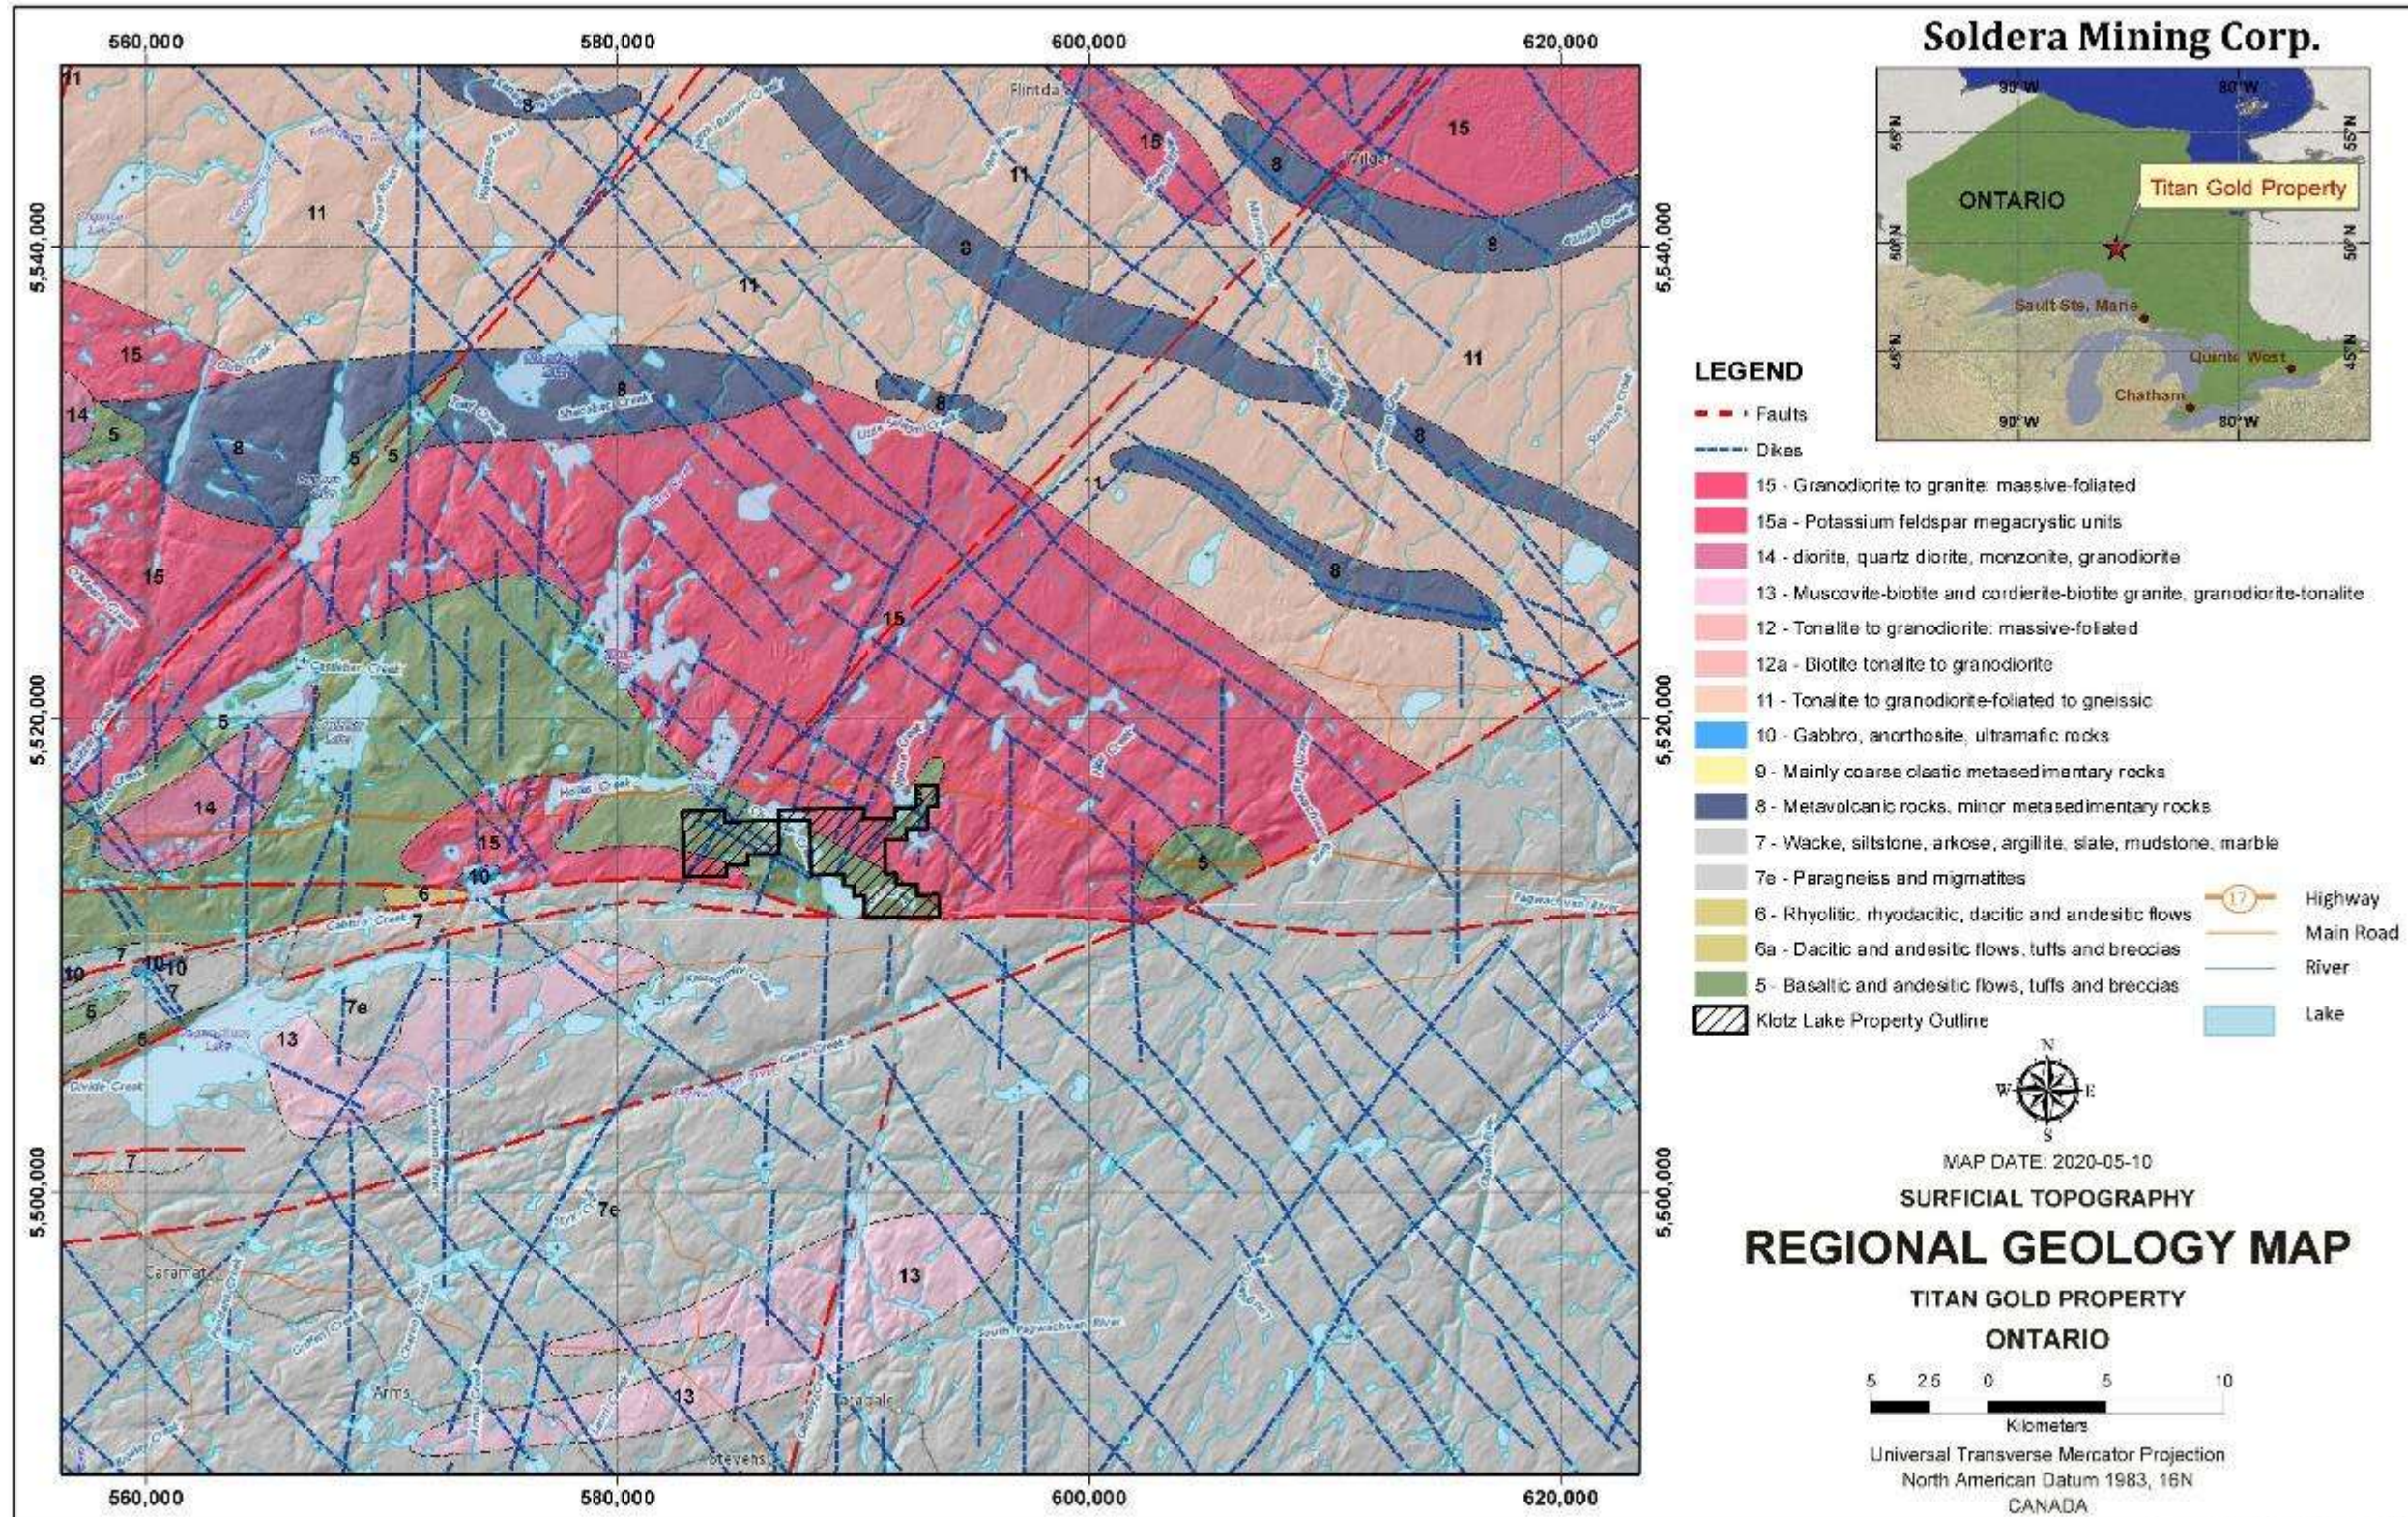

GEOLOGY: Bestrock Geology of Ontario (MRD126). Ontario Geological Survey, 2011. A seamless vector dataset based on the 1:250,000 scale map of bestrock geology of Ontario.

Prepared by: Shahab Tavakoli, P.Geo.


Figure 17: Property Geology Map

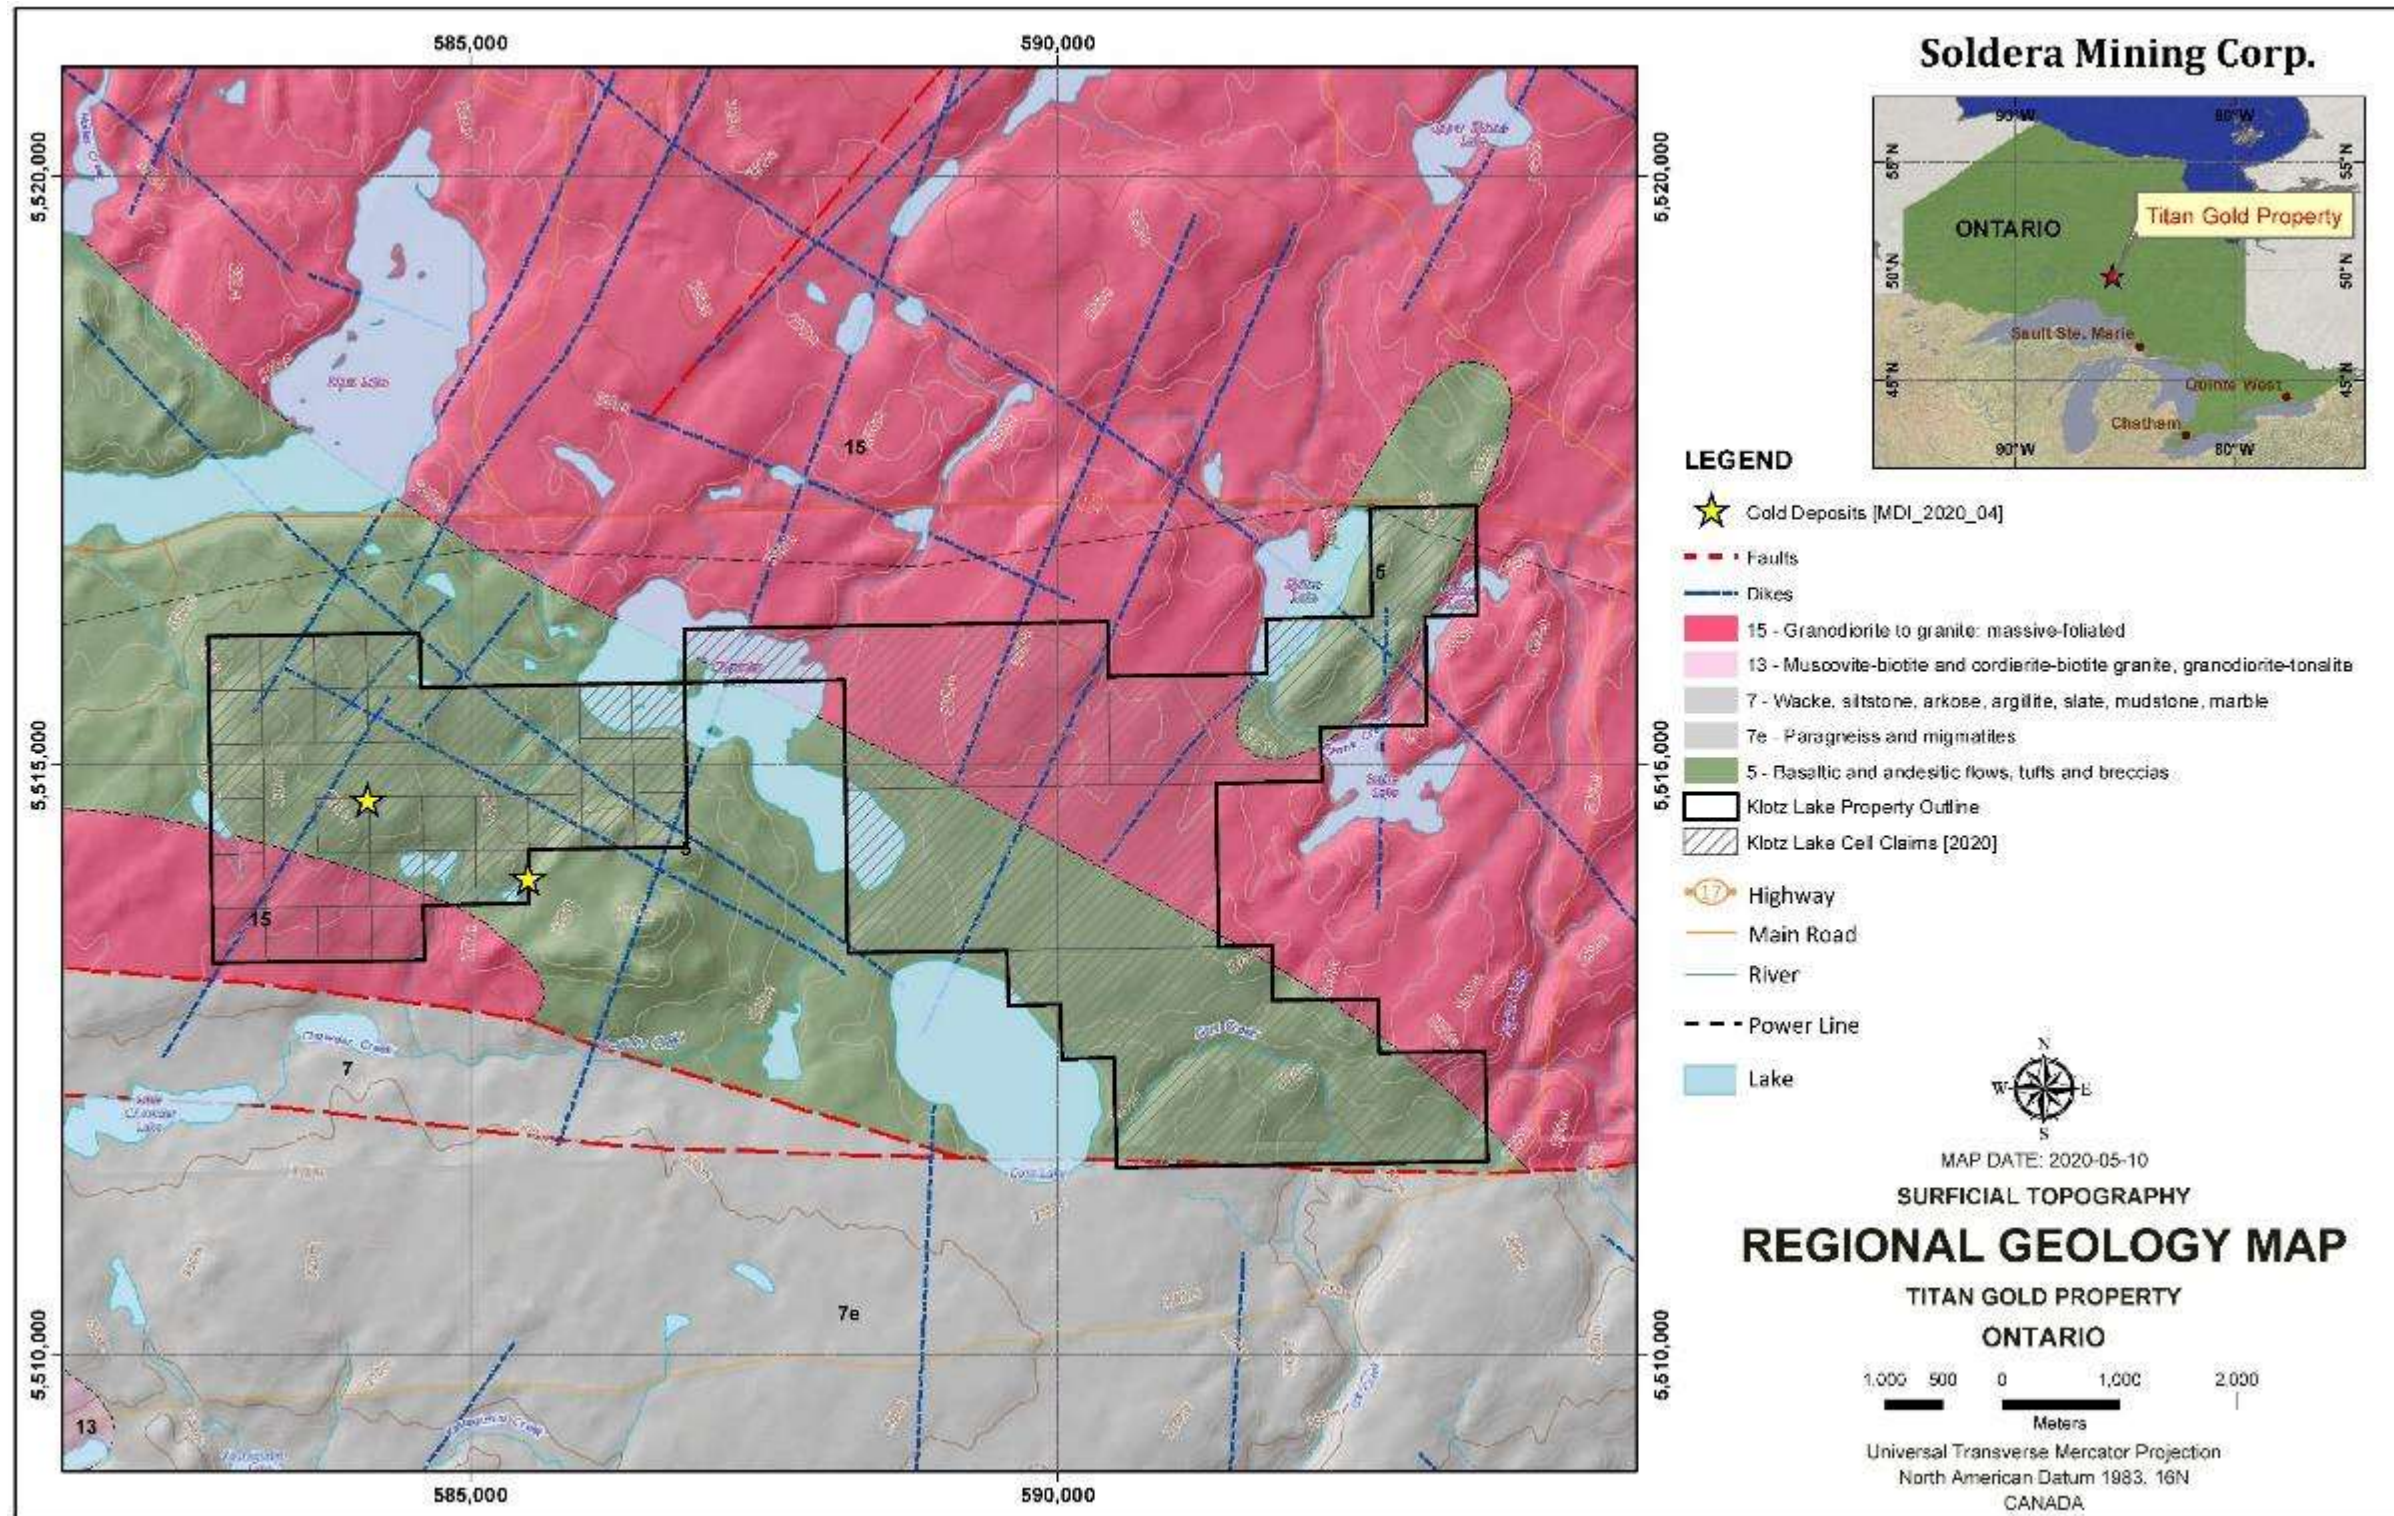

GEOLOGY: Bedrock Geology of Ontario (MRD126), Ontario Geological Survey, 2011. A seamless vector dataset based on the 1:250,000 scale map of bedrock geology of Ontario.

Prepared by: Shahab Tavakoli, P.Geo.

Figure 18: Property geology map with historical Solarus Grid

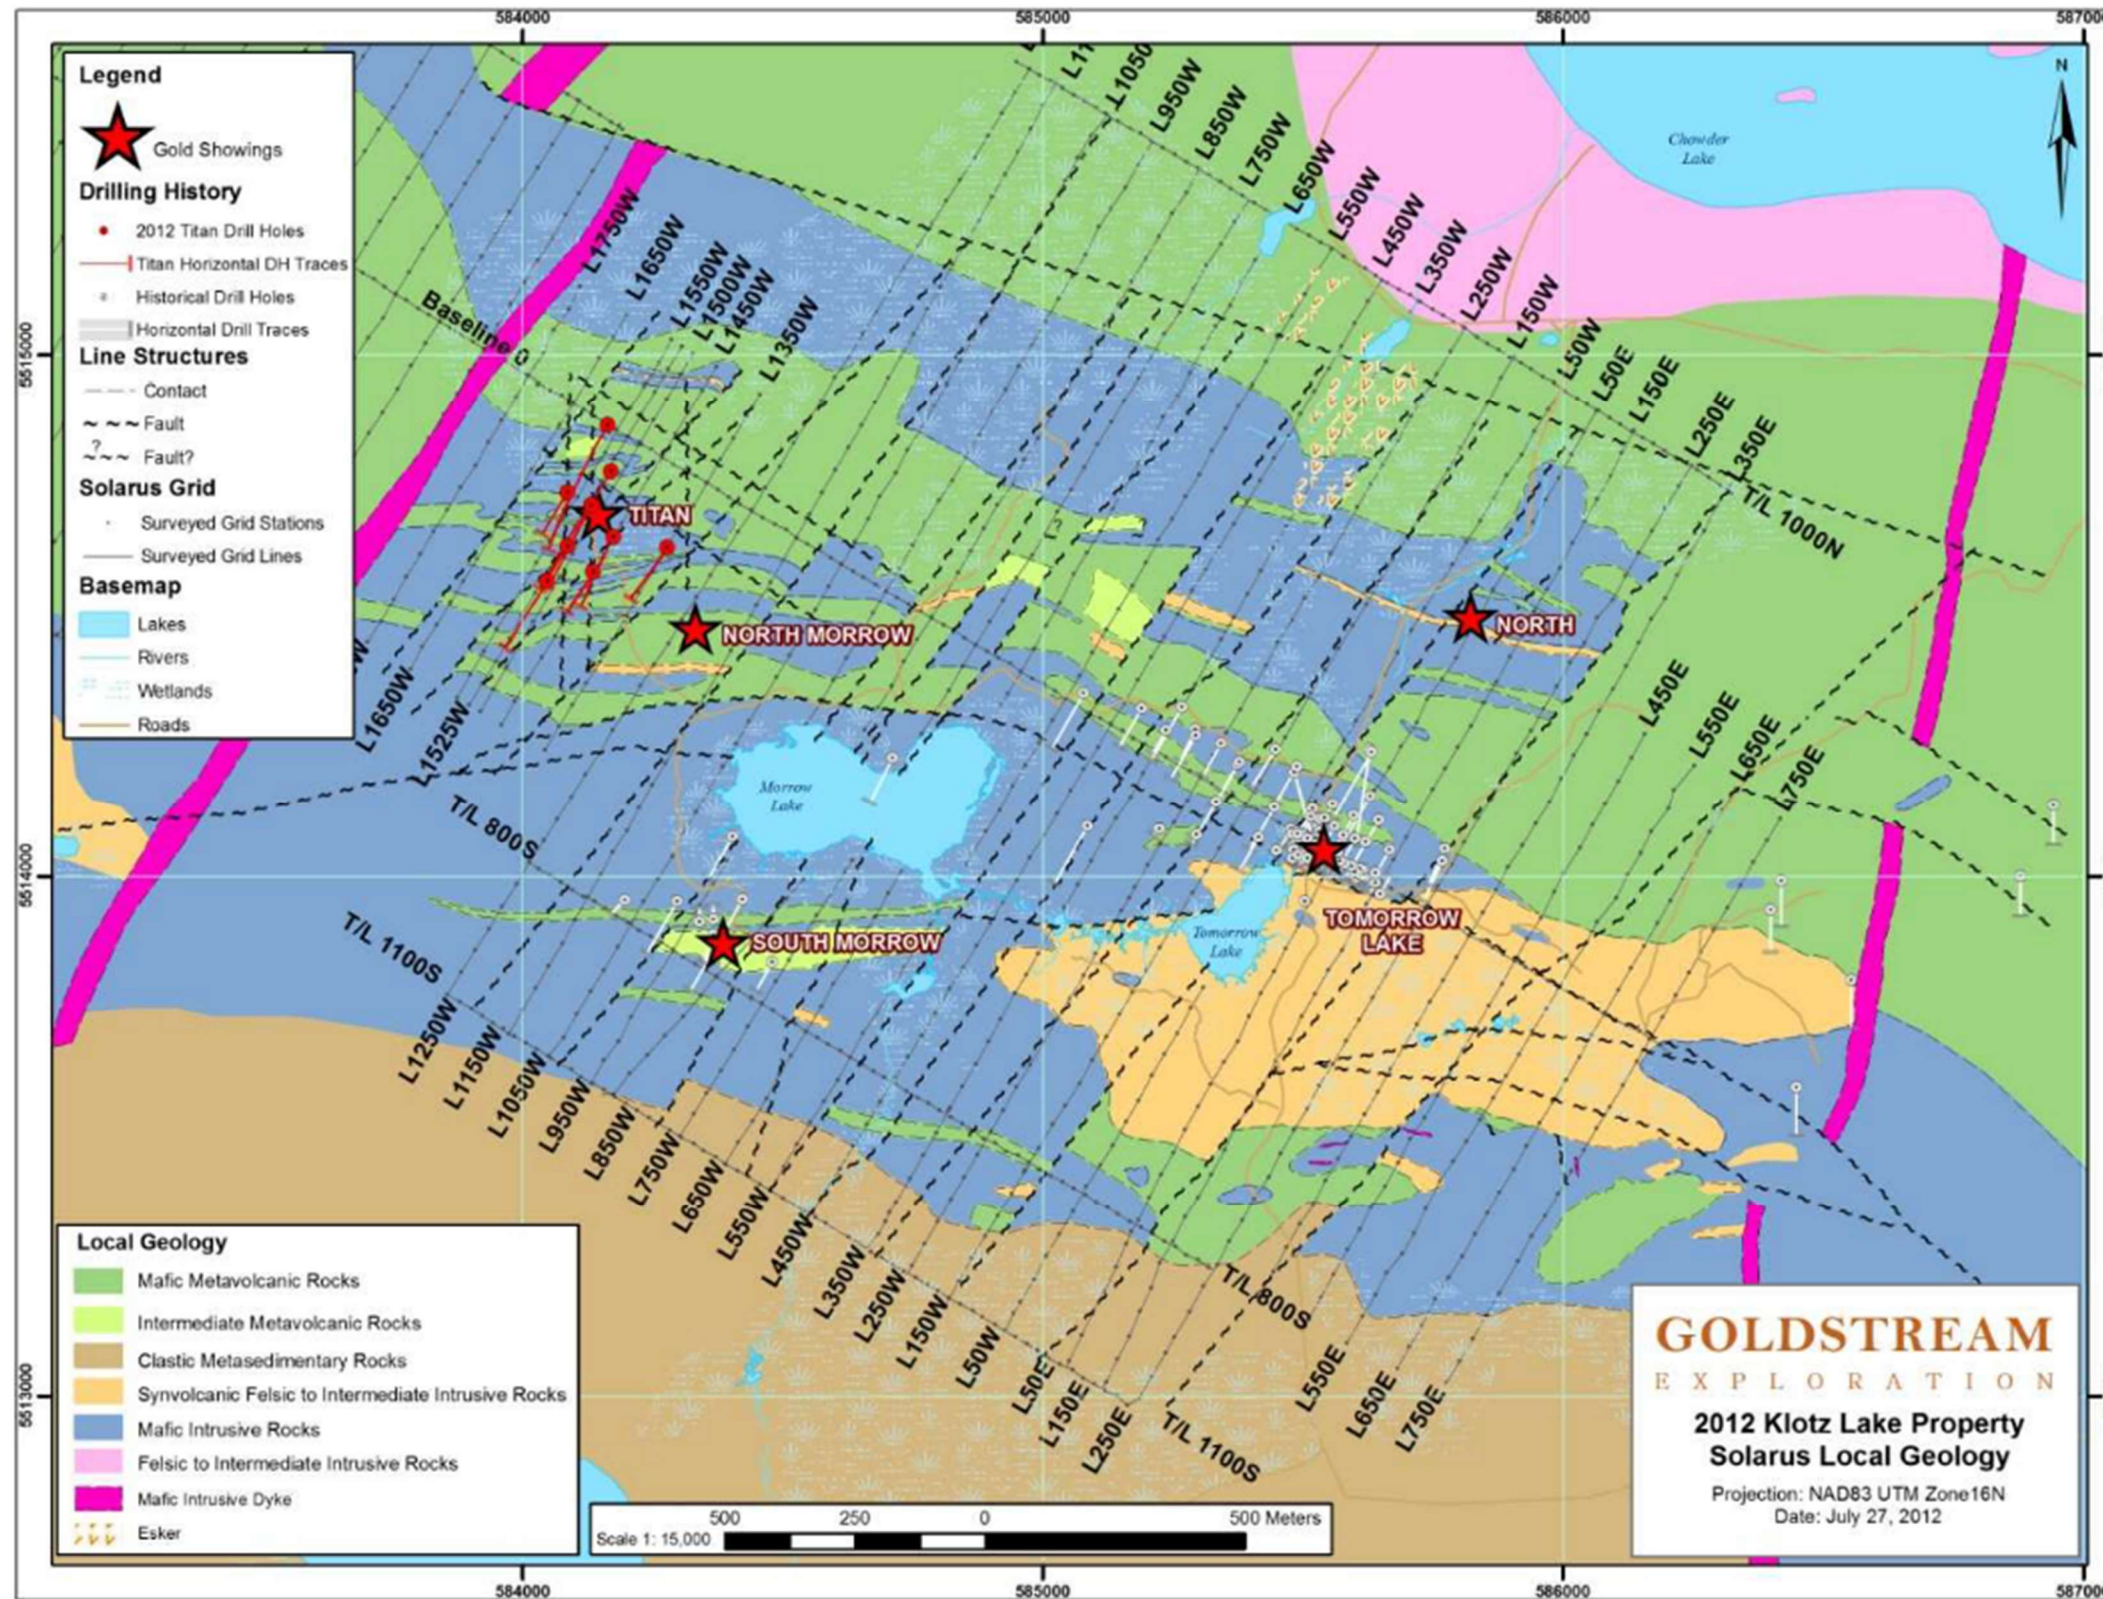

(Source: Assessment Report 20013940)

8.0 DEPOSIT TYPES

The Superior Province is the largest exposed Archean craton in the world which is known for its gold deposits. Mineralization style for Property suggests a lode type Mesothermal Archean Lode Gold deposit model.

One prominent characteristic of all significant gold deposits in the Superior Province is their occurrence within or immediately adjacent to greenstone belts. They are not, however, preferentially hosted by a specific greenstone lithology or lithological assemblage but occur within all greenstone lithologies. A second, equally prominent, characteristic of the gold deposits is their occurrence within major tectonic zones which comprise linear composite shear systems. These shear systems, or deformation zones, are commonly of regional extent, exhibit systematic orientations and sense of shear, and may truncate all Archean lithologies (Colvine A.C. et. al. 1988). The faults, and associated splays, which control gold mineralization, are typically part of a larger deformational zone that can reach kilometers in thickness and several hundred kilometers in strike (Hodgson, 1993). Structural and stratigraphic continuity are locally completely disrupted by late shearing, associated with the major deformation zones. Locally, gold mineralization at the Property scale is more controlled by regional and local structures while lithology has little control. There are three types of gold mineralization identified in the area: (a) in quartz veins hosted in volcanic rocks and felsic dikes within shear zones, (b) in narrow semi-massive sulphide bands filling fissures, and (c) in altered rocks within shear zones with or without quartz veins.

Gold-bearing quartz veins are the most common type of mineralization in the area. The veins have wispy to well-layered “crack-seal” textures, with sericite, chlorite, ferroan carbonate, 1-5% sulphides, and occasionally tourmaline along the selvages. Gold is concentrated in the “crackseal” fractures and in selvages along the quartz vein margins. Calcite filled fractures within quartz veins also carry gold. Narrow gold-bearing semi-massive sulphide filled fractures within fissile zones also contain significant gold values. Pervasive ferroan carbonate alteration, disseminated sulphides, and very small barren quartz veinlets characterize the fissile zones. Sulphides are predominantly pyrite, with variable amounts of chalcopyrite. The gold tenor appears to be related to the quantity of pyrite present in the wall rock and in the veins.

The following controls of gold mineralization is identified in Ontario Ministry of Northern Development and Mines report “Archean Lode Gold Deposits in Ontario” (Colvine A.C. et. al. 1988).

A. Lithological Controls

1. Mafic and ultramafic volcanic and intrusive rocks have been suggested as preferred host rocks to gold.
2. Clastic metasediments host mineralization in a frequency approximately proportional to their belt-wide occurrence.

3. Felsic metavolcanic rocks have a somewhat higher incidence in the mineralized areas than within greenstone belts as a whole.
4. Chemical metasediments such as banded iron formations are only a minor proportion of greenstones and more frequently associated with economically poorer deposits.
5. The post-volcanic felsic plutons are minor in volume; however, these post-volcanic intrusions are very common in mineralized areas. In several deposits, gold mineralization is either completely (e.g. The Young-Davidson Mine at Matachewan) or predominantly (e.g. the Macassa Mine at Kirkland Lake) hosted by felsic to intermediate, silica-saturated to undersaturated intrusions which cut the folded and tilted supracrustal package.

B. Structural Controls

1. **Zones of anomalously high strain within a deformation zone.** Examples include the mines of the Red Lake and Hemlo camps and the Detour Lake and Macassa Mines in Ontario, and the Sigma Mine at Val d'Or in Quebec. Both brittle (fracture and breccia vein systems) and ductile (replacement vein systems) deformation styles are recorded in these deposits, perhaps reflective of the depth in the crust at which they formed.
2. **pre-existing structural anisotropies.** An excellent example of this control of mineralization is the Cameron Lake deposit near Titan, in which the mineralization occurs where sympathetic, bedding-controlled splays to a shear zone intersect that shear. The plunge of the ore zone parallels the lineation formed by the intersection of the shears.
3. **a preferred lithology, where a strong competency contrast exists between adjacent rock types.** Structurally more competent lithologies can be preferentially mineralized. Examples include ore zones in the Macassa and Sigma Mines and the Duport deposit on Lake of the Woods, in which felsic intrusive rocks contain more mineralization than surrounding, less competent lithologies. The competency difference may be a result of original lithological differences or may result from alteration processes. The later control is displayed in the Dome Mine at Timmins and the Cochenour-Willans Mine at Red Lake, where metasomatic ankerite - rich units were more competent than enclosing lithologies and deformed in a brittle manner.
4. **fold limbs and fold noses.** Folding of sequences of rocks of contrasting thicknesses and competencies has long been known to create permeable zones that may host mineralization. Other folding - related surfaces (e.g. between layers in fold limbs, or an axial planar cleavage) may also be preferred sites for mineralization, "Saddle reef gold deposits in fold noses have long been known. Examples of this control of mineralization in Ontario include ore zones at Geraldton (Colvine *et al.* 1984) and the Musselwhite deposit at Opapimiskan Lake (Hall and Rigg 1986), where gold is hosted in fold noses and foliation - parallel veins. Many of the lode gold deposits contain an apparently complex assemblage of gold - bearing veins. However, the

- types of veins, their orientations, and the temporal relationships that they display can be explained in terms of the deformation processes under which they formed.
5. **Gold - bearing veins include replacement, extension, breccia, and fracture types.** In most cases, veins transect lithological contacts, and are not restricted to a specific rock type. However, veins may be stratabound where they are controlled by the competency or chemistry of a particular unit. Such is the case at Geraldton, where veins occur largely in layers of iron formation (Macdonald 1984a).

9.0 EXPLORATION

Soldera has not carried out any exploration work on the Property.

10.0 DRILLING

No drilling has been done on the Property by Soldera.

11.0 SAMPLE PREPARATION, ANALYSES AND SECURITY

The author visited the property on May 23, 2020. A total of six grab samples were collected by the author from historical channel sampling and other exploration areas. All samples were under the care and control of the author. The samples were bagged and tagged using best practices and were handed over personally to Polymet Labs in Cobalt, Ontario for sample preparation and analyses. Polymet is a commercial, accredited ISO Certified Laboratory independent of Soldera and Pleson Geoscience (the Vendor). No officer, director, employee or associate of Soldera or Pleson Geoscience was involved in sample preparation and analysis.

11.1 2011-12 Drill Core Samples Goldstream and Prodigy

All drill core from 2011-12 was selected and sent for logging and sampling. Sample lengths, although often 1.0 m in length on average, were set up by the geologist based on lithology and mineralization, veining, and alteration. The core was split down the centre using a diamond-edge table rock saw. The bottom half was sent to the lab for assay and the top half returned to the core box for future reference. The core handling, splitting, and bagging was supervised by the drill geologist(s).

All split core samples were bagged in plastic sample bags and sample number written on the bag with black permanent marker. The bags are then secured with plastic security ties and placed in rice bags. The split samples are temporarily stored in the locked and secured core shack at Bush Lake until they can be shipped to the laboratory. Once the splitting was completed for a hole, the sample submission paperwork was filled out by the geologist on site. The samples were transported by Goldstream personnel to Activation Laboratories ("Actlabs") sample preparation facility and assay lab in Geraldton for gold analysis (method 1A3-50) by 50 gm Fire Assay/gravimetric finish. A 36 Multi-element

analysis was completed on selected samples at the Actlabs located in Thunder Bay (method 1E3). Activation Laboratories is an independent group of laboratories accredited by the Standards Council of Canada to ISO/IEC 17025 guidelines for gold analysis.

A total of 2,846 core samples were taken for analyses during the drill program; samples included split cores, Canadian Standards, coarse and powdered blanks. At the completion of the 2012 diamond drilling program, Goldstream dispatched a total of 282 pulp samples, or approximately 10% of the total samples taken, from Actlabs in Geraldton to Accurassay in Thunder Bay for gold assay verification. Accurassay is an ISO certified laboratory. The sample pulps were sent directly from Actlabs to Accurassay. Each sample was assayed for gold only (Assessment Report #20013940).

11.2 Samples from Other Exploration Work

The samples for the 2010, 2011-12, 2016 to 2020 exploration work were also analyzed at Activation Laboratories (ACTLABS) in Thunder Bay, Ontario. The procedure for Fire Assay and ICP-OES is described below:

Fire Assay

A sample size of 5 to 50 grams can be used but the routine size is 30 g for rock pulps, soils or sediments (exploration samples). The sample is mixed with fire assay fluxes (borax, soda ash, silica, litharge) and with Ag added as a collector and the mixture is placed in a fire clay crucible, the mixture is preheated at 850°C, heated at an intermediate 950 °C and finished at 1060 °C. The entire fusion process should last 60 minutes. The crucibles are then removed from the assay furnace and the molten slag (lighter material) is carefully poured from the crucible into a mould, leaving a lead button at the base of the mould. The lead button is then placed in a preheated cupel which absorbs the lead when cupelled at 950°C to recover the Ag (doré bead) + Au.

ICP-OES

The Ag doré bead is digested in hot (95°C) HNO₃ + HCl. After cooling for 2 hours, the sample solution is analyzed for Au by ICP-OES using a Varian 735 ICP.

Code 1A2-ICP (Fire Assay-ICP-OES) Detection Limits (ppb)

Element	Detection Limit	Upper Limit
Au	2	30,000

Source:

<http://www.actlabsint.com/page.aspx?page=1454&app=226&cat1=549&tp=12&lk=no&menu=64>

Samples from 1986 drill program were analyzed for gold by Fire Assay at Bell-White Analytical Laboratories Ltd. of Haileybury, Ontario, Canada.

11.3 Author Collected Samples

The samples collected by the author during his May 23rd, 2020 visit were prepared and analyzed at Polymet Labs in Cobalt, Ontario, which was formerly established by the Ontario Ministry of Mines and Northern Development (MNDM). The samples were assayed using Fire Assay package for gold and silver (50 g, Fire assay, AAS finish). The laboratory is an independent Canadian certified lab.

In Conclusion, the author considers that the sample preparation, security, and analytical procedures of historical and current sampling are adequate to ensure credibility of the assays. The QA/QC procedures and protocols employed during historical work are sufficiently rigorous to ensure that the data are reliable.

12.0 DATA VERIFICATION

The author visited the Property on May 23, 2020 to verify historical exploration work including trenching and drill programs, to examine mineralized outcrops and to collect necessary geological data. During the visit of the Property, GPS coordinates using NAD 83 datum were recorded for the drill hole casing and trench location.

A total of six samples were collected by the author from historical channel sampling and other exploration areas (Figure 19, Table 10) and were delivered to Polymet Laboratories in Cobalt, Ontario for analyses. All samples were under the care and control of the author and are considered representative.

The sample assay results (Table-10) indicated gold (Au) values in the range of 0.057 grams per ton (g/t) to 4.03 g/t while one sample (31523) was below laboratories detection limits (0.028 g/t). Highest Silver values of 26.31 were in sample 31518 and the lowest 1.3 g/t was sample 31523 while four samples were below the laboratories detection limits. These results are consistent with historical trenching results.

Overall, the author is of the opinion that the data verification process demonstrated the validity of the data and considers the Property database to be valid and of sufficient quality.

Historical exploration work from 1980s, 2011-12 Goldstream and Prodigy, and 2017-2020 by Pleson Geoscience was carried out under the supervision of professional geologists. No officer, director, employee or associate of Soldera was involved in sample preparation. The author was able to verify location of historical channel sampling areas during his Property visit. A limited search of tenure data on the ENDM Ontario website on May 20, 2020, conforms to the data supplied by Soldera. However, the limited research by the author does not express a legal opinion as to the ownership status of the Property.

Historical grades and assay data are taken from ENDMF assessment reports and OGS geological reports which are deemed reliable. Historical geological descriptions taken from different sources were prepared and approved by the professional geologists or

engineers and are deemed reliable.



Photo 1: Titan showing looking NW (May 23 Property visit)



Photo 2: Historical drill core (May 23 Property visit)



Photo 3: Taking verification sample along historical channel cut (May 23 Property visit).


Field description and results of samples collected during the Property visit is provided in the following table.

Table 10: Sample description from May 23, 2020 Property visit

Sample ID	Easting	Northing	Description	Au (ppm) g/t	Ag (ppm) g/t
31518	584130	5514684	Grey rusty quartz vein (taken between old sample tag 61634 and 61636)	1.93	26.31
31519	584127	5514687	Sugar textured quartz veining (taken near tag 60597)	1.93	<0.028
31520	584113	5514700	Grey rusty quartz vein (taken in middle of 4 tags C-62084-c62083 top and C-62098-C62096 bottom)	0.11	<0.028
31521	584108	5514703	Sulfide dark alt volc. (taken in middle of C62080-C62079)	0.057	<0.028
31522	585113	5514308	Dark met volc sulf take on middle of trail (old sample 46774)	4.03	<0.028
31523	585311	5514286	Dirty quartz in middle of bulldozer trail (old sample 33540) this would be good place to wash off outcrop	<0.028	1.3

The data collected during the present study is considered reliable because it was collected by the author. The data quoted from other sources is also deemed reliable because it was carried out under the supervision of professional geoscientist and geophysical contractors and taken from ENDM Ontario, published reports by the Ontario Geological Survey (OGS), the Geological Survey of Canada (“GSC”), various researchers, and personal discussions.

Figure 19: Location of samples collected by the Author

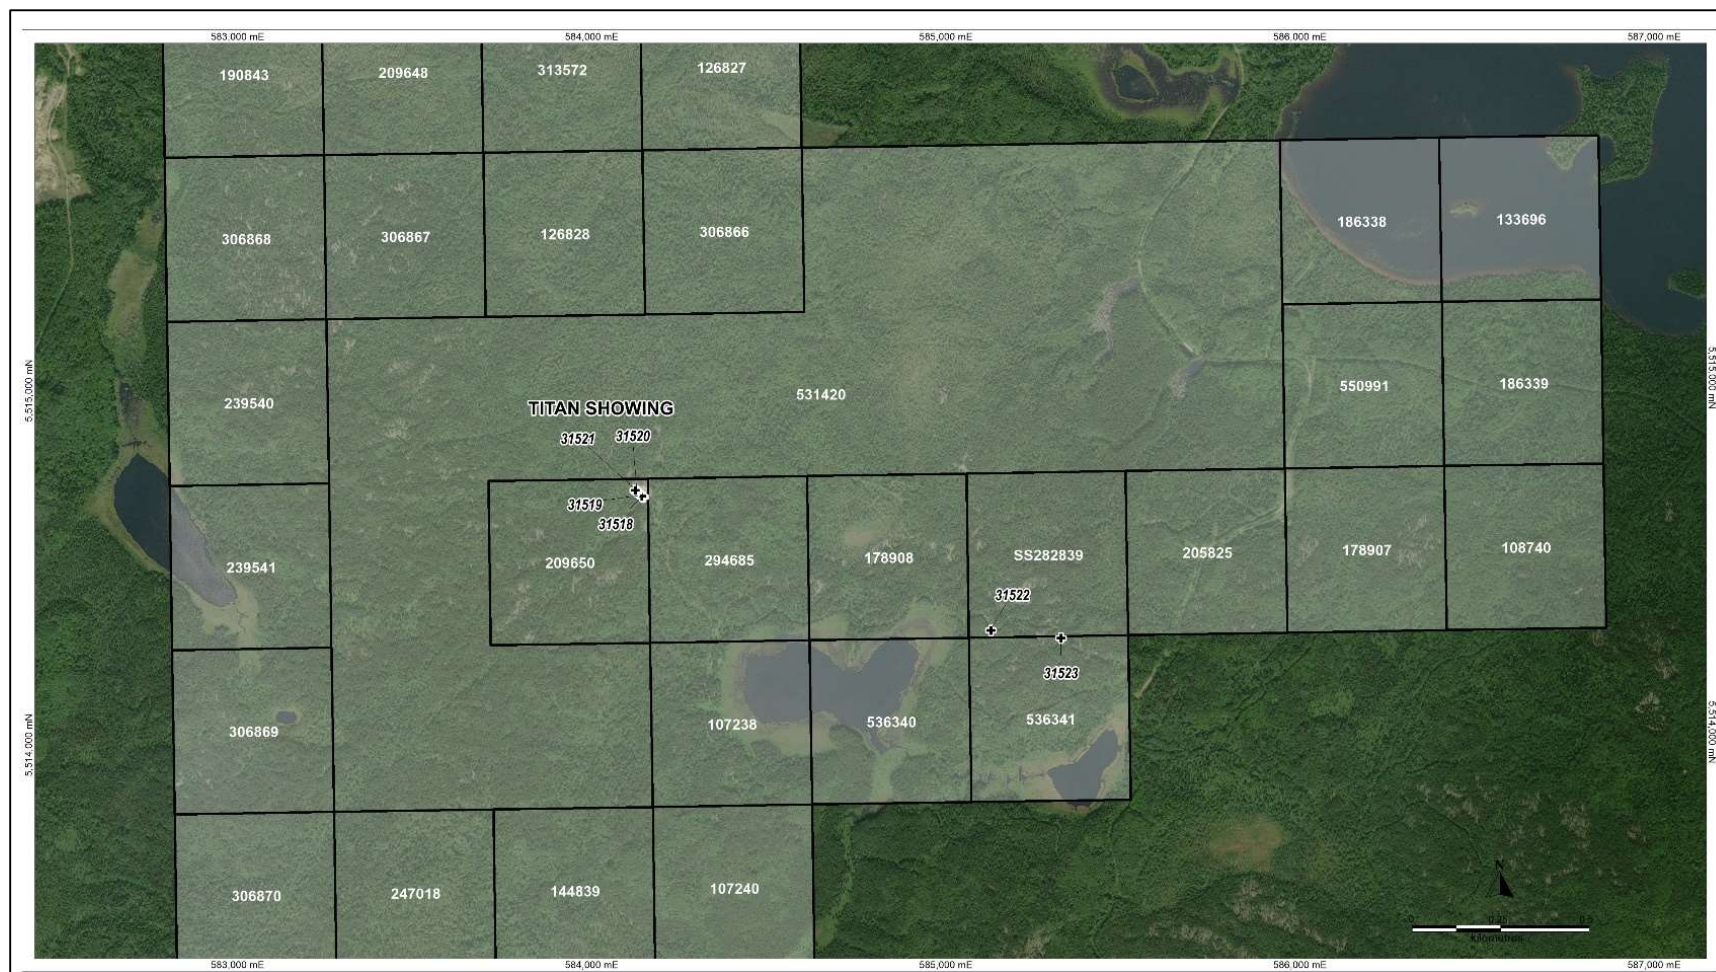

13.0 MINERAL PROCESSING AND METALLURGICAL TESTING

No metallurgical testing was done on the Property by Soldera.

14.0 MINERAL RESOURCE ESTIMATES

No mineral resource estimates were done on the Property by Soldera.

Items 15 to 22 are not applicable at this time.

23.0 ADJACENT PROPERTIES

Titan Property is located in the heart of the mineral rich Canadian Shield, on the western edge of Northwestern Ontario, in close proximity to Manitoba to the east and Ontario's Ring of Fire to the west. In Ontario there are several mines and exploration projects that are in close proximity to the property (Source: <http://business.Titan.ca/key-industries/mining/>).

The Property is located in an active and historical mining and mineral exploration region where many operators carried out exploration and/ or development work on the Property and the surrounding area. The following information is taken from the publicly available sources which are identified in the text and in Section 27. The writer has not been able to independently verify the information contained. The information is not necessarily indicative of the mineralization on the Property, which is the subject of this technical report.

Cautionary statement: Investors are cautioned that the mineralization located on the adjacent properties may not be indicative of the potential mineralization on the Property. It has been provided only for illustration purposes.

23.1 Prodigy Gold's Hardrock East Project

Prodigy Gold is the owner the adjoining land which is known as Hardrock East Project. The Hardrock East Gold Project consists of a land package totaling approximately 200 square kilometres covering the eastern portion of the Beardmore-Geraldton gold camp in Northern Ontario. The land position includes claim blocks known as Milestone, Adel and Klotz Lake. In October of 2011, Goldstream entered into an agreement with Prodigy which allowed Goldstream, through various financing and work commitments, to acquire a 100% interest in the Hardrock East project. Prodigy Gold is now owned by Argonaut Gold Inc. which is listed on Toronto Stock Exchange (TSX-V: AR).

Exploration by Prodigy occurred mainly during 2010 and 2011 and included extensive geologic study and fieldwork. In December of 2012, Goldstream contracted AMEC to conduct a non-compliant resource estimate on the Milestone target. The resultant resource from this study was designated only as a mineral inventory with no economic parameters applied except for using varying cutoff grades. The zone of mineralization was modeled by Goldstream geologists and at a 0.4 g/t cut-off, AMEC determined that the

Milestone deposit contains a mineral inventory of 25.5 million tonnes grading 0.87 g/t gold for 710,713 ounces. In 2015, Argonaut acquired 100 % of the Hardrock East property. (Source: <https://www.argonautgold.com/English/assets/exploration/default.aspx>)

23.2 Greenstone Gold Mines Group Viper Property

Greenstone Gold Mines is a 50/50 partnership between Centerra Gold Inc. and Premier Gold Mines Limited for the joint ownership and development of the Hardrock, Brookbank and Viper Properties.

Greenstone Gold Mine GP Inc.'s Viper Property is a contiguous block of 17 mining claims. The property covers a total approximate area of 3,410 hectares and is located in the McBean Lake Area Township.

The Viper Property resides in a location of the Beardmore-Geraldton Greenstone Belt where the Central Meta-Volcanic Unit and the Southern Meta-Sedimentary Unit are strongly folded together. The central meta-volcanic unit is comprised of massive and pillowed basalts and andesite with mid-ocean ridge basalt geochemical affinity, interlayered with thin sedimentary and tuffaceous beds. The central meta-volcanic unit differs from the southern meta-volcanic unit by thicker deposits of pyroclastic rocks and an abundance of large amygdules in the flow rocks, suggesting shallow-water or subaerial volcanism (Kresz and Zayachivsky 1991). The majority of the flow rocks are andesites and dacites of calc-alkaline affinity with trace and rare-earth element patterns suggesting deposition in an emergent volcanic arc above a subduction zone (Tomlinson et al. 1996). There are also numerous young diabase dykes running roughly north-south crosscutting all other rocks. The southern meta-sedimentary unit is comprised of clastic and chemical sedimentary rocks.

Polymictic conglomerate occurs as thin horizons (<5m) within a thick sequence of thinly to thickly bedded feldspathic sandstone interlayered with thinly bedded siltstone and argillite. Banded iron formation, a minor component of the unit, occurs as fine magnetite-rich laminae and jasper-hematite beds within 3-30m thick horizons interlayered with thinly bedded green argillite, siltstone, and sandstone. In the middle of the folded southern meta-sedimentary unit there is a large felsic porphyry plug. The felsic porphyry body is folded and is only slightly younger than the surrounding clastic meta-sediments.

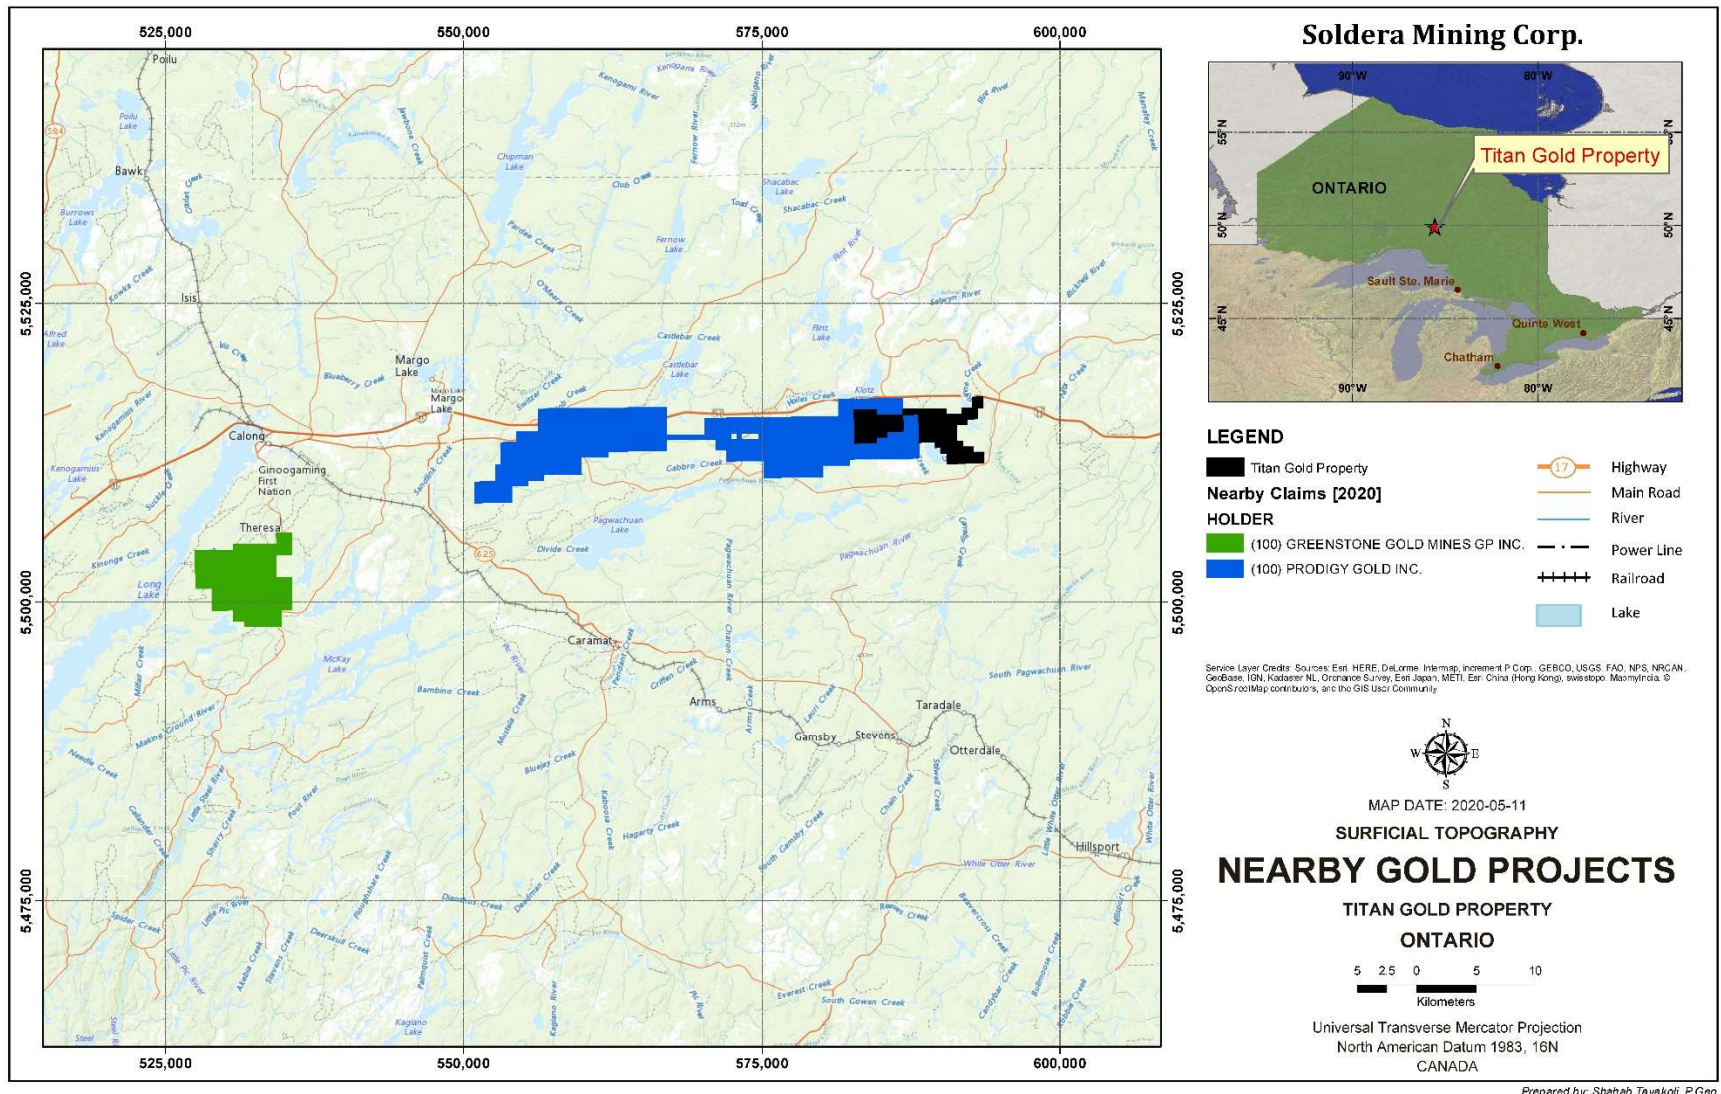


Figure 20: Adjacent Properties Map

24.0 OTHER RELEVANT DATA AND INFORMATION

24.1 Environmental Concerns

There is no historical production from the Property, and the author is not aware of any environmental liabilities which have accrued from historical exploration activity. An exploration work permit was issued for the Property in the name of Alex Pleson (the Vendor) which can be used for further exploration work by extending its time.

25.0 INTERPRETATION AND CONCLUSIONS

Geologically, the Property is situated in the Wabigoon Subprovince of the Superior Geological Province. This Subprovince consists mainly of Archean metavolcanic and metasedimentary rock sequences intruded by larger granitoid plutons, mainly granodiorite to granite in composition. Mafic volcanic rocks form ~90% of the sequence in the Titan area, typically tholeiitic mafic flows. Felsic-metavolcanic and metasedimentary units comprise the remainder of the volcanic-sedimentary lithologies. These units typically exhibit evidence of at least greenschist facies of metamorphism. Regional deformation tends to trend in the east/northeast direction which is also the direction of alignment of regional structures. Within the Property, area is dominated by a large quartz diorite intrusion that extends past its eastern boundary on contact to a tonalite pluton. The western contact of the quartz diorite consists of interlayered mafic and felsic metavolcanic rocks. Gold mineralization is typically associated near the boundaries of the major shear zones that have been previously mapped on the Property.

The historical exploration work suggests that the Titan and Morrow showings represent an exposed ductile shear zone, exposed to high stress and strain, with multiple narrow gold carrying quartz veins within the Morrow Lake Deformation Zone (MLDZ). Gold mineralization at Titan and elsewhere on the Solarus grid, is associated with splay faults emanating off the regional east- west striking Klob Lake Fault; a regional fault system that might act as the principal plumbing/conduit network for important gold bearing fluids throughout portions of the Beardmore-Geraldton Greenstone Belt.

High gold values are associated with quartz +/- carbonate stockwork veins, less just quartz veins and highly altered variably sheared mafic/gabbroic rocks. The shear zones range in thickness from 0.5 m to 30 m, cross-cut stratigraphy, and are oriented northwest / southeast. Wider auriferous zones are of lower grade, with sporadic, < 0.5 m wide, high grade shoots. Various drill programs tested potential for gold mineralization along a strike. It is also clear from the drilling that the stratigraphy dips shallow, not steeply north at around 50° north.

Drilling at Titan did not intersect gold mineralization immediately underlying the showing where visible gold was found in strongly folded narrow quartz veins. This would indicate that the vein system may dip in the opposite direction and the optimum drill direction

should have been grid north instead of grid south. The surface projection of the significantly mineralized zones from drilling also suggest that the high-grade mineralized zones may form canoe-shaped shear structures rather than simple linear shears indicating that the Titan mineralization has been strongly folded. Therefore, it is possible that the mineralization must fold or plunge to the east or west of the surface gold showings and, according to IP results, may reside at vertical depths in excess of 250 m.

Significant gold mineralized zones are typically <10.0 m wide although shear/altered zones with pyrite +/- pyrrhotite mineralization can be up to 30 m wide. Assay values for gold are typically over 1.0 g/t with high grade offshoots grading 61.80 g/t Au over a core length of 0.5 m (Hole KL-12-01) and 271.0 g/t Au over a length of 0.4 m (Hole KL-12-08). The exact depth of this mineralized system is unknown with the deepest best gold intersections occurring at a vertical depth of ~275 m (hole KL-12-05). No significant mineralization was intersected west of the Titan showing, and northwest striking fault defined by the IP survey.

In addition to folding, faulting (post and pre-mineralization events) may also add to the complexity of the exploration working model of the Property. According to the ground geophysical survey results, the resistivity and chargeability and magnetic anomalies that coincide with the Titan showing can be followed on strike east southeast to the Tomorrow Lake showing where gold mineralization has been previously drill tested. This zone appears to have been locally displaced laterally by a series of northeast trending faults. These observations imply that there is further potential to find additional gold mineralization within this structure for a minimum strike length of 1.675 km. The chargeability anomaly appears to continue widening to the west forming a semi-linear structure curving to the northwest, suggesting a continuation of the mineralization associated with Titan. The regional scale (1:20,000) airborne magnetics mirrors the chargeability anomaly suggesting a folded or semi-linear structure curving to the northwest. A combination of airborne magnetic, ground magnetic and IP survey results indicate a total strike length of this structure for a total of around 4.0 km within the MLDZ. The results of VLF / magnetic survey of 2020 have shown that the mineralization trend which was explored at Morrow Lake through drilling and trenching can further extends to the east along strike for approximately two kilometres.

To date, most of known mineralization discovered on the Solarus grid is closely associated with increased magnetic signatures. Pyrrhotite, locally up to 10 modal percent, was found in most of the shear zones intersected by the recent drill program which may account for the magnetic anomalies. Considering the magnetic anomaly appears to more closely coincide with the gold mineralization occurrences, it is possible that the magnetic anomalies may define exploration targets more accurately for future exploration programs. So far, IP and magnetic susceptibility over the west end do not show any explicit correlation, which may be due to a possible iron depleted nature of mineralized zones, if present. Furthermore, the fact that gold mineralized shear zones cross-cut

geological units suggests a structural control is more important in controlling gold mineralization than a lithological control.

Soldera has not carried out any exploration work on the Property.

Mineralization style for Property suggests a lode type Mesothermal Archean Lode Gold deposit model in Superior Geological Province. One prominent characteristic of all significant gold deposits in the Superior Province is their occurrence within or immediately adjacent to greenstone belts. The faults, and associated splays, which control gold mineralization, are typically part of a larger deformational zone that can reach kilometers in thickness and several hundred kilometers in strike. There are three types of gold mineralization identified in the area: (a) in quartz veins hosted in volcanic rocks and felsic dikes within shear zones, (b) in narrow semi-massive sulphide bands filling fissures, and (c) in altered rocks within shear zones with or without quartz veins.

The author visited the Property on May 23, 2020 to verify historical exploration work, including various drill programs, trenching and channel sampling programs, mineralized outcrops and to collect necessary geological data. A total of six samples were collected by the author from historical channel sampling and other exploration areas and were delivered to Polymet Laboratories in Cobalt, Ontario for analyses. The sample assay results indicated gold (Au) values in the range of 0.057 grams per ton (g/t) to 4.03 g/t while one sample (31523) was below laboratories detection limits (0.028 g/t). Highest Silver values of 26.31 were in sample 31518 and the lowest 1.3 g/t was sample 31523 while four samples were below the laboratories detection limits. These results are consistent with historical trenching results.

The data presented in this report is based on published assessment reports available from Soldera, Ontario ENDMF, the Geological Survey of Canada, and the Ontario Geological Survey. All the consulted data sources are deemed reliable. The data collected during present study is considered enough to provide an opinion about the merit of the Property as a viable exploration target.

There are some risks associated with this Property. Although historical exploration work has been carried out on the Property with some good results, it is still an early stage exploration Property with no mineral resource.

Based on its favourable geological setting indicating shear hosted gold mineralization in trenches and drill holes and the findings of the present study, it is concluded that the Property is a Property of merit and possesses a good potential for discovery of economic concentration of gold mineralization through further exploration. Good road access, availability of exploration and mining services in the vicinity makes it a worthy mineral exploration target. The historical exploration data collected on the Property provides the basis for a follow-up work program.

The author believes the present study has met its original objectives.

26.0 RECOMMENDATIONS

In the author's opinion, the character of the Property is enough to merit the following two-phase work program, where the second phase is contingent upon the results of the first phase.

Phase 1 – Geophysical Surveys, Prospecting, Trenching and Sampling

The historical work at the Property was mainly focussed on the main Titan and Morrow showings, however the geophysical survey data indicates a northwest southeast trending structural corridor of 1.67 to 4 kilometres in length along strike within Morrow Lake Deformation Zone (MLDZ) which can be a potential target for further exploration. The results of ground geophysical survey indicate that magnetic anomalies provide better control of finding gold mineralization for exploration. It is recommended to fill the gap in 2020 VLF survey, and continue prospecting, trenching, and sampling work along MLDZ.

Total estimated budget for Phase 1 program is \$157,630 (Table 11) and it will take about three months' time to complete this work.

Phase 2 – Detailed Drilling and Resource Estimation

If results from the first phase are positive, then a detailed drilling program would be warranted to check the most promising targets identified during geological mapping, trenching, and sampling work in Phase 1. The scope of work for drilling and location of drill holes would be determined based on the findings of Phase 1 investigations.

26.1 Budget

Table 11: Phase 1 budget

Item	Unit	Unit Rate (\$)	Number of Units	Total
Mapping, Trenching and Sampling				
Geological mapping (geologist 1)	days	\$600	7	\$4,200
Geological mapping (geologist 2)	days	\$600	7	\$4,200
Prospecting (2-person crew)	days	\$800	14	\$11,200
Ground geophysical survey	line-km	\$2,000	15	\$30,000
Excavator for stripping	hrs.	\$120	60	\$7,200
Mob and demob of excavator	ls	\$1	2000	\$2,000
Channel cutting and sampling	m	\$500	25	\$12,500
Accommodations and Meals	day	\$250	100	\$25,000
Supplies	ls	\$5,000	1	\$5,000
Sample Assays	sample	\$100	150	\$15,000
Transportation Road	km	\$1	10,000	\$10,000
Data Compilation	days	\$700	10	\$7,000
Report Writing	days	\$700	10	\$7,000
Project Management	days	\$750	4	\$3,000
Sub Total				\$143,300
Contingency 10%				\$14,330
Total Phase 1 Budget				\$157,630

27.0 REFERENCES

- 1.0 A. O. Sergiades, 1968; Silver Cobalt Calcite Vein Deposits of Ontario. Ontario Department of Mines.
- 2.0 Beakhouse, G.P. (1985). Institute on Lake Superior Geology Thirty-First Annual Meeting, Titan 1985.
- 3.0 Colvine, A.C. et al. 1988. Archean Lode Gold Deposits in Ontario; Ontario Geological Survey, Miscellaneous Paper 139, 136p.
- 4.0 Diamond Drilling (1962). Klotz Lake – Report No. 10.
- 5.0 Diamond Drilling. (1984). Klotz Lake – Exploration Banque-Or Inc – Report No. 17.
- 6.0 Diamond Drilling. (1984). Klotz Lake – Getty Canadian Metals - Report No. 21.
- 7.0 Drabble, M. and Cervoj, K. (2017). Optiro: Technical Report on the Cameron Gold Deposit, Ontario, Canada.
- 8.0 D. Stone, 2010; Precambrian Geology of the Central Wabigoon Subprovince Area, Northwestern Ontario. Ontario Geological Survey Open File Report 5422.
- 9.0 Dunbar, P. (2013). Titan Soil Gas Hydrocarbon Survey Report, Thunder Bay Mining Division, Ontario.
- 10.0 Holmstead, W.E. (1982). Report on the Propert “Klotz Lake” District of Thunder Bay Ontario.
- 11.0 Innes, D.G. and Ayres, L.D. 1971. Caramat-Pagwa River sheet, geological compilation series, Algoma, Cochrane and Thunder Bay districts; Ontario Department of Mines and Northern Affairs, Map 2202, 1:253 440.
- 12.0 John F. Slack, 2013; Descriptive and Geo-environmental Model for Cobalt-Copper-Gold Deposits in Metasedimentary Rocks. Chapter G of Mineral Deposit Models for Resource Assessment.
- 13.0 Kodiak Exploration Limited (2010). Appendix B Milestone Project. Report No. 20006567.
- 14.0 Kodiak Exploration Limited (2009). Appendix C Milestone Project: Certificate of Analysis. Report No 20008566.
- 15.0 Kodiak Exploration Limited (2010). Milestone Property; Report No. 20008568.
- 16.0 Kodiak Exploration Limited. (2010). Appendix 1 2010 Prospecting Grab Samples Milestone/Klotz Lake Projects; Report No. 20012313.

- 17.0 Martin, L.C., & Tremblay, G.A. (1984). 1984 Drill Summary Report October-November 1984 Klotz Lake Property Main Block.
- 18.0 Mateeva, T. & Hinzer, J. (2012). A Technical Review of the Drock East Gold Project, Ontario, Canada for Goldstream Exploration Ltd.
- 19.0 Matrix Geotechnologies Ltd. (2012). Assessment Report Regarding the IP/Resistivity and Magnetic Surveys at Solarus Grid, Longlac, Ontario on behalf of Goldstream Exploration Ltd. Toronto, Ontario.
- 20.0 Mazurski, M. (1984). 1983 Drill Programme Report on the Klotz Lake Property 42 F/13 Northern Ontario.
- 21.0 Ministry of Northern Development and Mines-CLA Maps. (2016). Titan Gold Prospect.
- 22.0 Morton, S. & Moore, E. (2011). Report on the Milestone/Klotz Lake Project Phase II of 2010 Exploration Program Surface and Drilling Programs Castlebar Lake and Klotz Lake Areas Thunder Bay Mining Division, Northwestern Ontario.
- 23.0 Pearson, A. (2017). Technical Report on Prospecting for the Pleson-Titan Property; Klotz Lake Area, Thunder Bay Mining Division Ontario, Canada.
- 24.0 Prodigy Gold Incorporated (2010). Map A: 2010 Prodigy Geological Mapping of Klotz Lake and Milestone Properties.
- 25.0 Robert, F., Brommecker, R., Bourne, B.T., Dobak, P. J., McEwan, C.J., Rowe, R.R. and Zhou, X. (2007). Models and Exploration Methods for Major Gold Deposit Types.
- 26.0 Sica, C. & Dunbar, P. (2012). Report on the Titan Klotz Lake Property Hardrock East Project 2012 Diamond Drill Program, Thunder Bay Mining Division, Ontario.
- 27.0 S.C. Zoltai, 1965; Glacial Features of the Quetico-Nipigon Area, Ontario. Research Branch, Ontario Department of Lands of Forests, Maple, Ontario. January 4,
- 28.0 Shields, S. (1996). Beep Mat Survey of Tomorrow Lake; Klotz Lake Area District of Thunder Bay.
- 29.0 Sutherland, D. (2013). 3D-SGH "A Spatialtemporal Geochemical Hydrocarbon Interpretation" Goldstream Exploration Ltd. KL- Titan Project.
- 30.0 Titaro, D. (1987). Report on the Klotz Lake J.V. Work Program for Getty Resources Ltd.
- 31.0 Vanstone, P. (2010). Report on the 2009/2010 Diamond Drill Program on the Milestone Project, Castlebar Lake and Klotz Lake Areas, Northwestern Ontario, District of Thunder Bay.

32.0 Wilson, A. (2014). Mineral Deposit Inventory for Ontario.

33.0 Websites:

<http://gsabulletin.gsapubs.org/content/80/9/1725.short#>

http://www.thunderbaydirect.info/about_thunder_bay

http://www.thunderbay.ca/Doing_Business/About_Thunder_Bay.htm

<http://www.mnsu.edu/urc/journal/URC2007journal/Drommerhausen.pdf>

http://www.empr.gov.bc.ca/Mining/Geoscience/PublicationsCatalogue/GeoFiles/Pages/1996-1_sediment.aspx

http://www.geologyontario.OND.gov.on.ca/ONDfiles/afri/data/imaging/20000015340/20000015340_01.pdf

http://www.geologyontario.OND.gov.on.ca/ONDfiles/afri/data/imaging/20000014840/2_56963_10_TechnicalReport2016.pdf

<https://weatherspark.com/y/14340/Average-Weather-in-Greenstone-Canada-Year-Round#Sections-Humidity>

<http://greenstone.ca/>

<http://www.actlabsint.com/page.aspx?page=1454&app=226&cat1=549&tp=12&lk=no&menu=64>

<https://firstmininggold.com/projects/ontario/cameron-Property/>

28.0 SIGNATURE PAGE

The effective date of this Technical Report, titled "Technical Report on the Titan Gold Property, Klotz Lake Area, NTS Map 42F, Thunder Bay Mining District, Northwestern Ontario, Canada", is June 12, 2020.



Martin Ethier, P. Geol.

Dated this 12th day of June 2020

29.0 CERTIFICATE OF AUTHOR

I, Martin Ethier, P.Geo., as the author of this report entitled, “Technical Report on the Titan Gold Property, Klotz Lake Area, NTS Map 42F, Thunder Bay Mining District, Northwestern Ontario, Canada”, dated June 12, 2020, do hereby certify:

1. I have been working since 2000 as a geologist / remote sensing / GIS specialist in the mining industry on a variety of properties. I have been a consulting geologist since 2002 with Hinterland Geoscience & Geomatics – 620 Brewster St. Haileybury Ontario P0J 1K0.
2. I graduated with a Bachelor of Arts, from Mount Alison University of Sackville New Brunswick (1997), majoring in Geography, and minors in Geology as well as Environmental Studies. In addition, I completed an intensive Post Graduate Advanced Diploma in Remote Sensing and Geographic Information systems from the Centre of Geographic Sciences (COGS) in Lawrencetown (1998), Nova Scotia. Furthermore, have obtained a Master of Science in Geology from Acadia University in Wolfville (2001), Nova Scotia.
3. This certificate applies to the report entitled, “Technical Report on the Titan Gold Property, Klotz Lake Area, NTS Map 42F, Thunder Bay Mining District, Northwestern Ontario, Canada”, dated June 12, 2020.
4. I am professional Geologist and a member of “Ordre de Geologues du Quebec” (Member #: 1520), Canada.
5. I have worked for the last 19 years as a geologist / remote sensing / GIS specialist in the mining industry on a variety of exploration properties such as diamond bearing kimberlites, silver-cobalt deposits, gold, and Ni-Cu-PGE. In particular, I have worked on gold exploration projects in the Abitibi (Ontario/Quebec) Porcupine/Destor, Cadillac Larder Areas as well as the Temagami Greenstone Belt.
6. I have read the definition of “qualified person” set out in National Instrument 43-101 (“NI43-101”) and certify that by reason of my education, affiliation with professional associations and past relevant work experience, I fulfill the requirements to be a “qualified person” for the purpose of NI43-101.
7. I visited the Titan Gold Property on May 23rd, 2020.
8. I am responsible for all items of this report.
9. I have no interest, direct or indirect in the Titan Gold Property, nor do I have any interest in any other properties of Soldera or the vendors.

10. I am independent of Soldera and the property vendors as defined in Section 1.5 of NI 43-101.
11. I have no prior involvement with the Titan Gold Property other than as disclosed in item 7 of this certificate.
12. I have read National Instrument 43-101 ("NI43-101"), and the Technical Report has been prepared in compliance with NI43-101, and Form 43-101F1.
13. I am not aware of any material fact or material change with respect to the Titan Gold Property the omission of which would make this report misleading.
14. I consent to the filing of the Technical Report with any stock exchange and other regulatory authority and any publication by them, including electronic publication in the public company files on their websites accessible by public.
15. As at the date of this certificate, to the best of my knowledge, information, and belief the technical report contains all scientific and technical information that is required to be disclosed to make the technical report not misleading.



Martin Ethier, P.Geol.

Dated: June 12, 2020